

Errata

Title & Document Type: 3586A/B/C Selective Level Meter Service Manual - Volume 1

Manual Part Number: 03586-90002V1

Revision Date: May 1983

HP References in this Manual

This manual may contain references to HP or Hewlett-Packard. Please note that Hewlett-Packard's former test and measurement, semiconductor products and chemical analysis businesses are now part of Agilent Technologies. We have made no changes to this manual copy. The HP XXXX referred to in this document is now the Agilent XXXX. For example, model number HP8648A is now model number Agilent 8648A.

About this Manual

We've added this manual to the Agilent website in an effort to help you support your product. This manual provides the best information we could find. It may be incomplete or contain dated information, and the scan quality may not be ideal. If we find a better copy in the future, we will add it to the Agilent website.

Support for Your Product

Agilent no longer sells or supports this product. You will find any other available product information on the Agilent Test & Measurement website:

www.tm.agilent.com

Search for the model number of this product, and the resulting product page will guide you to any available information. Our service centers may be able to perform calibration if no repair parts are needed, but no other support from Agilent is available.

SELECTIVE LEVEL METER

3586A/B/C

VOLUME I



Performance Tests
Adjustments
Replaceable Parts
Manual Changes



HEWLETT
PACKARD

SERVICE MANUAL

MODEL 3586A/B/C

SELECTIVE LEVEL METER

(Including Options 001, 002, 003, and 004)

VOLUME I

IMPORTANT NOTICE

This manual applies to all instruments. Earlier versions of the 3586A/B/C, however, may differ in design and appearance from the instruments this revision documents directly. Changes that have been made to the instrument and which affect the instrument's documentation are identified by the delta (Δ) symbol. The "numbered" Δ refers the reader to the corresponding numbered Δ in the backdating section (Section VII) in Volume I of the 3586A/B/C Service Manual.

WARNING

To prevent potential fire or shock hazard, do not expose equipment to rain or moisture.

This service manual contains no operating information. For Sections I to III (Operation), see the 3586A/B/C Operating Manual (Part No. 03586-90012, Microfiche Part No. 03586-90062).

Manual Part No. 03586-90002
Microfiche Part No. 03586-90052

©Copyright Hewlett-Packard Company 1979
P.O. Box 301, Loveland, Colorado, 80537 U.S.A.

Printed: May, 1983

TABLE OF CONTENTS

| Section | Page |
|---|------|
| 4-1. Introduction | 4-1 |
| 4-3. Equipment Required | 4-1 |
| 4-5. Test Record | 4-1 |
| 4-7. Calibration Cycle | 4-1 |
| 4-9. Performance Tests | 4-1 |
| 4-13. Center Frequency Accuracy | 4-2 |
| 4-15. Counter Sensitivity & Accuracy | 4-3 |
| 4-17. Return Loss | 4-4 |
| 4-19. Balance | 4-8 |
| 4-21. *Amplitude Accuracy | 4-12 |
| 4-23. Half-Power Bandwidths (– 3dB) | 4-24 |
| 4-25. Pass-Band Flatness | 4-25 |
| 4-27. 400Hz Filter Shape | 4-26 |
| 4-29. Pilot (20Hz) Filter Bandwidths | 4-26 |
| 4-31. Carrier Frequency Rejection | 4-28 |
| 4-33. Adjacent Channel Rejection | 4-29 |
| 4-35. *Residual Noise | 4-30 |
| 4-37. Residual Spurious Responses | 4-31 |
| 4-39. Spurious Responses With Input | 4-32 |
| 4-41. *Harmonic Distortion | 4-34 |
| 4-43. *Intermodulation Distortion | 4-37 |
| 4-45. IF Rejection | 4-40 |
| 4-47. Wideband Power Flatness | 4-40 |
| 4-49. Tracking Output Test (“f ₀ 0-32MHz” on Rear Panel | 4-42 |
| 4-51. Phase Jitter Accuracy (Option 003 only) | 4-43 |
| 4-53. Residual Phase Jitter Option 003 only) | 4-43 |
| 4-55. WTD Filter (Option 003 only) | 4-44 |
| 4-57. Notch Filter (Option 003 only) | 4-45 |
| 4-59. Impulse Noise (Option 003 only) | 4-46 |

SECTION IV PERFORMANCE TESTS

4-1. INTRODUCTION.

4-2. The performance test procedures in this section should be used to verify the specifications for the 3586A/B/C as given in Section I of the operating manual and Section VIII of the service manual. All of the tests are done without opening the cabinet.

4-3. EQUIPMENT REQUIRED.

4-4. Equipment required for the performance tests is listed in Table 4-9. Equipment with specifications that meet or exceed those of the recommended equipment may be substituted. Remember to keep cables as short as possible, especially when using high frequencies.

4-5. TEST RECORD.

4-6. Results from the performance tests may be recorded in the Test Record found at the end of Section IV. Listed in the Test Record are the performance limits for each parameter tested. The Test Record may be copied without permission from -hp- and used for periodic testing or troubleshooting.

4-7. CALIBRATION CYCLE.

4-8. These performance tests should be done every year and after repairs to assure proper operation of the instrument.

4-9. PERFORMANCE TESTS.

4-10. Each performance test is independent of the others. A brief description, followed by performance specifications and a list of required equipment, precedes the procedures for each test. A significant amount of time is required to follow the performance tests through to completion. The tests listed in the Table of Contents which are preceded by an asterisk (*), contain procedures which can be abbreviated and still provide an accurate measure of the instrument's performance.

4-11. For the most part, each test begins by initializing the 3586A/B/C. This consists, simply, of setting up the instrument to the state it is in immediately after turn-on and auto-cal. Initializing the instrument can be done by entering all the appropriate functions manually or by

pressing RECALL , 0 .

The instrument should not, however, be turned off and on because of the required stabilizing time of 20 minutes. The initialized state consists of:

| | |
|------------|------|
| AUTO-CAL | ON |
| RANGE | 10dB |
| FULL SCALE | AUTO |

| | | |
|-----------------------------|---|---------|
| UNIT | | dBm |
| ENTRY FREQUENCY SSB CHANNEL | | CARRIER |
| CHANNEL | | ↗ |
| COUNTER | | OFF |
| MEASUREMENT | | LO DIST |
| TERMINATION | 75Ω (Rev. A Controller ROMs) 10kΩ (Rev. B Controller ROMs) | |
| BANDWIDTH | 3100Hz, 2000Hz, or 1740Hz | |
| entered frequency | | 1MHz |

NOTE

Most of the performance tests require that the 3586 have the "75Ω" input termination impedance selected. If the instrument has Rev. B controller ROM's installed (as indicated by the instrument initializing in the 10kΩ termination impedance), the operator must manually select the 75Ω impedance each time after pressing RECALL, 0.

4-12. Initializing the -hp-3335A can be done similarly by



providing the zero register is unchanged from the time of power cycling.

4-13. Center Frequency Accuracy.

4-14. This test checks the accuracy of the 10MHz Reference Output of the 3586A/B/C. Of course, using a sufficiently accurate counter to measure the frequency of this output is a valid method. However, in the case where no such counter is available, the following procedure is equally valid.

Specifications:

Frequency 9,999,900Hz to 10,000,100Hz

Equipment Required:

Oscilloscope -hp-180A/1808A/1821A
 Frequency Reference ("oven") -hp- 3335A opt. 001
 (3)25Ω .1% Resistors (see Figure 4-9) -hp- Part No. 0698-8011

Procedure:

- a. Use the power combiner illustrated in Figure 4-9 to combine the output of the Frequency Reference (10MHz oven output on rear panel of the -hp- 3335A opt. 001) to the 10MHz output of the 3586A/B/C. Connect the output of the combiner to the vertical input of the oscilloscope.

b. When summing two frequencies together, they will “beat” at a rate corresponding to the difference of the two frequencies. This beating can be seen on the oscilloscope as an amplitude variation of the composite signal; this is caused by the two signals (which should be close in frequency) moving in and out of phase with one another.

c. Adjust the time base of the scope so that about one period of the beat frequency can be seen. Adjust the trigger of the scope so that the beating period is not moving across the display.

d. The period of this “beating” should be no less than 10 milliseconds.

4-15. Counter Sensitivity & Accuracy.

4-16. This test assures accurate counter readings for the specified minimum sensitivity.

Specifications:

| | |
|-------------|--------------------|
| Sensitivity | - 100dBm |
| Accuracy | - 1.0Hz to + 1.0Hz |

Equipment:

| | |
|--|--|
| Synthesizer/Level Generator | -hp- 3335A |
| Attenuator (capable of 20dB attenuation) | -hp- 355D |
| (3) 75Ω Coaxial BNC cables | hp- Part No. 11652-60014 |
| Adapter (see Table 4-1) | |
| Minimum Loss Pad (50Ω to 75Ω) | -hp- 11852A (pad) 1250-1536 (adaptor) 1250-1473 (adaptor) |

Procedure:

a. Initialize both instruments by

pressing RECALL , 0

b. Connect the 10MHz output of the 3586A/B/C to the reference input of the Synthesizer/Level Generator.

c. Connect the 50Ω output of the 3335A to the input of the attenuator, and the output of the attenuator to the 75Ω input of the 3586A/B/C using the appropriate adaptor (see Table 4-1) as needed. Use 75Ω cables.

d. Set the attenuator to - 20dB.

e. Set the Synthesizer/Level Generator to 1MHz at - 72dBm.

f. Decrement the output level of the Synthesizer/Level Generator by steps of about 0.1dB until the 3586A/B/C reads a level of - 100.0dBm.

g. Turn on the counter of the 3586A/B/C. Make sure the counter is reading a frequency anywhere from 999,999.0Hz to 1,000,001.0Hz.

4-17. Return Loss.

4-18. This test verifies that the return loss for each input of the 3586A/B/C is within its specified limits.

Specifications:

| | |
|---------------------------------|------|
| 50Ω, 75Ω inputs | |
| 50Hz to 32.5MHz | 30dB |
| 124Ω input, 10kHz to 5MHz | 30dB |
| 150Ω, 135Ω input, 10kHz to 1MHz | 30dB |
| 600Ω input, 50Hz to 108kHz | 25dB |

Equipment Required:

| | |
|---|---|
| Synthesizer/Level Generator | -hp- 3325A |
| Synthesizer/Level Generator | -hp- 3335A |
| (2)50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |
| Spectrum Analyzer | -hp- 141T/8553B/8552B |
| 50Ω Directional Bridge (3586C only) | -hp- 8721A(standard) |
| 75Ω Directional Bridge | -hp- 8721A opt. 008 |
| 124Ω Directional Bridge (3586B only) | -hp- Part No. 5061-1136 |
| 124Ω Directional Bridge (3586B with opt. 001) | -hp- Part No. 5061-1137 |
| 150Ω Directional Bridge (3586A only) | -hp- Part No. 5061-1135 |
| Digital Multimeter | -hp- 3455A opt. 001 |
| Mini-WECO to (f)BNC adapter (3586B Standard) | -hp- Part No. 1250-0556 |
| (2)BNC “T” | -hp- Part No. 1250-0781 |
| Large-WECO to (f)BNC adapter (3596B opt. 001 only) | -hp- 1250-0591 |
| 600Ω feedthrough (see Figure 4-1c) | |
| Siemens 1.6/5.6 to (f)BNC adapter (3586A with opt. 001 only) | W&G Part No. S230 |
| (2) 75Ω coaxial BNC cables | -hp- Part No. 11652-60013 |
| (m)BNC to (m) BNC adapter | -hp- 1250-1288 |
| (2) (m)BNC to single banana jack | Pomona, Part No. 3430-0 |
| (m) 1/4” phone to (f) BNC adapter | -hp- Part No. 1251-3759 |

Procedure:

- a. Connect the equipment as shown in Figure 4-1a. Attach a (m)BNC to (m)BNC adapter to the “LOAD” terminal of the 75Ω Directional Bridge. To this adapter, attach an appropriate adapter as shown in Table 4-1.

Table 4-1. 75Ω Input Adapters.

| Model | Adapter |
|------------------------|--|
| 3586A with opt. 001 | Siemens 1.6/5.6 to (f)BNC (W & G, Part No. S230) |
| 3586B without opt. 001 | Mini-WECO to (f)BNC (-hp- Part No. 1250-0556) |
| 3586B with opt. 001 | Large-WECO to (f)BNC (-hp- Part No. 1250-0591) |

b. Initialize the 3586A/B/C/ by

pressing RECALL 0 .

Turn the Cal off.

c. Set the output of the Synthesizer/Level Generator to 1MHz at 0dBm.

d. Set up the Spectrum Analyzer so that the scale is .1MHz/division, and the reference is -10dB on a 10dB/div. log scale. On an -hp- 141T/8553B/8552B, this corresponds to the controls set as follows:

| | |
|---------------|------------|
| Bandwidth | 10kHz |
| Scan width | .1MHz/Div. |
| Input Atten | 0dB |
| Scan time | 2msec/Div. |
| Log reference | -10dB |
| Video filter | OFF |
| Trigger | INT |

The storage capability is not needed yet.

e. Tune the Spectrum Analyzer to a center frequency of 1MHz.

f. Since the 75Ω Bridge is not connected to the input of the 3586A/B/C, the reflected signal can be used to set a reference level on the Spectrum Analyzer. With the 1MHz signal in the center of the screen, adjust the reference level so that the signal coincides with the top of the scale.

g. Connect the “LOAD” terminal of the 75Ω bridge to the 75Ω input of the 3586A/B/C. The signal should have lowered to at least 30dB below the top of the scale.

h. Repeat steps c through g tuning the Synthesizer/Level Generator and the Spectrum Analyzer to 32.5MHz.

i. If testing a 3586C, repeat steps a through h switching the 3586C to its 50Ω input and using the 50Ω Directional Bridge. Also, the Minimum Loss Pads should be removed and the 75Ω cables replaced with 50Ω cables (-hp- 11170B).

NOTE

Steps j. through p. apply to the 3586A only. For a 3586B, proceed to step q. For a 3586C, proceed with step aa.

j. Replace the 75Ω Directional Bridge with the 150Ω Directional Bridge, leaving the bridge disconnected from the 3586A.

k. Tune the Synthesizer/Level Generator and the Spectrum Analyzer to 1MHz.

l. Adjust the reference level on the Spectrum Analyzer so that the signal is at the top of the scale.

m. Insert the “LOAD” terminals of the 150Ω Directional Bridge into the 150Ω input of the 3586A; select the 150Ω input. The level of the signal should have lowered by at least 30dB.

n. Tune the Synthesizer/Level Generator to 10kHz. Unplug the 150 Ω bridge from the 3586A. Readjust the Spectrum Analyzer so that the controls are set as follows:

| | |
|---------------|------------|
| Bandwidth | .3kHz |
| Scan Width | 5kHz/Div. |
| Input Atten | 0dB |
| Scan time | .1sec/Div. |
| Log Reference | - 10dB |
| Video Filter | OFF |
| Trigger | INT |

Storage should be on for this test.

o. Tune the Spectrum Analyzer to just above zero hertz, such that a display as shown in Figure 4-2 is obtained. The first signal (from the left) is an image spur from the input signal (10kHz). The second spur is L.O. feedthrough of the Spectrum Analyzer. The third signal is the actual 10kHz; the reference level should be adjusted so that this signal is even with the top of the scale. The last two, small spurs are the second and third order harmonics of 10kHz.

p. Plug the 150 Ω bridge into the 150 Ω input of the 3586A. The 10kHz signal should have lowered by at least 30dB.

NOTE

Steps q through z apply to the 3586B only. For a 3586A or 3586C, proceed to step aa.

q. Replace the 75 Ω Directional Bridge with the 124 Ω Directional Bridge leaving the bridge disconnected from the 3586B.

r. Tune the Synthesizer/Level Generator and the Spectrum Analyzer to 5MHz.

s. Adjust the reference level of the Spectrum Analyzer so that the signal is at the top of the scale.

t. Insert the "LOAD" terminal of the 124 Ω bridge into the 124 Ω input of the 3586B; select the 124 Ω input. The level of the signal should have lowered by at least 30dB.

u. Tune the Synthesizer/Level Generator to 10kHz; unplug the 124 Ω bridge from the 3586B.

v. Perform the Spectrum Analyzer set-up procedures as listed in step n; perform step o.

w. Plug the 124 Ω bridge into the 3586B. The signal should have lowered by at least 30dB.

x. Disconnect the bridge from the 3586B. Insert a mini-WECO to (f)BNC adapter (use a large-WECO to (f)BNC for an opt. 001) into the top jack of the 124 Ω input. Insert a 1/4" phone plug to (f)BNC adapter into the top jack of the 135 Ω input. Connect a (m)BNC to single banana jack adapter to each of these adapters. Measure the resistance between these two banana jacks using the digital multimeter.

NOTE

This measurement is made with the "2 Wire" function and ".1k" range selected on the 3455A.

y. The resistance should be from 19.9Ω to 21.31Ω (DMM tolerances included). The 124Ω and 135Ω inputs are interactive. Since the return loss of the 124Ω input has been measured, the return loss of the 135Ω input can be verified with a simple resistance check.

z. Repeat steps x and y reinserting the adapters into the lower balanced jacks of the 124Ω and 135Ω inputs.

aa. Connect the equipment as shown in Figure 4-1b. It is not necessary to have the -hp- 3586A/B/C turned on for this test.

bb. Tune the -hp- 3325A to 50Hz at +7dBm. Measure and record the ac voltage at point A. This will be defined as: V_A .

cc. Measure and record the ac voltage at point B; this is V_B .

dd. Calculate the return loss using the following formula:

$$\text{Return Loss} = -20 \log \frac{2V_B - V_A}{V_A}$$

ee. Repeat steps bb through dd for a frequency of 108kHz.

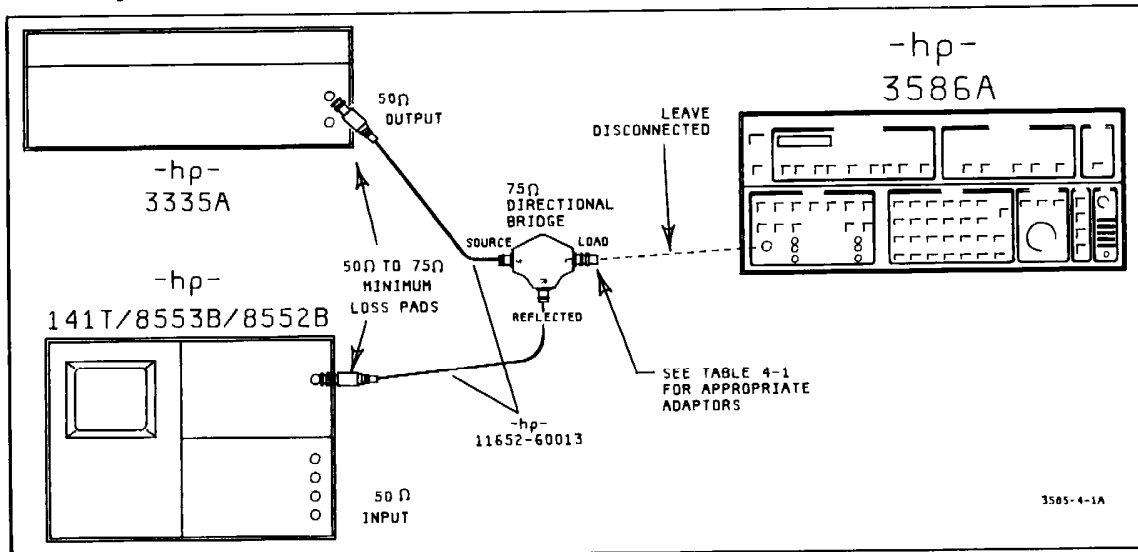


Figure 4-1a. Return Loss Set-Up.

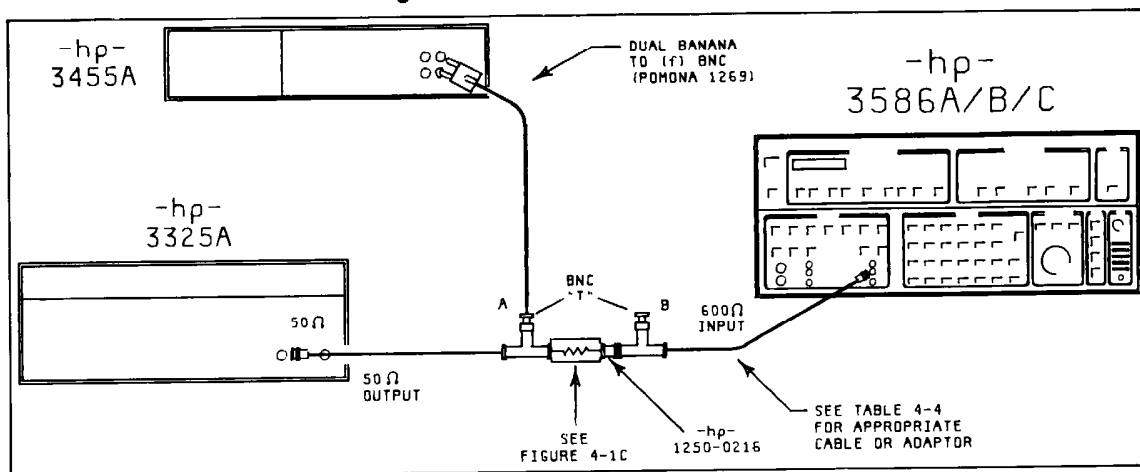


Figure 4-1b. Return Loss Set-Up (600Ω).

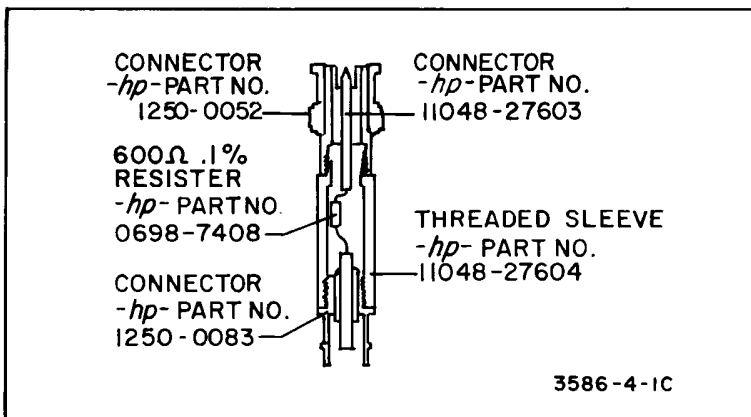


Figure 4-1c. 600Ω .1% Feedthrough.

4-19. Balance.

4-20. The purpose of this test is to ensure that the balanced inputs of the 3586A/B/C are balanced to within their specified limits.

Specifications:

| | |
|---------------------------|--------|
| 124Ω, 10kHz to 10MHz | – 36dB |
| 135Ω, 150Ω, 10kHz to 1MHz | – 36dB |
| 600Ω, 50Hz to 108kHz | – 40dB |

Equipment Required:

| | |
|--|---|
| Synthesizer/Level Generator | -hp- 3325A |
| 124Ω Balance testing apparatus (see Figure 4-5), 3586B only | |
| 135Ω Balance testing apparatus (see Figure 4-5), 3486B only | |
| 150Ω Balance testing apparatus (see Figure 4-4), 3486A only | |
| 600Ω Balance testing apparatus (see Figure 4-4) | |
| (2) — 75Ω BNC coaxial cables | -hp- Part No. 11652-60014 |
| (2) — 75Ω BNC coaxial cables | -hp- Part No. 11652-60012 |
| Cable with a Siemens 3-prong plug and a male BNC (3586A only) | W&G K164 |
| Male WECO 310 to female BNC adapter (3586B only) | -hp- Part No. 1251-3757 |
| Dual banana plug to female BNC adapter (3586C only) | -hp- Part No. 1251-2277 |
| (3) — Mini-WECO plug to female BNC adapter (3586A without option 001) | -hp- Part No. 1250-0556 |
| (3) — large WECO plug to female BNC adapter (3586B w/option 001 only) | -hp- Part No. 1250-0591 |
| (2) — 1/4" phone plug to female BNC adapter (3586B only) | -hp- Part No. 1251-3759 |
| Male Siemens 1.6/5.6 to female BNC adapter (3586A with option 001 only) | W&G S230 |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

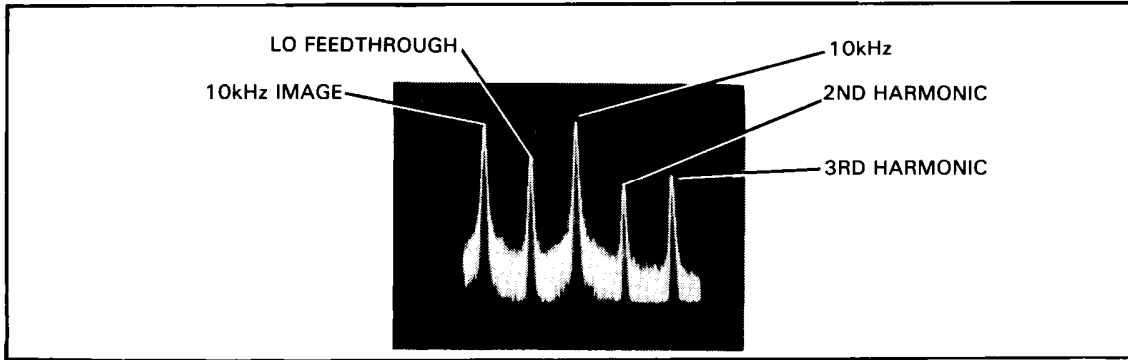


Figure 4-2. 10kHz And Friends As Viewed From An -hp-141T/8553B/8552B.

Procedure:

- a. Connect the equipment as shown in Figure 4-3, using the cables and adapters as indicated in Table 4-2.

Table 4-2. 75Ω Input And 600Ω Input Cables And Adapters.

| NOTE | | |
|--|--|--|
| <i>The Siemen's 3-prong to male BNC cable must be modified so that the two conductors of the BNC plug correspond to the two balanced lines of the Siemen's 3-prong plug; the balanced lines of the Siemen's 3-prong are the 12mm spaced plugs. An optional cable assembly can consist of two single banana plugs on one end and a male BNC on the other end.</i> | | |
| Model Number | Cables For 75Ω Input | Cables For 600Ω Input |
| 3586A without option 001 | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012) | Cable with Siemens 3-prong and male BNC (W&G Part No. K164) |
| 3586A with option 001 | 75Ω BNC coaxial cable (-hp- 11652-60012), Siemens 1.6/5.6 to (f)BNC adapter (W&G Part No. S230) | Cable with Siemens 3-prong and male BNC (W&G Part No. K164) |
| 3586B without option 001 | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012), Mini-WECO plug to (f)BNC adapter (-hp- Part No. 1250-0556) | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012), WE-310 plug to (f)BNC adapter (-hp- Part No. 1251-3757) |
| 3586B with option 001 | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012), large WECO plug to (f)BNC adapter (-hp- Part No. 1250-0591) | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012, WE-310 plug to (f)BNC adapter (-hp- Part No. 1251-3757) |
| 3586C | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012) | 75Ω BNC coaxial cable (-hp- Part No. 11652-60012), dual banana plug to (f) BNC adapter (-hp- Part No. 1251-2277) |

- b. Initialize the 3586A/B/C by pressing RECALL , 0 .
- c. Set the output of the Synthesizer/Level generator to 50Hz at +10dBm.
- d. Select the 20Hz bandwidth of the 3586A/B/C. Tune the 3586A/B/C to 50Hz. Select the 10kΩ||50pF input. Press the AVERage key.
- e. Press RDNG→
OFFSET , and turn the OFFSET on.

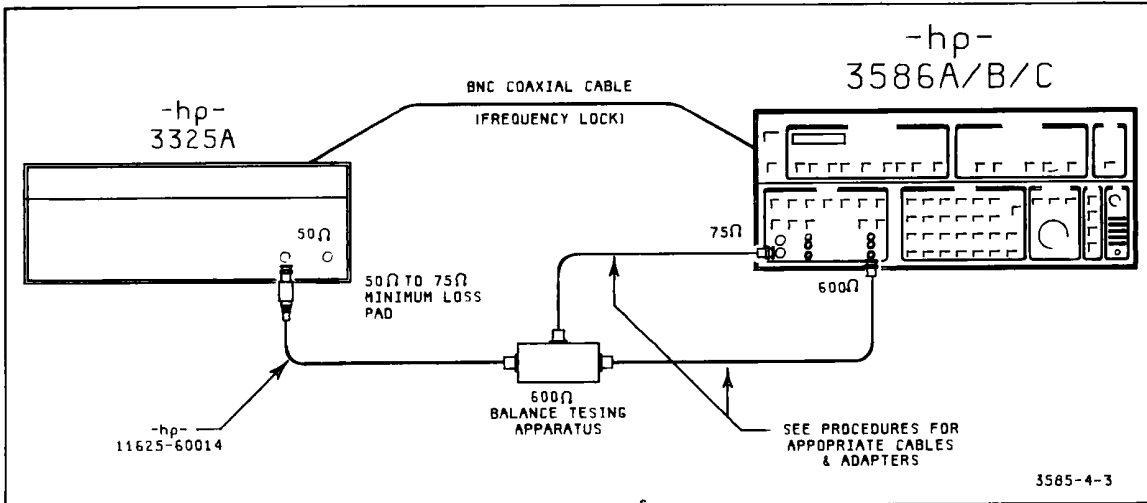


Figure 4-3. Initial Equipment Set-Up For Balance Testing.

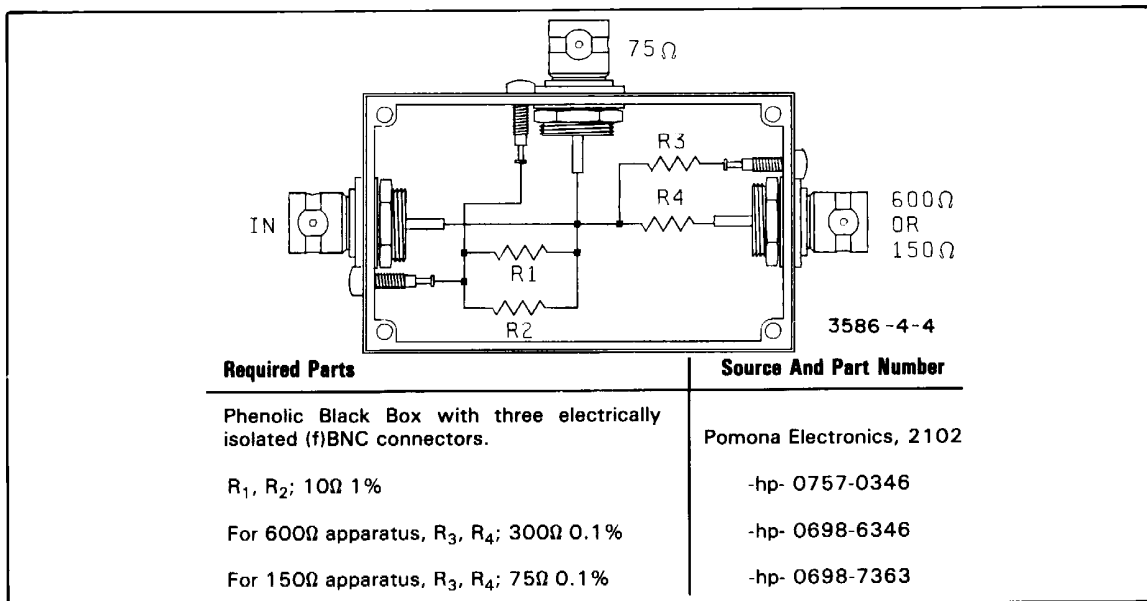


Figure 4-4. 600Ω and 150Ω Balance Testing Apparatus.

f. Disconnect the cable from the 75Ω input. Select the 600Ω input. The reading of 3586A/B/C should be less than or equal to -40dBm0.

g. Repeat steps c through f for a frequency of 100kHz.

NOTE

Steps h through k apply only to Model -hp- 3586A. For an -hp- 3586B, procede to step l.

h. From the previous test set-up, replace the 600Ω balance testing apparatus with the 150Ω balance testing apparatus (Figure 4-4). Unplug the Siemens 3-prong from the 600Ω input and plug it into the 150Ω input. Reconnect the 75Ω output of the balance testing apparatus to the 75Ω input of the 3586A.

i. Set the output of the synthesizer/level generator to 10kHz at a level of +10dBm. Tune the 3586A to 10kHz. Select the 10kΩ||50pF input.

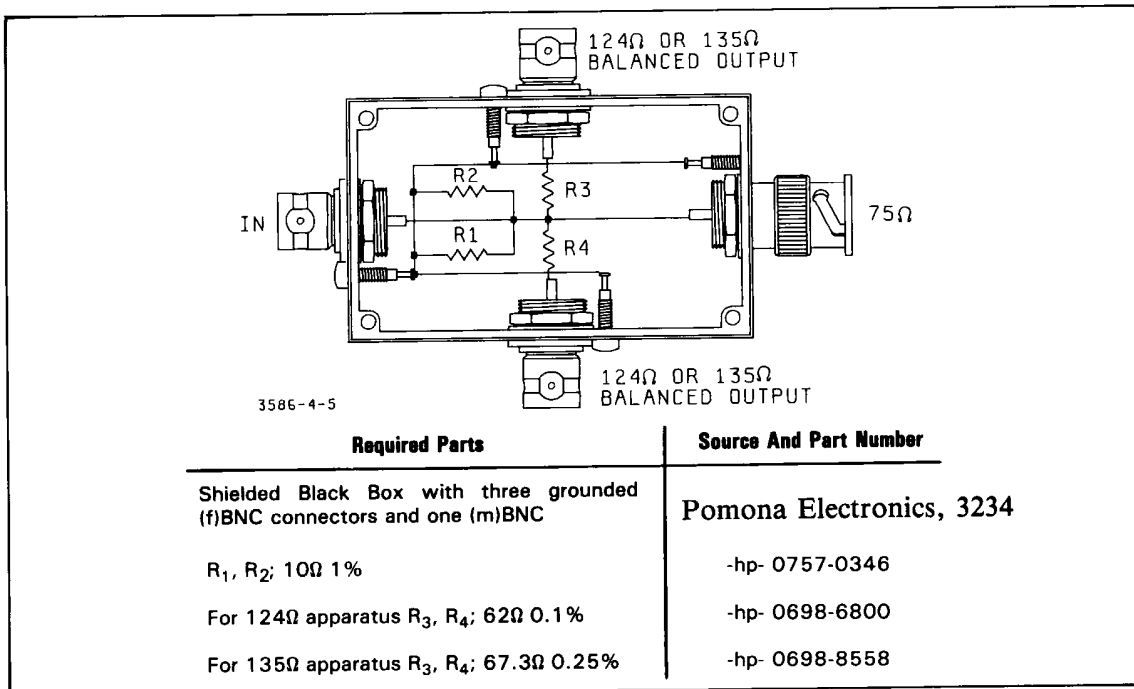


Figure 4-5. 124Ω and 135Ω Balance Testing Apparatus.

j. Press  , and turn the OFFSET on. Disconnect the cable from the 75Ω input. Select the 150Ω input.

The level reading on the 3586A should be less than or equal to -36dBm0.

k. Repeat steps i and j for a frequency of 1MHz.

NOTE

The remaining steps apply to the Model -hp- 3586B only.

l. Plug the male BNC of the 124Ω balance testing apparatus into the female BNC receptacle of the adapter in the 75Ω input of the -hp- 3586B.

m. Connect the 75Ω output of the Synthesizer/Level Generator to the input of the 124Ω testing apparatus using a 75Ω cable.

n. Connect each output of the testing apparatus to one side of the 124Ω balanced input using a 75Ω BNC coaxial cable and the appropriate adapter shown in Table 4-3.

NOTE

It is of extreme importance to the accuracy of this test to use cables of matched length for the 124 ohm input during the 10MHz balance measurement. If possible, measure the capacitance of a group of cables and select the two with the closest capacitance measurements for use with the output of the balanced testing apparatus.

Table 4-3. 75Ω Input Adapters.

| Model | Adapter |
|--------------------------|--|
| 3586B without option 001 | Mini-WECO plug to (f)BNC (-hp- Part No. 1251-0556) |
| 3586B with option 001 | Large-WECO plug to (f)BNC (-hp- Part No. 1251-0591) |

o. Set the output of the Synthesizer/Level Generator to 10kHz at +10dBm. Tune the 3586B to 10kHz.

p. Select the 124Ω || 50pF input. Press  , and turn the OFFSET on.

q. Select the 124Ω input. Remove the 124Ω balance testing apparatus from the 75Ω input. The level reading should be less than or equal to -36dBm0.

r. Reverse the connectors to the 124 ohm input. The level reading should be less than or equal to -36dBm0. If this reading or the reading from step q is out of spec, and the readings differ by 2dB or more, change one or both of the 75 ohm cables going to the 124 ohm input and repeat steps o through r. This step assures that the instrument will not fail because of capacitance mismatch of the two 75 ohm cables coming from the balance testing apparatus.

s. Repeat steps o through r for a frequency of 10MHz.

t. Replace the 124Ω balance testing apparatus with the 135Ω balance testing apparatus. Unplug the two cables from the 124Ω input and plug them into the 135Ω input using the 1/4" phone plug to (f)BNC adapters (-hp- Part No. 1251-3759).

u. Repeat steps o through q using frequencies of 10kHz and 1MHz, and the 135Ω input.

4-21. * Amplitude Accuracy.

4-22. The purpose of this test is to check the amplitude accuracy of the 3586A/B/C within its specified limits. The first step of the procedure involves the construction of precision matching pads for use with the balanced inputs. The remaining steps comprise the actual test procedure. Fundamentally, the test consists of measuring the power level of the "test signal" at 1kHz using an -hp- 3455A voltmeter, and measuring the dc output of a thermal converter which has the *same* "test signal" as an input. The test signal frequency is then varied in steps and its amplitude adjusted (and recorded) at each step such that the dc output of the thermal converter remains constant. Thus, a sufficiently flat "test signal" can be produced at certain frequencies and used to check the amplitude accuracy of the 3586A/B/C. At each frequency, the amplitude can be attenuated (with known accuracy) and measured by the 3586A/B/C to check its accuracy at different levels. To check the amplitude accuracy at higher levels, a +27dB amplifier is added.

NOTE

If the 3586A/B/C is meeting its Return Loss specification, the technician may choose to follow only those procedures for testing the amplitude accuracy at the 75Ω input. If the instrument is meeting its amplitude accuracy specification for the 75Ω input, the technician can be reasonably certain that the

other inputs (124Ω, 135Ω, 150Ω, 600Ω) are meeting their specification as well. Hence, further testing is probably not required.

Specifications: (10dB auto range, low distortion, after calibration)

75Ω, 50Ω

| | |
|---------------------|----------|
| - 80dBm to +20dBm | |
| 200Hz to 20kHz | ± 0.40dB |
| 20kHz to 18MHz | ± 0.20dB |
| 18MHz to 32.5MHz | ± 0.25dB |
| - 100dBm to - 80dBm | |
| 200Hz to 20kHz | ± 0.95dB |
| 20kHz to 32.5MHz | ± 0.75dB |

124Ω

| | |
|--------------------|----------|
| - 80dBm to +20dBm | |
| 4kHz to 10kHz | ± 0.60dB |
| 10kHz to 50kHz | ± 0.50dB |
| 50kHz to 5MHz | ± 0.35dB |
| 5MHz to 10MHz | ± 0.50dB |
| - 100dB to - 80dBm | |
| 10kHz to 50kHz | ± 1.00dB |
| 50kHz to 5MHz | ± 0.75dB |
| 5MHz to 10MHz | ± 1.00dB |

135Ω, 150Ω

| | |
|---------------------|----------|
| - 80dBm to +20dBm | |
| 50kHz to 1MHz | ± 0.35dB |
| 10kHz to 50kHz | ± 0.50dB |
| 4kHz to 10kHz | ± 0.60dB |
| - 100dBm to - 80dBm | |
| 50kHz to 1MHz | ± 0.75dB |
| 10kHz to 50kHz | ± 1.00dB |

600Ω

| | |
|---------------------|----------|
| 100Hz to 108kHz | |
| - 80dBm to +20dBm | ± 0.35dB |
| - 100dBm to - 80dBm | ± 0.75dB |

Equipment Required:

| | |
|---|------------------------|
| Synthesizer/Level Generator (with Cal sheet for attenuator) | -hp- 3335A(Special)K06 |
| Attenuator, with Cal sheet | -hp- 355D |
| 75Ω, .5 volt thermal converter, with cal sheet | -hp- 11051A opt. 003 |
| Digital Multimeter | -hp- 3455A |
| 50Ω/75Ω Minimum Loss Pad | -hp- 11852A (pad) |
| | 1250-1473 (adaptor) |
| | 1250-1536 (adaptor) |
| 50Ω, 1 volt thermal converter, with cal sheet | -hp- 11050A opt. 002 |
| 50Ω, 0.1% Resistor | 0699-0064 |

- 75Ω to Balanced Matching Pads (see step a and Figures 4-6a through 4-6d)
- Cables and Adapters (see Table 4-4)
- 50Ω Coaxial BNC Cable
- (3) — 50Ω Coaxial BNC Cables
- 15dB gain, + 27dBm output, .5MHz to 30MHz, RF amplifier
- 75Ω, .1% Resistor

- hp- 11170C
- hp- 11170A
- Q-Bit, QB-188-LH-BNC with supply and case
- hp- 0698-7363

NOTE

Keep cables as short as possible. The 20Hz Bandwidth should be selected throughout this test.

Procedure:

a. In Figures 4-6a through 4-6d are illustrated the 75Ω to balanced matching pads for testing the amplitude accuracy of the balanced inputs. Each consists of a shielded box with some configuration of BNC connectors and precision resistors. The value of each resistor in the pad is listed in the left column of the chart for each pad. The resistors must have a tolerance of ± 0.1%. The resistors are “built” by connecting the 1% resistor in parallel with the ten-turn potentiometer as indicated in the center column of each chart. After the resistors are soldered in place in the shielded box, each ten-turn pot should be adjusted so that the total resistance of the parallel combination is within the specified tolerance as shown in the right column of the chart. A four-wire resistance measurement should be used to monitor the resistance of each parallel combination while it is being adjusted within its tolerance. The values of the resistors should be checked periodically to ensure proper calibration of these precision matching pads.

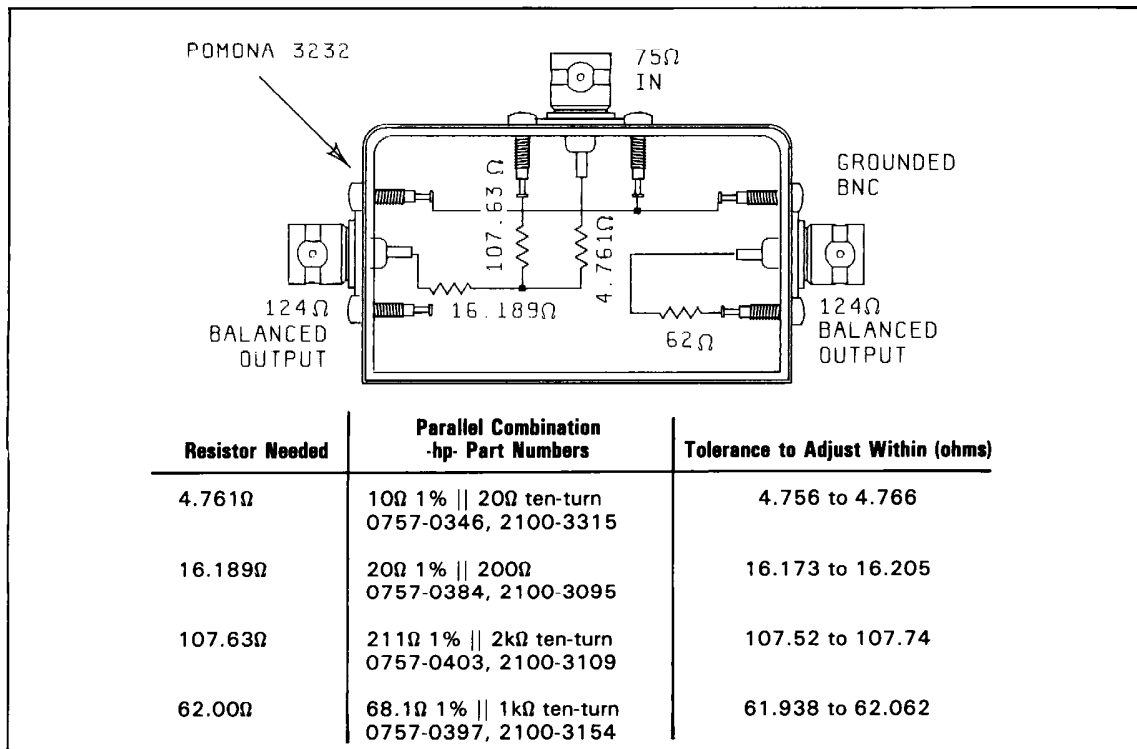


Figure 4-6a. 75Ω to 124Ω Matching Pad.

NOTE

See *-hp- 3455A Operating and Service Manual (-hp- Part No. 03455-90002), Section III, Paragraph 3-10 and Figure 3-2 for information on making four-wire resistance measurements.*

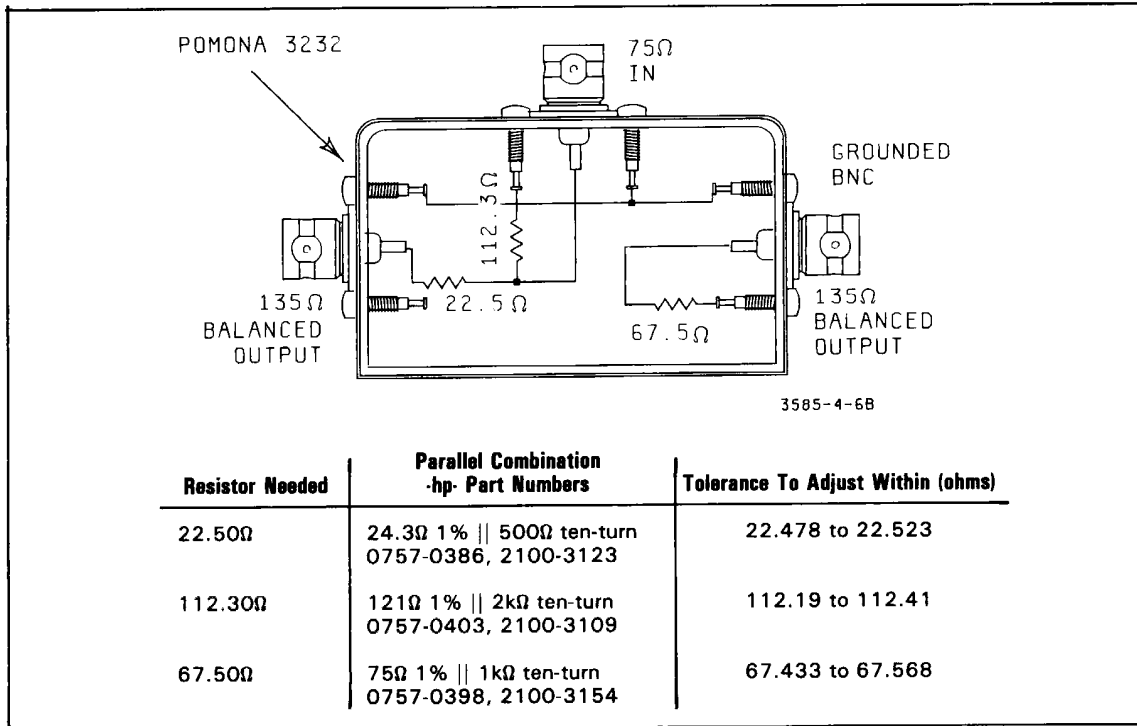


Figure 4-6b. 75Ω to 135Ω Matching Pad.

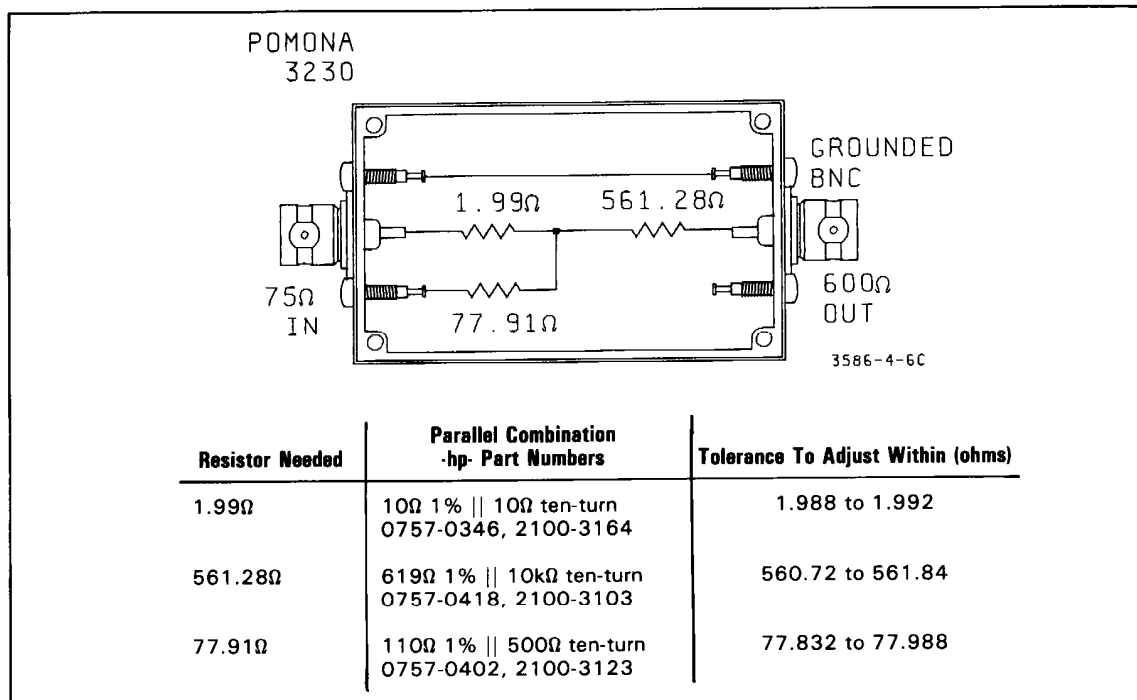


Figure 4-6c. 75Ω To 600Ω Matching Pad.

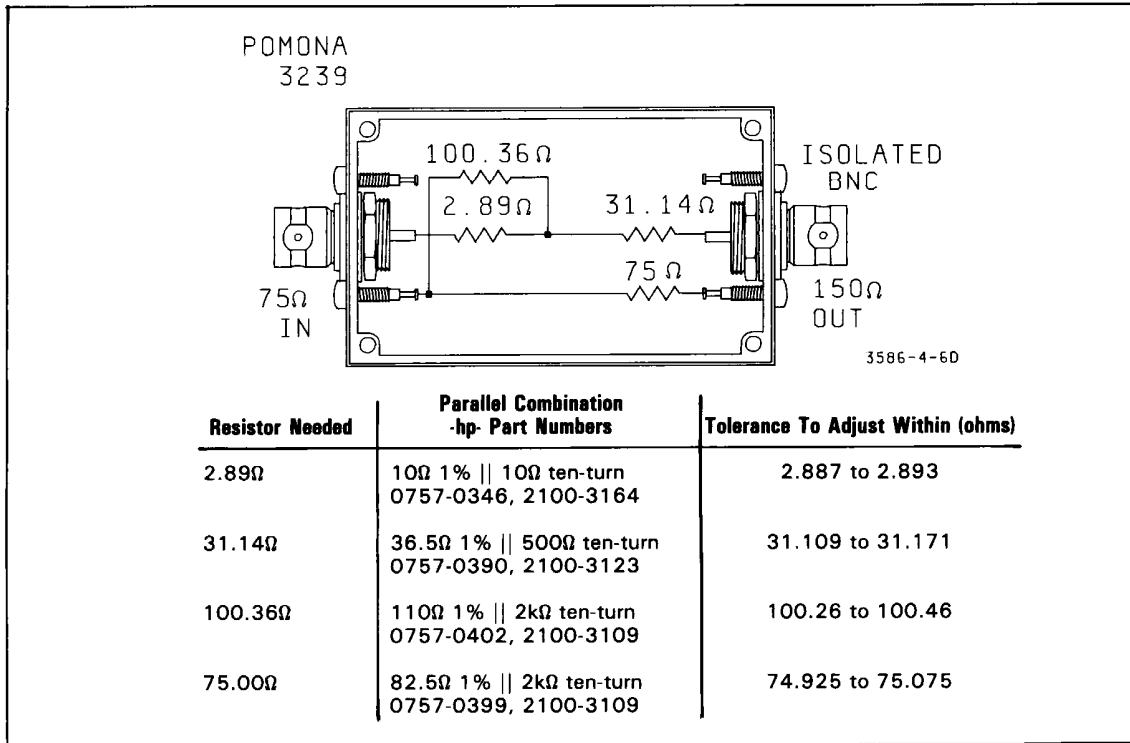


Figure 4-6d. 75Ω to 150Ω Matching Pad.

b. Connect the equipment as shown in Figure 4-6e. Set the -hp- 3335A output to 10.00dBm and 1kHz.

c. Measure the RMS voltage of the 1kHz test signal across 75Ω termination (-hp- Part No. 0698-7363) using the -hp- 3455A multimeter. The voltage should be about 0.45V RMS. Since this voltage is across a known load (75 ohms), the power dissipated can be precisely calculated using this formula:

$$P = 10 \log \frac{V^2}{.075} \quad (4-1)$$

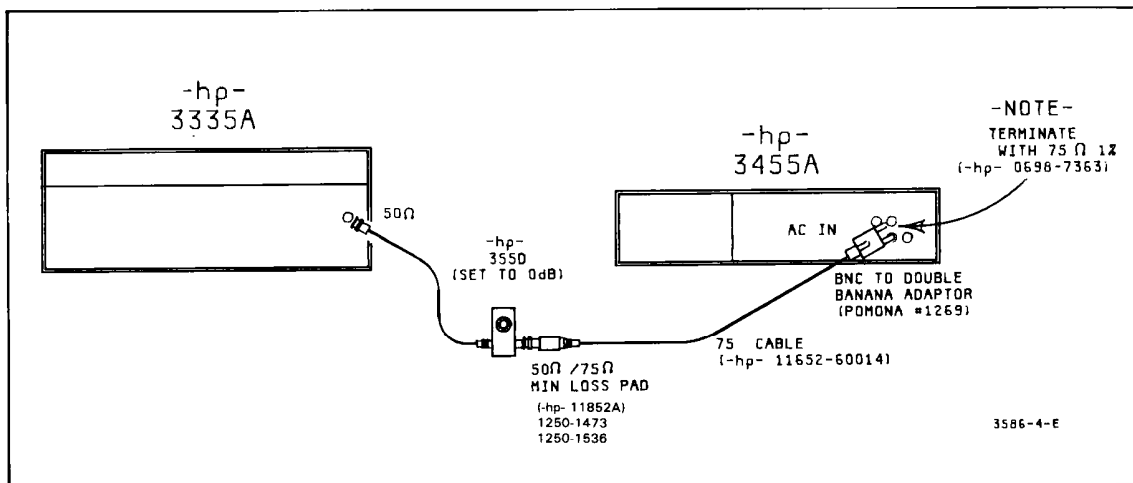


Figure 4-6e. Absolute AC-Power Measurement For 75Ω.

P is power in dBm and V is the measured ac RMS voltage across 75ohms. Use this formula to calculate power to three decimal places. Record the calculated power (space is provided in the Test Record for convenience).

d. Set up the equipment as shown in Figure 4-6f.

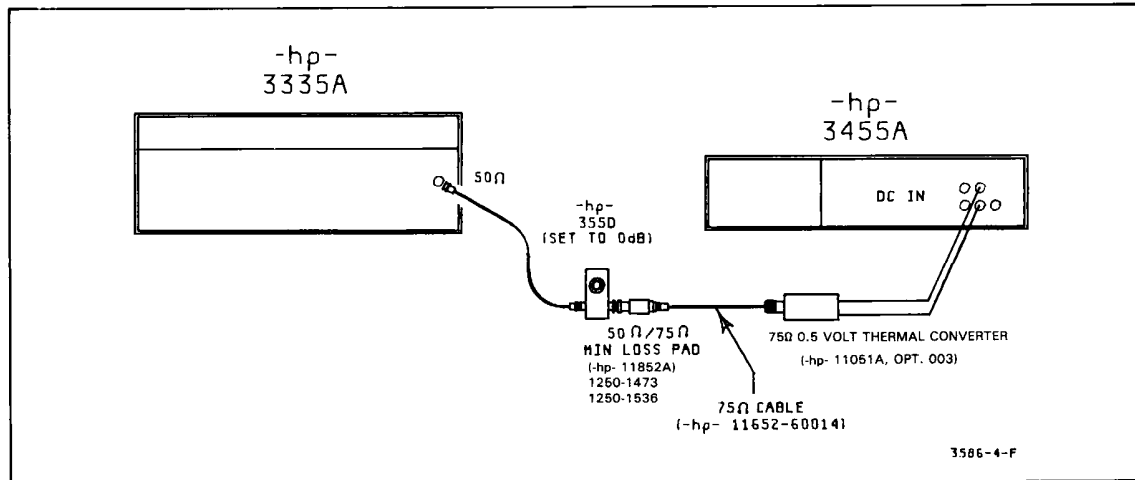


Figure 4-6f. Flatness Measurement For 75Ω.

e. Measure the dc output of the thermal converter (-hp- 11051A option 003) to microvolt resolution with the -hp- 3455A Multimeter. Record this voltage (V_{th}) in the Test Record.

f. Change the frequency of the -hp- 3335A to 1MHz. Increment or decrement the amplitude of the -hp- 3335A by 0.01dB until the dc output of the thermal converter is as close as possible to V_{th}. Record the level setting of the -hp- 3335A in the Test Record, column 2, for 1MHz.

g. Repeat step f for the remaining frequencies shown in column 1: 3MHz, 10MHz, and 30MHz.

h. The thermal converter calibration report can be used to eliminate the error caused by any non-linear responses of the thermal converter. The calibration report indicates % Error for various frequencies. This percentage corresponds to the percent increase or decrease of the input voltage referenced to 1kHz required to produce a constant dc output at other frequencies. A positive percentage means an increase is required; a negative percentage means a decrease is required. The % Error of voltage must be converted to dB error; the following formula is useful for this:

$$\text{Thermal Converter Error (dB)} = 20 \log \left(\frac{\% \text{ Error}}{100} + 1 \right) \quad (4-2)$$

Calculate the dB error (from the % Error on the calibration report) at 1MHz, 3MHz, 10MHz, and 30MHz. Record the dB errors in column 3 in the Test Record.

i. The numbers in column 3 represent a portion (due to thermal converter unflatness) of the amplitude increase needed to keep the thermal converter output constant. Because of this, these errors need to be subtracted from the numbers in column 2, and written in column 4. Column 4 shows the levels at which the -hp- 3335A produces a flat (± 0.04 dB) test signal

from the 75 ohm coaxial cable. Subtract the numbers in column 3 from the numbers in column 2 and record the results in column 4. Power P (from step c) can now be produced at various frequencies by setting the -hp- 3335A to the levels listed in column 4.

j. Set up the equipment as shown in Figure 4-6g. Tune the -hp- 3335A to 1kHz at 10dBm. On the -hp- 3335A, set the amplitude increment to 2.00dB. Initialize the -hp- 3586A/B/C by pressing RECALL, 0. Select the 20Hz Bandwidth. Select the 75 Ω input.

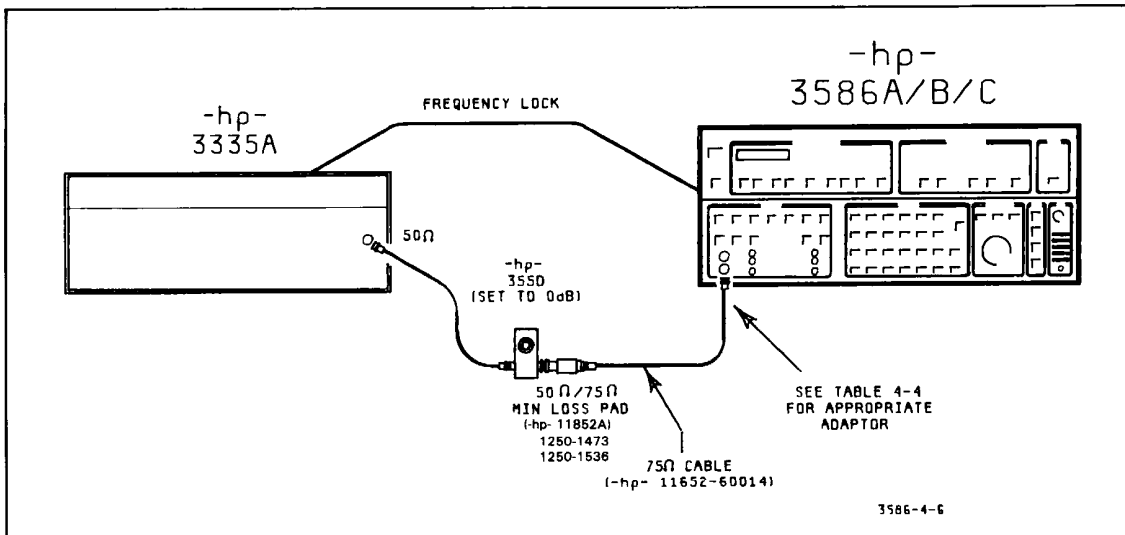


Figure 4-6g. Amplitude Accuracy Measurement For 75 Ω .

NOTE

The amplitude limits that the -hp- 3586A/B/C must measure within are a function of the following:

1. *Power P (the known power level of the test signal).*
2. *The error of the attenuator step that is used during thermal converter measurement.*
3. *The specification for the -hp- 3586A/B/C.*
4. *The attenuator step being used and its associated error.*
5. *The accuracy to which the test signal is known (0.04dB).*

Power P is used to calculate another power level i.e., the power that would be produced if no attenuator steps were switched on in the -hp- 3335A during thermal converter measurements. These power levels are represented in the Test Record as P with a frequency subscript; they are then used in calculating the test limits. The formulae for calculating these subscripted power levels are found in the Test Record.

The actual test limits are calculated as follows:

$$P_{xxxHz} - (\text{spec} - 0.04\text{dB})\text{-attenuator step(dB)-step error(dB)} \leq$$

$$\text{-hp- 3586A/B/C level reading} \leq$$

$$P_{xxxHz} + (\text{spec} - 0.04\text{dB})\text{-attenuator step(dB)-step error(dB)}$$

Combined in the Test Record are: the specifications, the accuracy of the test signal (0.04dB), and the attenuator step. The step error for each attenuator step in the Test Record must be filled-in according to the results in the calibration report for the -hp- 3335A attenuator.

k. Tune the -hp- 3586A/B/C to 1kHz and measure the level of the test signal. The first reading should be recorded in the top space of the Test Record for 75 ohms, 1kHz. Note that this reading corresponds to the -hp- 3335A's attenuator being set to its 2dB step. Level readings should be made for the remaining attenuator steps in the Test Record for 75 ohms, 1kHz. To make the next level reading, simply decrement the output of the -hp- 3335A by exactly 2.00dB using the decrement (down arrow) key. Repeat this process of decrementing the level of the test signal by appropriate amounts until all the levels in the Test Record for 75 ohms, 1kHz have been measured. To complete the last measurement in this list, as well as some to follow, it will be necessary to insert 40dB of attenuation using the -hp- 355D. (Whenever using the 355D attenuator, be sure to subtract its calibration error from the test limits in the Test Record.)

NOTE

It is of extreme importance to the accuracy of this performance test to deviate from the levels in column 4 by exactly 2.00dB steps when making level measurements. The unflatness of the -hp- 3335A has been accounted for by the use of a thermal converter in steps c through i. If the level of the -hp- 3335A is changed in steps of other than 2.00dB, then an error due to unflatness will be introduced into the test signal. If the level of the -hp- 3335A is changed only in 2.00dB steps, then the only error introduced will be from attenuator error; this error is compensated for by including attenuator step errors in the test limits for each level measurement.

l. Each test limit must be calculated using power P, and the -hp- 3335A attenuator step error for each step. The signed step error for each attenuation and frequency required is shown on the calibration report for the -hp- 3335A attenuator (special option K06). Space is provided in the test record to insert the step errors that correspond to the proper attenuator steps. P, as well as the 2dB step error at 1kHz, is used to calculate $P_{1\text{kHz}}$. Calculate all of the test limits.

m. Make sure all the readings (from step k) are within their specified test limits as indicated in the Test Record.

n. Tune the -hp- 3335A to 1MHz and set the amplitude to the level shown for 1MHz in column 4 of the Test Record.

o. Repeat steps k through m for 75 ohms 1MHz.

- p. Repeat step n for 3MHz.
- q. Repeat steps k through m for 75 ohms 3MHz.
- r. Repeat step n for 10MHz.
- s. Repeat steps k through m for 75 ohms 10MHz.
- t. Repeat step n for 30MHz.
- u. Repeat steps k through m for 75 ohms, 30MHz.

v. Select the 600 ohm input. Unplug the 75Ω coaxial BNC cable from the 75 ohm coaxial BNC cable from the 75 ohm input of the -hp- 3586A/B/C; connect it to the 75 ohm input of the 75 ohm to 600 ohm matching pad (Figure 4-6c). Connect the 600 ohm side of the matching pad to the 600 ohm input of the -hp-3586A/B/C using an appropriate cable or adapter as shown in Table 4-4.

Table 4-4. Amplitude Accuracy Test Cables.

| Model | 75Ω | 124Ω | 135Ω or 150Ω | 600Ω |
|-------------|--|---|--|---|
| 3586A | 75ΩBNC Coaxial Cable (-hp- Part No. 11652-60014) | | | |
| 3586A w/001 | 75ΩBNC Coaxial Cable (-hp- Part No. 11652-60014), Siemens 1.6/5.6 to (f)BNC adapter (W&G Part No. S230) | | Cable with Siemens 3-prong and (m) BNC (W&G Part No. K164) | Cable with Siemens 3-prong and (m) BNC (W&G Part No. K164) |
| 3586B | 75ΩBNC Coaxial Cable (hp- Part No. 11652-60014), Mini-WECO plug to (f)BNC adapter (-hp- Part No. 1250-0556) | Two(2) 75ΩBNC Coaxial Cables (-hp- Part No. 11652-60012), two (2) Mini-WECO plug to (f)BNC adapters (-hp- Part No. 1250-0556) | | |
| 3586B 001 | 75ΩBNC Coaxial Cable (-hp- Part No. 11652-60014), large-WECO plug to (f)BNC adapters (-hp- Part No. 1250-0591) | Two(2) 75ΩBNC Coaxial Cables (-hp- Part No. 11652-60012), two(2) large - WECO plug to (f)BNC adapters (-hp- Part No. 1250-0591) | Two(2) 75ΩBNC Coaxial Cables (-hp- Part No. 11652-60012), two (2) 1/4" phone plug to (f)BNC adapters (-hp- Part No. 1251-3759) | WECO 310 plug to (f) BNC adapter (-hp- Part No. 1251-3757) (m) BNC to (m) BNC adapter. (-hp- Part No. 1250-1288) |
| 3586C | 75ΩBNC Coaxial Cable (-hp- Part No. 11652-60014) | | | Dual banana plug to (f)BNC adapter (-hp- Part No. 1251-2277) (m) BNC to (m) BNC adapter (-hp- Part No. 1250-1288) |

NOTE

The Siemens 3-prong to male BNC cable must be modified so that two conductors of the BNC plug correspond to the two balanced lines of the Siemens 3-prong plug; the balanced lines of the Siemens 3-prong are the 12mm spaced plugs. An optional cable assembly can consist of two single banana plugs at one end and a male BNC at the other end.

- w. Tune the -hp- 3335A to 1kHz, at 10.00dBm.
- x. Repeat steps k through m for 600 ohms, 1kHz.

NOTE

The testing for 600 ohms begins at -11dBm instead of +4dBm because of the 15.00dB loss of the 75 ohm to 600 ohm matching pad added to the system.

NOTE

Steps y through bb apply to the -hp- 3586A and -hp- 3586B only. For the -hp- 3586C, proceed with step ii.

y. Disconnect the 75 ohm coaxial BNC cable from the input to the 75 ohm to 600 ohm matching pad. Disconnect the cable or adapter from the 600 ohm input of the -hp- 3586A/B. Connect the 75 ohm cable to the input of the 75 ohm/150 ohm or 75 ohm/135 ohm matching pad (whichever is appropriate). See Figures 4-6b and 4-6d for illustrations of these pads. Connect the output (135 ohm or 150 ohm) of the matching pad to the appropriate input of the -hp- 3586A/B using the appropriate cables and adapters as shown in Table 4-4.

- z. Select the 135 ohm or 150 ohm input.
- aa. Tune the -hp- 3335A to 1MHz at the level shown in column 4 of the Test Record.
- bb. Repeat steps k through m for 135 ohm, or 150 ohm at 1MHz.

NOTE

Steps cc through hh apply to the -hp- 3586B only. For -hp- 3586A, proceed with step mm. For -hp- 3586C, proceed with step ii.

cc. Disconnect the 75 ohm coaxial BNC cable from the input to the 75 ohm to 135 ohm matching pad. Disconnect the cables and adapter from the 135 ohm input of the -hp- 3586B. Connect the 75 ohm cable to the input of the 75 ohm to 124 ohm matching pad (see Figure 4-6a). Connect the output of the matching pad to the 124 ohm input of the -hp- 3586B using appropriate cables and adapters as shown in Table 4-4.

- dd. Select the 124 ohm input.
- ee. The -hp- 3335A should be set to 1MHz and at the level shown in column 4 of the Test Record.
- ff. Repeat steps k through m for 124 ohm, 1MHz.
- gg. Repeat steps ee and ff for 3MHz.
- hh. Repeat steps ee and ff for 10MHz.

NOTE

Steps ii through ll apply to the -hp- 3586C only. For -hp- 3586A/B, proceed with step mm.

ii. Connect the equipment as shown in Figure 4-6h. Set the -hp- 3335A output to 1kHz at 12.50dBm. Repeat step c using the 50 ohm termination, making sure that the measured voltage is about 0.95V RMS, and calculating Pc using the following equation:

$$P_c = 10 \log \frac{V^2}{.050}$$

Record this power (Pc) in the space in the Test Record provided.

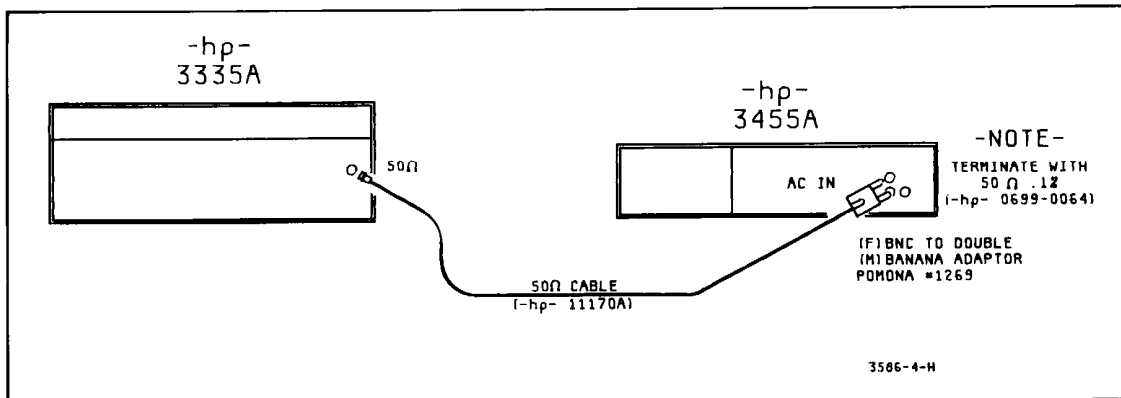


Figure 4-6h. Absolute AC Power Measurement For 50Ω.

jj. Set up the equipment as shown in Figure 4-6i. Repeat step e, using the 50 ohm thermal converter and recording voltage Vthc. Repeat step f, using Vthc and column 2c. Repeat step g for column 1c. Repeat step h, recording the dB errors in column 3c. Repeat step i for columns 1c, 2c, 3c, and 4c. Power Pc (from step ii) can now be produced at various frequencies by setting the -hp- 3335A to the levels listed in column 4c.

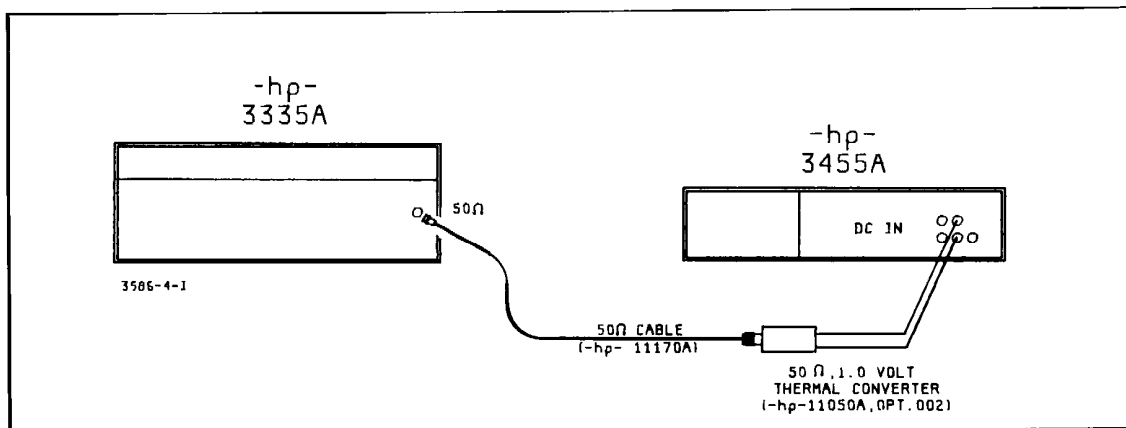


Figure 4-6i. Flatness Measurement For 50Ω.

kk. Set up the equipment as shown in Figure 4-6j. Tune the -hp- 3335A to 1kHz at the level indicated in column 4c for 1kHz. Tune the -hp- 3586C to 1kHz. The level reading should be within (or equal to) the specified test limits as indicated in Test Record. Record the level reading.

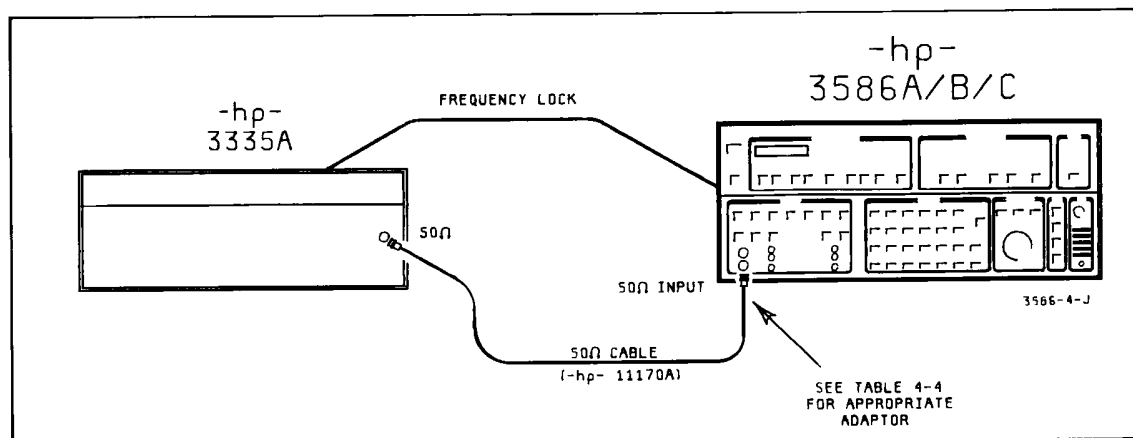


Figure 4-6j. Amplitude Accuracy Measurement For 50Ω.

ll. Repeat the measurement made in step kk for the remaining frequencies in column 1c. This concludes the testing of the 50 ohm input for the -hp- 3586C.

mm. Set up the equipment as shown in Figure 4-6f with the exception of inserting a power amplifier (Q-Bit model number QB-188-LH, with case and power supply) between the -hp- 3335A and 50 ohm/75ohm Minimum Loss Pad. Before turning on the power of the amplifier, *MAKE CERTAIN* that the -hp- 3335A is set to a level of -6.00dBm .

CAUTION

Permanent damage to the thermal converter may occur if its input voltage exceeds 0.5 volts RMS. The -hp- 3335A must be set to -6.00dBm in order for the output of the 50 ohm/75 ohm Minimum Loss Pad to be no greater than $+4\text{dBm}$ (worst case); this corresponds to about 0.45 volts RMS.

nn. Tune the -hp- 3335A to 1MHz. Monitor the dc voltage (to microvolt resolution) from the thermal converter output using the -hp- 3455A. Adjust the output of the -hp- 3335A until the dc voltage is as close as possible to V_{th} . Record the amplitude of the -hp- 3335A in column 6. If the output of the -hp- 3335A exceeds -4.99dBm during this adjustment, subtract 2dB from the attenuator steps in the test records for 1MHz, $+4\text{dBm}$ to $+20\text{dBm}$, and change the equation for $P_{1\text{MHz}}$ to read as follows:

$$P_{1\text{MHz}} = P + 18\text{dB} + (16\text{dB step error for 1MHz})$$

oo. Repeat step nn for the remaining frequencies in column 5: 3MHz, 10MHz, and 30MHz.

pp. As before, use equation 4-2 to calculate the dB error (given % error) of the thermal converter at the various frequencies. Record them in column 7.

qq. Subtract the entries in column 7 from the entries in column 6; record the results in column 8. This column represents the amplitudes the -hp- 3335A must be set at to produce a flat test signal (given the present equipment arrangement).

rr. Set up the equipment as shown in Figure 4-6g with the exception mentioned in step mm, i.e., leave the amplifier connected between the -hp- 3335A and the Minimum Loss Pad.

ss. Tune the -hp- 3335A and the -hp- 3586A/B/C to 1MHz. Set the level of the -hp-3335A to the level in column 8 corresponding to 1MHz. Record the level reading of the -hp-3586A/B/C.

tt. Repeat step ss for the remaining attenuator steps shown in the Test Record for 75 ohm, 1MHz, +4dBm to +20dBm. Refer to step k and the note following it when adjusting the level of the -hp- 3335A - always use *ONLY* 2dB deviations from the levels listed in column 8.

uu. Repeat steps ss and tt for frequencies of 3MHz, 10MHz and 30MHz.

vv. The total step errors of the -hp- 3335A attenuator, as well as power P, must be used when calculating the test limits as described previously in step 1. Make sure the level readings are within their specified test limits. This concludes the amplitude accuracy testing for the 75 ohm input.

NOTE

The following steps apply to the -hp- 3586A and the -hp-3586B only.

ww. Disconnect the 75 ohm cable from the 75 ohm input of the -hp- 3586A/B and connect it to the input of the 75 ohm-to-135 ohm or 75 ohm-to-150 ohm matching pad, whichever is appropriate. Use the cables in Table 4-4. Select the corresponding input.

xx. Repeat steps ss and tt for the 135 ohm or 150 ohm input. Repeat step vv for the 135 ohm or 150 ohm input.

NOTE

The following steps apply to the -hp- 3586B only.

zz. Replace the 135 ohm matching pad with the 124 ohm matching pad and connect it to the 124 ohm input of the -hp- 3586B using the cables in Table 4-4. Select the 124 ohm input.

aaa. Repeat steps ss and tt for the 124 ohm input, at 1MHz, 3MHz and 10MHz.

bbb. Repeat step vv for the 124 ohm input.

4-23. Half-Power Bandwidths (-3dB).

4-24. This test verifies the half-power bandwidths of all the IF filters in the 3586A/B/C/

Specifications:

- 3dB Bandwidths (all filters) $\pm 10\%$

Procedure:

a. Initialize the 3586A/B/C by pressing










- b. Turn off the  .
- c. Initialize the internal 1MHz oscillator by pressing  ,  ,  ,  .
- d. Press  and turn the  on.
- e. Tune the frequency above and below 1MHz to find the frequencies at which the level reads -3dBm0.
- f. The difference of these two frequencies is the half-power bandwidth of the bandwidth selected. The half-power bandwidth should be within ±10% of the value of the selected bandwidth.
- g. Repeat steps a-f with the remaining selectable bandwidths. Table 4-5 shows the selectable bandwidths for the 3586A/B/C.

Table 4-5. 3586A/B/C Selectable Bandwidths.

| Instrument | Selectable Bandwidths |
|------------|---|
| 3586A | 20Hz, 400Hz, 1740Hz (3100Hz replaces 1740Hz in Option 003) |
| 3586B | 20Hz, 400Hz, 2000Hz (1740Hz replaces 2000Hz in Option 002) (3100Hz replaces 2000Hz in Option 003) |
| 3586C | 20Hz, 400Hz, 3100Hz |




4-25. Pass-Band Flatness.

4-26. This test checks the flatness of the IF filters to within a specified frequency range.

Specifications:

| Pass Band Flatness (±0.3dB) | Minimum Range From Center Frequency |
|-----------------------------|-------------------------------------|
| 3100Hz | - 1000Hz to 1000Hz |
| 2000Hz | - 650Hz to 650Hz |
| 1740Hz | - 550Hz to 550Hz |
| 400Hz | - 50Hz to 50Hz |
| 20Hz | - 3Hz to 3Hz |

Procedure:

- a. Initialize the instrument by pressing  ,  .
- b. Turn off the  .

c. Initialize the 1MHz source by

pressing **RECALL** , **.** , **CNTR→
FREQ** , **7** .

d. Press **RDNG→
OFFSET** , and turn on the OFFSET.

e. Slowly tune the frequency above and below 1MHz to the first frequencies at which the level reading reaches +0.30dBm0 or -0.30dBm0.

f. Subtract 1MHz from each of the two frequencies. These two numbers represent the range at which the selected bandwidth is flat to within 0.30dB. Make sure this range meets or exceeds the specified minimum range for the selected bandwidth (see specifications).

g. Repeat Steps a-f for the remaining bandwidths.

4-27. 400Hz Filter Shape.

4-28. This test checks the 60dB bandwidth of the 400Hz filter.

Specifications:

| 400Hz Bandwidths | Maximum Range |
|------------------|--------------------|
| 60dBm0 Rejection | - 1100Hz to 1100Hz |

Procedure:

a. Initialize the 3586A/B/C by pressing **RECALL** , **0** .

b. Turn off the **AUTO CAL** **.**

c. Initialize the 1MHz internal source by

pressing **RECALL** , **.** , **CNTR→
FREQ** , **7** .

d. Press **RDNG→
OFFSET** , and turn on the OFFSET.

e. Select the 400Hz Bandwidth.

f. Tune the frequency above and below 1MHz to find the two frequencies at which the level reading becomes - 60dBm0.

g. Subtract 1MHz from each of these frequencies. These two numbers represent the range for 60dB of rejection for the 400Hz bandwidth. Make sure these numbers are equal to or within the maximum specified range (see specifications).



4-29. Pilot (20Hz) Filter Bandwidths.

4-30. This test verifies the 30dB and 60dB bandwidths of the 20Hz IF filter.

Specifications:

| <u>Pilot Filter (20Hz) Shape</u> | <u>Maximum Range</u> |
|----------------------------------|----------------------|
| 30dBm0 Rejection | - 45Hz to 45Hz |
| 60dBm0 Rejection | - 90Hz to 90Hz |

Procedure:

- a. Initialize the 3586A/B/C by pressing **RECALL** , **0** .
- b. Turn off the **AUTO CAL**  .
- c. Initialize the 1MHz internal source by pressing **RECALL** , **.** , **CNTR → FREQ** , **7** .
- d. Press **RDNG → OFFSET** and turn on the **OFFSET**  .
- e. Select the 20Hz bandwidth.
- f. Tune the frequency above and below 1MHz to the two frequencies where the level reads - 30dBm0.
- g. Subtract 1MHz from these two frequencies. These two numbers represent the maximum allowable range for 30dB of rejection for the 20Hz filter.
- h. Make sure these numbers are equal to or within the maximum specified range (see specifications).
- i. Repeat steps f and g for 60dB of rejection.

4-31. Carrier Frequency Rejection.

4-32. This test verifies the carrier frequency rejection of the 3100Hz, 2000Hz or 1740Hz IF filter.

Specifications:

Carrier Rejection

| | |
|-------------------|--------|
| 3100Hz (± 1850Hz) | – 60dB |
| 2000Hz (± 1500Hz) | – 60dB |
| 1740Hz (± 1350Hz) | – 60dB |

Equipment Required:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 75Ω BNC Coaxial Cables | -hp- Part No. 11652-60014 |
| Adapter (See Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:





- a. Initialize the 3586A/B/C by pressing  ,  .
- b. Connect the 10MHz output from the rear panel of the 3586A/B/C to the Reference Input of the Synthesizer/Level Generator using a 75Ω cable.
- c. Connect the 50Ω side of the Minimum Loss Pad to the 50Ω output of the Synthesizer/Level Generator. Connect the 75Ω side of the Minimum Loss Pad to the 75Ω input of the 3586A/B/C using a 75Ω cable.
- d. Set the output of the Synthesizer/Level Generator to 1MHz at 0dBm.
- e. Press  and turn the  on.
- f. Select the widest bandwidth for the 3586A/B/C.
- g. Enter a frequency step in accordance with Table 4-6. This step will depend upon what model is being tested (see Table 4-5).

Table 4-6. Carrier Rejection Test Step Frequencies.

| Bandwidth | Step Frequency |
|-----------|----------------|
| 3100Hz | 1850Hz |
| 2000Hz | 1500Hz |
| 1740Hz | 1350Hz |

h. Step the frequency one step above and below 1MHz and make sure the average level reading is – 60dBm0 or lower for each of these two frequencies. This tests the Carrier Frequency Rejection.

4-33. Adjacent Channel Rejection.

4-34. This test verifies the adjacent channel rejection of the 3100Hz, 2000Hz, or 1740Hz IF filter.

Specifications:

Adjacent Channel Rejection

| | |
|-------------------|----------|
| 3100Hz (± 2850Hz) | - 75dBm0 |
| 2000Hz (± 2500Hz) | - 75dBm0 |
| 1740Hz (± 2350Hz) | - 75dBm0 |

Equipment Required:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 75Ω Coaxial BNC cables | -hp- Part No. 11652-60014 |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:

- a. Connect the 3586A/B/C and the Synthesizer/Level Generator as described in the Carrier Frequency Rejection performance test.
- b. Initialize the 3586A/B/C by pressing **RECALL** , **0** .
- c. Set the output of the Synthesizer/Level Generator to 1MHz at 0dBm.
- d. Press **RDNG→**
OFFSET and turn the **OFFSET** knob on.
- e. Select the widest bandwidth on the 3586A/B/C.
- f. Enter a step frequency in accordance to Table 4-7. This step will depend upon what model is being tested (see Table 4-5).

Table 4-7. Adjacent Channel Rejection Test Step Frequencies.

| Bandwidth | Step Frequency |
|-----------|----------------|
| 3100Hz | 2850Hz |
| 2000Hz | 2500Hz |
| 1740Hz | 2350Hz |

- g. Step the frequency one step above and below 1MHz and make sure the average level reading is - 75dBm0 or lower for each of these two frequencies. This tests the Adjacent Channel Rejection.

4-35. * Residual Noise.

4-36. This performance test verifies the noise level of the inputs of the 3586A/B/C to be within their specified limits.

NOTE

The technician may choose to limit the noise level testing to only the 75Ω input. If the 3586A/B/C is meeting its noise floor specification at this input, the technician can be reasonably certain that the other inputs (124Ω, 135Ω, 150Ω, 600Ω) are meeting their specification as well. Hence, further testing is probably not required.

Specifications:

NOTE

The noise floor for the 3586C is not specified for its 50Ω input.

| | |
|--|-------------------------------------|
| 75Ω, 100kHz to 32.5MHz 1740Hz, 200Hz, or 3100Hz Bandwidth | – 116dB (– 114dBm for the 3586C) |
| 400Hz, 20Hz Bandwidth | – 120dBm |
| 75Ω, 600Ω, 2kHz to 100kHz all Bandwidths | – 105dBm |
| 124Ω, 100kHz to 10MHz 1740Hz, 2000Hz, or 3100Hz Bandwidths 400Hz, 20Hz Bandwidths | – 116dBm – 120dBm |
| 135Ω, 150Ω, 100kHz to 1MHz 1740Hz, 2000Hz, or 3100Hz Bandwidths 400Hz, 20Hz Bandwidths | – 116dBm – 120dBm |
| 124Ω, 135Ω, 150Ω, 10kHz to 100kHz all Bandwidths | – 105dB |

Procedure:

- a. Initialize the 3586A/B/C by pressing RECALL , 0 . Select the 75Ω input.
- b. Enter a frequency of 32.495MHz. The level reading should be no greater than – 116dBm (– 114dBm for a 3586C).
- c. Select the 400Hz and 20Hz Bandwidths. The level reading at each of these Bandwidths should be no greater than – 120dBm.
- d. (Model -hp- 3586B only.) Enter a frequency of 9.995MHz. Select the 124Ω input. Select the widest Bandwidth. The level should be no greater than – 116dBm.

- e. Repeat step c.
- f. (Models -hp- 3586A and -hp- 3586B only.) Enter a frequency of 0.995MHz. Select the 135Ω or 150Ω input. Select the widest Bandwidth. The level should be no greater than -116dBm.
- g. Repeat step c.
- h. Enter a frequency of 8.01kHz. Select the 75Ω input. Select the widest Bandwidth. The level should be no greater than -105dBm.
- i. Repeat step h for the 400Hz and 20Hz Bandwidths.
- j. Repeat steps h and i for the 124Ω, 135Ω, 150Ω, and 600Ω inputs.

4-37. Residual Spurious Responses.

4-38. This test checks the level of residual spurs that may be generated by signals of various frequencies found in the 3586A/B/C.

Specifications:

- Spurs 350Hz and above ≤ -115dBm (-110dBm for a 3586C)
- Spurs below 350Hz ≤ -100dBm (-95dBm for a 3586C)

Procedure:

- a. Initialize the 3586A/B/C by pressing **RECALL** , **0** .
- b. Select the 20Hz Bandwidth. Select the 75Ω input.
- c. Tune the 3586A/B/C to the frequencies shown in Table 4-8a. The level reading should be less than or equal to -115dBm at each frequency.

Table 4-8a. Residual Spurs 350Hz and Above.

| Frequencies To Check for Spurs | |
|--------------------------------|---|
| If using 60Hz AC power sources | 360Hz 420Hz |
| If using 50Hz AC power sources | 350Hz 400Hz |
| All instruments | 100kHz 200kHz 300kHz 400kHz 10MHz 20MHz 30MHz |

d. Tune the 3586A/B/C to the frequencies shown in Table 4-8b. The level reading should be less than or equal to -100dBm at each frequency.

Table 4-8b. Residual Spurs Below 350Hz.

| | Frequencies To Check for Spurs |
|--------------------------------|--------------------------------|
| If using 60Hz AC power sources | 60Hz |
| | 120Hz |
| | 180Hz |
| | 240Hz |
| | 300Hz |
| If using 50Hz AC power sources | 50Hz |
| | 100Hz |
| | 250Hz |
| | 200Hz |
| | 250Hz |
| | 300Hz |

4-39. Spurious Responses With Input.

4-40. The purpose of this test is to check that spurious responses, from various causes, which could be present with certain input signals, are below their specified limits.

Specifications:

db Below Full Scale Carrier

| | |
|------------------------------------|-----------------|
| Input images (100-132MHz) | -80dBc |
| IF (49.968750MHz) | -80dBc |
| Non-Harmonic ($> 1600\text{Hz}$) | -80dBc |
| (300Hz-1600Hz) | -75dBc |

Equipment Needed:

| | |
|-----------------------------|---------------------------|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 75Ω BNC Coaxial Cables | -hp- Part No. 11652-60014 |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) |
| | 1250-1473 (adaptor) |
| | 1250-1536 (adaptor) |
| Frequency Doubler | -hp- 10515A |
| Adapter (see Table 4-1) | |



Procedure:

NOTE

The following group of steps tests for Input Images. The output frequency of the 3335A is doubled; this provides the image frequencies. The 3586A/B/C is then tuned to the image frequency minus 100MHz.


a. Connect the 10MHz (reference) output of the 3586A/B/C to the reference input of the 3335A. Connect the 50Ω side of the Minimum Loss Pad to the 50Ω output of the 3335A. Connect the frequency doubler to the 75Ω side of the pad and the output of the frequency doubler to the 75Ω input of the 3586A/B/C. Use an adaptor as indicated in Table 4-1.

b. Initialize the 3586A/B/C by pressing **RECALL** , **0** . Select 75Ω termination.

- c. Set the output of the 3335A to 15MHz at a level of +10dBm.
- d. Tune the 3586A/B/C to 30MHz; select the 20Hz bandwidth.
- e. Press  . Turn the  ON.
- f. Set the frequency of the 3335A to 50.5MHz.
- g. Tune the 3586A/B/C to 1MHz. The level reading should be less than or equal to –80dBm0 (this number includes the error of the frequency doubler).
- h. Set the frequency of the 3335A to 65MHz.
- i. Tune the 3586A/B/C to 30MHz. The level reading should be less than or equal to –80dBm0.

NOTE

The following group of steps tests for IF images.

- j. Disconnect the frequency doubler from the pad and connect the 75Ω side of the pad to the 75Ω input of the 3586A/B/C using a 75Ω cable.
- k. Set the output of the 3335A to 1.03125MHz at a level of 5.7dBm.
- l. Turn off the  .
- m. Tune the 3586A/B/C to 1MHz. The level reading should be less than or equal to –80dBm.
- n. Set the frequency of the 3335A to 30.03125MHz.
- o. Tune the 3586A/B/C to 30MHz. The level reading should be less than or equal to –80dBm.
- p. Set the frequency of the 3335A to 32001350Hz.
- q. Tune the 3586A/B/C to 31999850Hz. The level reading should be less than or equal to –75dBm.
- r. Set the frequency of the 3335A to 32090000.1Hz.
- s. Tune the 3586A/B/C to 31990000.1Hz. The level reading should be less than or equal to –80dBm.

4-41. * Harmonic Distortion.

4-42. This test assures that the second and third order harmonic distortion is within its specified limits.

NOTE

The technician may choose to limit the harmonic distortion test to only the 75Ω input. If the 3586A/B/C is meeting its harmonic distortion specification at this input, the technician can be reasonably certain that the other inputs (124Ω, 135Ω, 150Ω, 600Ω) are meeting their specification as well. Hence, further testing is probably not required.

Specifications:

From Full Scale

| | |
|---|--------|
| 3586A/B, all inputs | – 70dB |
| 3586C, all inputs | – 75dB |
| >4kHz on 75Ω and 600Ω inputs, Low Dist Mode | |

Equipment Required:

| | |
|---|---|
| Synthesizer/Level Generator | -hp- 3335A |
| 100kHz low-pass, 48dB/octave filter, 75Ω input and output | Allen Avionics (custom made) |
| 10MHz low-pass, 48dB/octave filter, 75Ω input and output | Allen Avionics (custom made) |
| (1) 50Ω coaxial BNC cables | -hp- Part No. 11170A |
| (2) 75Ω coaxial BNC cables | -hp- Part No. 11652-60012 |
| 75Ω to 124Ω matching pad (3586B), see Figure 4-6 | |
| 75Ω to 135Ω matching pad (3486B), see Figure 4-6 | |
| 75Ω to 150Ω matching pad (3586A), see Figure 4-6 | |
| 75Ω to 600Ω matching pad, see Figure 4-6 | |
| Adapters and Cables (see Table 4-4) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

NOTE

The following steps test for Non-Harmonically related images.

Procedure:

- Connect the equipment as shown in Figure 4-7 using the 100kHz low-pass filter.
- Initialize the 3586A/B/C by pressing **RECALL** , **0** . Select the 75Ω input.
- Tune the frequency of the 3586A/B/C to 100kHz. Select the 100dB Range.

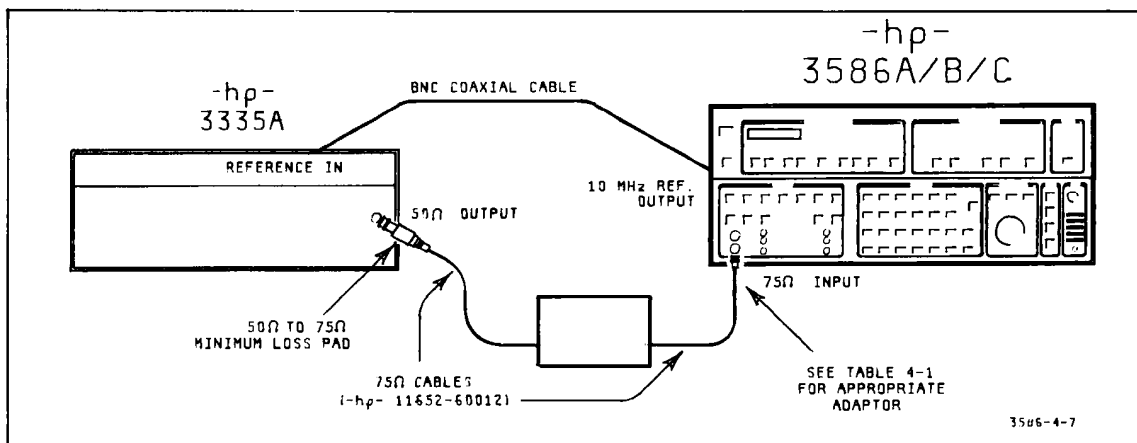



Figure 4-7. Harmonic Distortion Test Set-Up.

- d. Select the 20Hz Bandwidth. Select Entry mode. Enter OdBm full Scale.
- e. Set the output of the Synthesizer/Level Generator to 100kHz at a level such that the 3586A/B/C reads a level of 0dBm.
- f. Tune the 3586A/B/C to 200kHz. The level reading should be less than or equal to -70dBm (75dBm for a 3586C).
- g. Tune the 3586A/B/C to 300kHz. The level reading should be less than or equal to -70dBm (-75dBm for 3586C).
- h. Replace the 100kHz filter with the 10MHz low-pass filter.
- i. Tune the 3586A/B/C to 10MHz.
- j. Set the output of the Synthesizer/Level Generator to 10MHz at a level such that the 3586A/B/C reads a level of 0dBm.
- k. Tune the 3586A/B/C to 20MHz. The level reading should be less than or equal to -70dBm (-75dBm for a 3586C).
- l. Tune the 3586A/B/C to 30MHz. The level reading should be less than or equal to -70dBm (-75dBm for a 3586C).
- m. Disconnect the 75Ω BNC cable from the input of the 3586A/B/C and connect it to the input of the 75Ω unbalanced to 600Ω balanced matching pad. Connect the output of this pad to the 600Ω input of 3586A/B/C using a cable or adapter with the appropriate connectors shown in Table 4-4.
- n. Replace the 10MHz filter with the 100kHz low-pass filter.
- o. Tune the 3586A/B/C to 100kHz. Enter a -10dBm Full Scale.
- p. Set the output of the Synthesizer/Level Generator to 100kHz at a level such that the 3486 reads -10dBm.

Press , and turn the OFFSET on.


q. Tune the 3586A/B/C to 200kHz. The level reading should be less than or equal to -70dBm (-75dBm for a 3586C).

r. Tune the 3586A/B/C to 300kHz. The level reading should be less than or equal to -70dBm (-75dBm for a 3586C).



NOTE

The remaining steps apply to the 3586A and the 3586B only.

s. Disconnect the 75Ω cable from the 600Ω input of the 3586A/B/C and connect it to the 135Ω or 150Ω input using the appropriate Matching Pad and cable shown in Table 4-4.

t. Tune the 3586A/B to 100kHz. Turn  off.

u. Set the output of the Synthesizer/Level Generator to 100kHz at a level of such that the 3586 reads -10dBm.

Press  and turn the  on.

v. Tune the 3586A/B to 200kHz. The level reading should be less than or equal to -70dBm.

w. Tune the 3586A/B to 300kHz. The level reading should be less than or equal to -70dBm.

NOTE



The remaining steps apply to the 3586B only.

x. Replace the 100kHz filter with the 10MHz low-pass filter.

y. Replace the 75Ω to 135Ω pad with the 75Ω to 124Ω pad, using a cable with the appropriate adapters shown in Table 4-4.

aa. Tune the 3586B to 10MHz. Turn the OFFSET off.

bb. Set the output of the Synthesizer/Level Generator to 10MHz at a level such that the 3586 reads -10dBm.

Press  and turn the  on.

cc. Tune the 3586B to 20MHz. The level reading should be less than or equal to -70dBm.

dd. Tune the 3586B to 30MHz. The level reading should be less than or equal to -70dBm.

4-43. * Intermodulation Distortion.

4-44. The purpose of this test is to verify that the second and third order intermodulation distortion of the 3586A/B/C is within its specified limits. This is accomplished by combining two frequencies (f_1 and f_2), and measuring the level with the 3586A/B/C tuned to $f_1 - f_2$, $f_1 + f_2$, $2f_1 - f_2$, and $2f_2 - f_1$. Of course, only those frequencies which are possible to tune to are checked.

NOTE

The technician may choose to limit the intermodulation distortion testing to only the 75Ω input. If the 3586A/B/C is meeting its IM distortion specification at this input, the technician can be reasonably certain that the other inputs (124Ω, 135Ω, 150Ω, 600Ω) are meeting their specification as well. Hence, further testing is probably not required.

Specifications:

2nd and 3rd order, in band;

Separation 7kHz to 1MHz: either tone \geq 10MHz, 70dB below full scale
 Separation 7kHz to 1MHz: either tone $<$ 10MHz, 75dB below full scale (78dB for the 3586C)

Equipment Required:

- Synthesizer/Level Generator -hp- 3325A
- Synthesizer/Level Generator -hp- 3335A
- 75Ω unbalanced to 124Ω matching pad (3586A), see Figure 4-6
- 75Ω unbalanced to 135Ω matching pad (3586B), see Figure 4-6
- 75Ω unbalanced to 150Ω matching pad (3586A), see Figure 4-6
- 75Ω unbalanced to 600Ω matching pad, see Figure 4-6
- Cables and Adapters (see Table 4-4)
- (2) 50Ω to 75Ω minimum loss pads -hp- 11852A (pad)
- 1250-1473 (adaptor)
- 1250-1536 (adaptor)
- BNC "T" -hp- 1250-0781
- (2) 50Ω coaxial cables -hp- Part No. 11170A
- (3) 75Ω coaxial cables -hp- Part No. 11652-60012
- Power Combiner (see Figure 4-9).

Procedure:

- a. Connect the equipment as shown in the Figure 4-8.
- b. Initialize the 3586A/B/C by pressing RECALL , 0 . Select the 20Hz Band width. Select an Entry Mode, Full Scale of 0dBm. Select the 100dB Range, and the 75Ω input.
- c. Set the output of the 3325A to 8MHz at a level of +8.7dBm.

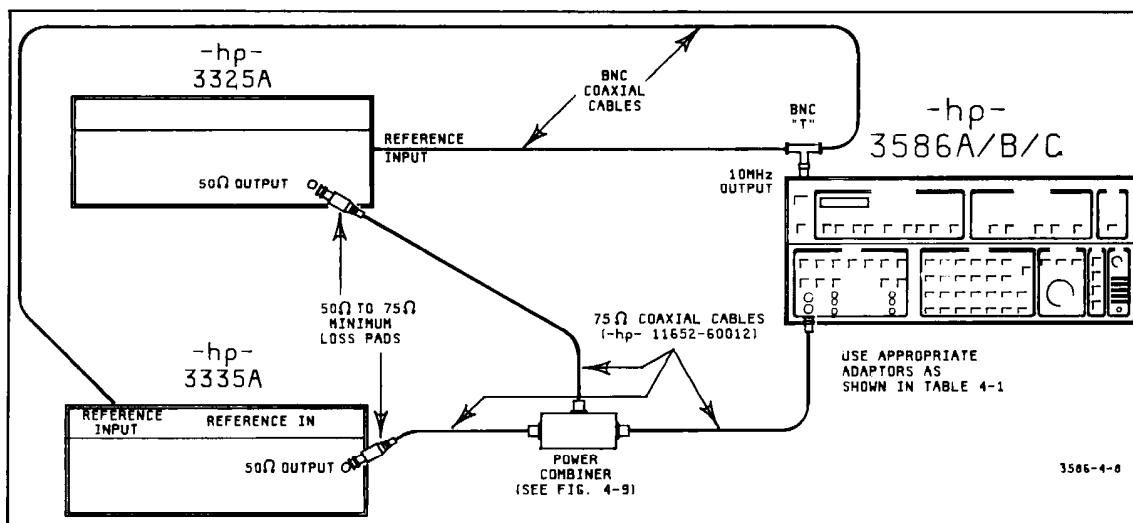


Figure 4-8. Intermodulation Distortion Test Set-Up.

- d. Set the output of the 3335A to 9MHz at a level of +8.7dBm.
- e. Since the 3586A/B/C is already tuned to 1MHz, the level reading represents the second order IM distortion. The reading should be less than or equal to -75dBm (-78dBm for a 3586C). Tune the 3586A/B/C to 17MHz. The level reading represents the other second order IM distortion. The level reading should be less than or equal to -75dBm (-78dBm for 3586C).
- f. Tune the 3586A/B/C to 10MHz. The level reading represents one of the third order IM distortions. The level should be less than or equal to -75dBm (-78dBm for a 3586C).
- g. Tune the 3586A/B/C to 7MHz. The level reading represents the other third order IM distortion. This level reading should be less than or equal to -75dBm (-78dBm for a 3586C).
- h. Change the frequency output of the 3325A to 20.993MHz. Change the frequency output of the 3335A to 21MHz.
- i. Tune the 3586A/B/C to 7kHz, 21.007MHz, and finally 20.986MHz. The level reading at each of these frequencies should be less than or equal to -70dBm.
- j. Disconnect the 75Ω BNC cable from the 75Ω input to the 3586A/B/C and connect it to the input of the 75Ω to 600Ω matching pad. Connect the output of this pad to the 600Ω input of the 3586A/B/C using a cable with the appropriate connectors as shown in Table 4-4.
- k. Select the 600Ω Input. Select the widest Bandwidth.
- l. Set the frequency output of the 3325A to 100kHz and the frequency of the 3335A to 99.800kHz. Tune the 3586A/B/C to 99.900kHz. The amplitudes of the 3335 and the 3325 should be +8.7dBm. Set the Full Scale of the 3586A/B/C to -15dBm.

Press **RDNG** **OFFSET** and turn the **OFFSET** **ON** .



This step assures the two sources to be of equal amplitude and of a level such that a reference level of 0dBm is established after the pad has been added to the test set-up.

- m. Set the frequency of the 3335A to 200Hz. Select the 20Hz Bandwidth.
- n. Tune the 3586A/B/C to 99.8kHz, 100.2kHz, and 199.8kHz. The level reading at each of these frequencies should be less than or equal to -75dBm (-78dBm for a 3586C).
- o. Set the frequency of the 3335A to 93kHz. Select the 20Hz bandwidth.
- p. Tune the 3586A/B/C to 7kHz, 107kHz, 193kHz, and 86kHz. The level at each of these frequencies should be less than or equal to -70dBm .

NOTE

The following steps apply to the 3586A and the 3586B only.

- q. Replace the 75Ω to 600Ω pad with the appropriate pad for the 135Ω or 150Ω input and cable as shown in Table 4-4.
- r. Select the 150Ω or 135Ω input. Select the widest Bandwidth.
- s. Set the frequency of the 3325 to 1MHz, and the frequency of the 3335A to 0.9998MHz. Tune the 3586A/B to 0.9999MHz. The amplitudes of the 3335A and the 3325A should be set to $+6.7\text{dBm}$ ($+5.7\text{dBm}$ when testing a 3586B). Set the Full Scale of the 3586A/B to -10dBm .



Press  and turn the  on.

- t. Set the frequency of the 3335A to 10kHz. Select the 20Hz Bandwidth.
- u. Tune the 3586A/B to 990kHz, 1.01MHz, and 1.99MHz. The level reading at each of these frequencies should be less than or equal to -75dBm .
- v. Set the frequency of the 3335A to 993kHz. Select the 20Hz bandwidth.
- w. Tune the 3586A/B to 7kHz, 1.993MHz, 1.007MHz, and 986kHz. The level reading at each frequency should be less than or equal to -70dBm .

NOTE

The following steps apply to the 3586B only.

- x. Replace the 75Ω to 135Ω pad with the 75Ω to 124Ω pad using a cable with the appropriate adapters as shown in Table 4-4.
- y. Select the 124Ω . Select the widest bandwidth.
- z. Set the frequency of the 3325A to 9MHz and the frequency of the 3335A to 9.0002MHz. Tune the 3586B to 9.0001MHz. The amplitudes of the 3335A and the 3325A should be set to $+5.7\text{dBm}$. Set the Full Scale of the 3586B to -10dBm .

Press  and turn the  on.

- aa. Set the 3335A to 8MHz. Select the 20Hz Bandwidth.
- bb. Tune the 3586B to 1MHz, 17MHz, 10MHz, and 7MHz. The level at each of these frequencies should be less than or equal to -75dBm .
- cc. Set the 3325A to 9MHz. Set the 3335A to 8.993MHz. Select the 20Hz bandwidth.
- dd. Tune the 3586B to 7kHz, 17.993MHz, 9.007MHz, and 8.986MHz. The level reading at each of these frequencies should be less than or equal to -70dBm .

4-45. IF Rejection.

4-46. This test verifies the rejection of the IF frequencies (50MHz and 15625Hz) in the 3586A/B/C

Specifications:

| | |
|---------|-----------------|
| 50MHz | -60dBm |
| 15625Hz | -80dBm |

Equipment:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| 75Ω Coaxial BNC Cable | -hp- Part No. 11652-60014 |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:

- a. Initialize both instruments by pressing RECALL , 0 .
- b. Connect the 50Ω side of the Minimum Loss Pad to the 50Ω output of the Synthesizer/Level Generator. Connect the 75Ω side of the pad to the 75Ω input of the 3586A/B/C using the 75Ω cable. Use an appropriate adapter as shown in Table 4-1.
- c. Set the output of the Synthesizer/Level Generator to 50MHz at 5.7dBm.
- d. Enter a FULL SCALE of 0dBm on the 3586A/B/C. Select the 100dB range.
- e. The level reading should be -60dBm or lower.
- f. Set the frequency of the Synthesizer/Level Generator to 15625Hz.
- g. The level reading on the 3586A/B/C should be no higher than -80dBm .

4-47. Wideband Power Flatness.

4-48. The purpose of this test is to check the wideband power flatness of the 3586A/B/C through its specified range.

Specification:

| | |
|----------------------|------------------------------------|
| (100dB Auto, AVE on) | |
| 20kHz to 10MHz | -1.0dB to $+1.0\text{dB}$ |
| 200Hz to 32MHz | -2.0dB to $+2.0\text{dB}$ |

Equipment Required:

- | | |
|---|-------------------------|
| Synthesizer/Level Generator | -hp- 3335A |
| Synthesizer/Level Generator | -hp- 3325A |
| (5) 75Ω Coaxial BNC cables | -hp- 11652-60014(2) |
| (3) 25Ω 0.1% Resistors (see Figure 4-9) | -hp- Part No. 0698-8011 |
| BNC Tee | -hp- Part No. 1250-0781 |
| (2) 50Ω to 75Ω Minimum Loss Pads | -hp- 11852A (pad) |
| | 1250-1473 (adaptor) |
| | 1250-1536 (adaptor) |

Procedure:

- a. Connect the equipment as shown in Figure 4-10.
- b. Initialize the 3586A/B/C by pressing **RECALL** , **0** .
- c. Press **WIDE BAND** on the 3586A/B/C, Press **AVE** .
- d. Set the output of the 3325A to 20kHz at a level of +8.7dBm.
- e. Set the output of the 3335A to 30kHz at a level of +8.7dBm.
- f. Press **RDNG→** and turn the **OFFSET** on.
- g. Change the frequency of the 3335A to 10MHz. The level reading on the 3586A/B/C should be between -0.8dBm0 and +0.8dBm0.*
- h. Change the frequency of the 3325A to 200Hz, and the frequency of the 3335A to 1kHz.
- i. Press **RDNG→** .
- j. Change the frequency of the 3335A to 32MHz. The level reading on the 3586A/B/C should be between -1.8dBm0 and +1.8dBm0.
- k. Repeat steps d through j, setting the amplitude of the two sources to -36.3dBm.

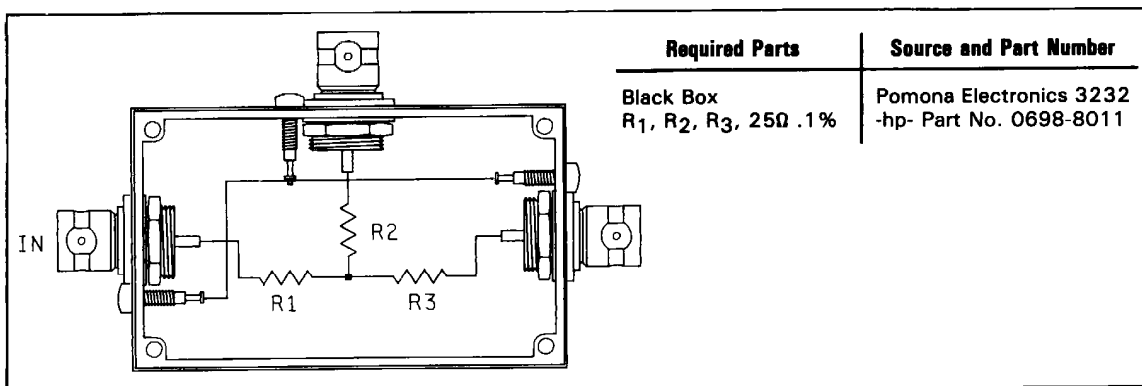


Figure 4-9. Power Combiner.

*0.2dB is subtracted from the spec to account for test system unflatness.

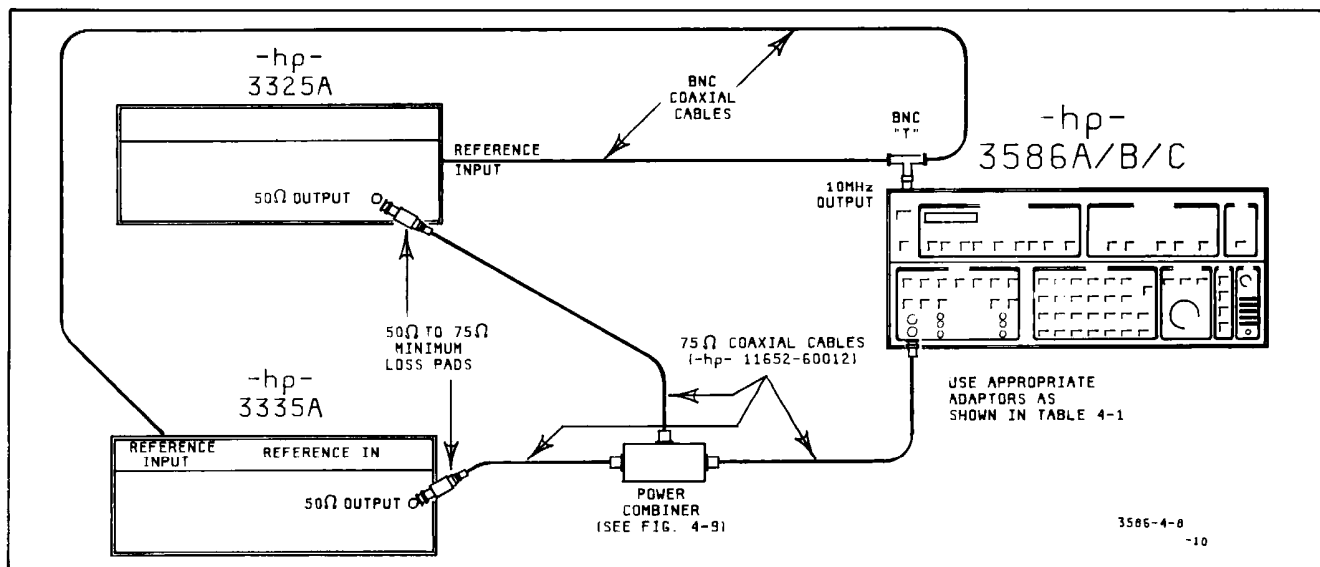


Figure 4-10. Wideband Power Accuracy Test Set-Up.

4-49. Tracking Output Test ("f₀ 0-32MHz" on Rear Panel).

4-50. Testing the Tracking Output consists of measuring its absolute level and flatness using the 75Ω input to the 3586A/B/C. This is possible because these two sections of the instrument operate independently.

Specifications:

| | |
|--|--------------------|
| Level 0dBm at 10kHz | - 0.50dB to 0.50dB |
| Flatness 200Hz to 32.5MHz (referenced at 10kHz) | - 0.50dB to 0.50dB |

Equipment Required:

| | |
|--|---------------------------|
| 75Ω Coaxial BNC Cable Adapter (see Table 4-1) | -hp- Part No. 11652-60114 |
|--|---------------------------|

Procedure:

- a. Connect the 75Ω input to the Tracking Output labeled "f₀ 0-32MHz" on the rear panel using the 75Ω cable.
- b. Initialize the instrument by pressing **RECALL** , **0** . Select the 75Ω input.
- c. Select the 20Hz Bandwidth. Turn the AVERAGE ON.
- d. Enter a frequency of 10kHz. The level should read from - 0.50dBm to + 0.50dBm.
- e. Press **RDNG** **→** **OFFSET** and turn the **OFFSET** on.
- f. Enter a frequency of 200Hz. The level should read from - 0.50dBm0 to + 0.50dBm0.
- g. Repeat step f for frequencies of 500kHz and 32.5MHz.

4-51. Phase Jitter Accuracy (Option 003 only).

4-52. Phase jitter accuracy is measured by summing two precision sources, 100Hz and 20dB apart, and measuring phase jitter generated by them.

Specifications:

For a tone $\leq 30\text{db}$ below Full Scale
 or -65dBm whichever is greater $\pm (10\% + 5^\circ\text{p-p})$

Equipment Required:

| | |
|--|------------------------------|
| Synthesizer/Level Generator | -hp- 3335A |
| Synthesizer/Level Generator | -hp- 3325A |
| (5) 75Ω Coaxial BNC Cables | -hp- Part No. 11652-60014(2) |
| (3) 25Ω .1% Resistors (see Figure 4-9) | -hp- Part No. 0698-8011 |

Procedure:

- a. Connect the equipment as shown in Figure 4-10 (see Paragraph 4-48).
- b. Initialize the 3586A/B by pressing RECALL , 0 .
- c. Set the output of the 3325A to 11004Hz at a level of -56dBm .
- d. Set the output of the 3335A to 11104Hz at a level of -76dBm .
- e. Select 100dB range. Tune the 3586A/B to 10kHz.
- f. Press ϕ JITTER . The reading of phase jitter should be from 10°p-p to 13°p-p .

NOTE

Step g applies only to those instruments which have "4-300Hz" silk screened under the "WTD 3100Hz" key.

g. Press the "WTD 3100Hz" key (4-300Hz ϕ JITTER). The reading of phase jitter should be from 10°p-p to 13°p-p .

4-53. Residual Phase Jitter (Option 003 only).

4-54. This test involves inputting a single frequency of very low phase jitter into the 3586A/B. Residual phase jitter of the instrument is then measured by reading phase jitter.

Specifications:

For a tone $\leq 35\text{dB}$ below full scale
 or -65dBm whichever is greater 0 to 0.5°p-p

Equipment Required:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 50Ω BNC Coaxial Cable | -hp- Part No. 11170A |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:

a. Connect the 10MHz (reference) output of the 3586A/B to the reference input of the Synthesizer/Level Generator using a BNC coaxial cable.

b. Connect the 50Ω side of the Minimum Loss Pad to the 50Ω output of the Synthesizer/Level Generator. Connect the 75Ω side of the pad to the 75Ω input of the 3586A/B using a 75Ω cable and adapter (see Table 4-1).

c. Initialize the 3586A/B by pressing **RECALL** , **0** . Select the 75Ω input.

d. Set the output of the Synthesizer/Level Generator to 50kHz at – 59.8dBm.

e. Enter a FULL-SCALE of – 30dBm into the 3586A/B. Select the 100dB Range.

f. Enter a frequency of 48996Hz into the 3586A/B.

g. Press “ϕ Jitter” and read the residual phase jitter; it should be less than or equal to 0.5° p-p.

h. Set the output of the Synthesizer/Level Generator to 2MHz at – 59.8dBm.

i. Enter a frequency of 1998996Hz into the 3586A/B.

j. The phase jitter reading should be less than or equal to 0.5° p-p.

4-55. WTD Filter (Option 003 only).

4-56. The purpose of this test is to check the calibration of the WTD filter at its calibration frequency.

Specifications:

| | |
|---|------------------|
| After calibration at 800Hz for 3586A, or at 1004Hz for 3586B | –0.5dB to +0.5dB |
|---|------------------|

Equipment:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 50Ω Coaxial BNC Cables | -hp- Part No. 11170A |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:

- a. Connect the equipment as in the previous test (see Paragraph 4-54, steps a and b).
- b. Initialize the 3586A/B by pressing , .
- c. Set the Synthesizer/Level Generator output to 999154Hz (998950Hz for testing a 3586A) at a level of 5.8dBm.
- d. Press , and turn the OFFSET on.
- e. Press to switch in the WTD filter. The 3586A/B should read a level from -0.5dBm0 to +0.5dBm0.

4-57. Notch Filter (Option 003 only).

4-58. This test confirms the performance of the notch filter by measuring the relative level of a tone after the notch filter is switched in.

Specifications:






995 to 1025Hz at least 50dB rejection

Equipment Required:

- | | |
|-----------------------------|---------------------------|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 75Ω Coaxial BNC cables | -hp- Part No. 11652-60014 |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) |
| | 1250-1473 (adaptor) |
| | 1250-1536 (adaptor) |

Procedure:

- a. Initialize the 3586A/B by pressing , .
- b. Connect the equipment as in the previous test (see Paragraph 4-54, steps a and b).
- c. Set the output of the Synthesizer/Level Generator to 1001010Hz at a level of 5.8dBm.
- d. Enter a of 0dBm into the 3586A/B. Select the Range.
- e. Press for the SSB Channel measurement. (for a 3586B.)

- f. Select the  bandwidth.
- g. Press  and turn on the .
- h. By switching to , the instrument reads the level of the tone after being rejected by the notch filter.
- i. The level reading should be less than -50dBm0 .
- j. Enter a  of 15Hz and step the entry frequency 15Hz above and below 1MHz checking that the level is still reading less than -50dBm0 at each of these frequencies. (For a 3586B, step 9Hz below and 21Hz above.)

4-59. Impulse Noise (Option 003 only).

4-60. The purpose of this test is to insure that the impulse noise counting rate as well as the accuracy of the threshold are within their specified limits.



Specifications:

| | |
|---|--------------------------|
| Counting Rate | |
| 3586A | 458 to 504 counts/minute |
| 3586B | 400 to 442 counts/minute |
| Threshold accuracy (1700 tone applied 1dB above and below -80dB threshold) | |
| threshold + 1dBm | > 1 count |
| threshold - 1dBm | ≤ 1 count |

Equipment Required:

| | |
|-----------------------------|---|
| Synthesizer/Level Generator | -hp- 3335A |
| (2) 75Ω coaxial BNC cables | -hp- Part No. 11652-60014 |
| Adapter (see Table 4-1) | |
| 50Ω to 75Ω Minimum Loss Pad | -hp- 11852A (pad) 1250-1473 (adaptor) 1250-1536 (adaptor) |

Procedure:

- a. Connect the equipment as Figure 4-10.
- b. Initialize the 3586A/B by pressing , .
- c. Set the output of the Synthesizer/Level Generator (-hp- 3335A) to 1001700Hz at a level of -69.3dBm (-72.3dBm for testing a 3586B).




- d. Set the output of the -hp- 3325A to 2MHz at -21.3dBm .
- e. Set the threshold level for the 3586A/B to -80dBm .
- f. Set the impulse measurement time to 1 minute.
- g. Press  ,  . The instrument should have counted, at the most, one count. IMPULSE — START
- h. Increase the output level of the Synthesizer/Level Generator (-hp- 3335A) by 2dB.
- i. Press  again. The instrument should now be counting. At the end of the 1 minute measurement interval, the instrument should have read from 400 to 442 counts (458 to 504 counts for a 3586A).

Table 4-9. Recommended Test Equipment.

| Equipment | Critical Specifications | Application* | Recommended -hp- Model No. |
|--|--|--------------|---|
| Synthesizer/Level Generator | 200Hz–65MHz, +10dBm– –80dBm, 00.01dB level resolution, frequency stability of less than 1×10^{-7} /year, calibrated at- attenuator. | P,A,R | 3335A opt. 001 (special) K06 |
| Synthesizer/Level Generator | 40Hz–21MHz, +10dBm– –45dBm, frequency stability of less than 5×10^{-6} /year. | P,A,R | 3325A |
| Oscilloscope | 100MHz BW | P,A,R | 180A/1808A/1821A |
| Spectrum Analyzer | 1kHz–32.5MHz, 60dB dynamic range. | P | 141T/8553B/8552B |
| | 1dB/Div Vertical Scale | A,R | 3585A |
| Digital Multimeter | ± 0.1 mV AC accuracy at 0.45V VRMS and 1kHz, $\pm 10\mu$ V DC ac- curacy at 6mV, $\pm 0.05\Omega$ accuracy at 20 Ω . | P,A,R | 3455A opt. 001 |
| RF Voltmeter | | R | 411A |
| RF Amplifier | +27dBm output, 15dB gain .5MHz to 32.5MHz. | P,A | Q-Bit, QB-188-LH-BNC with case and supply. Available from: Q-Bit P.O. Box 2208 Melbourne, Florida 32901 |
| Signature Analyzer | | R | 5004A |
| 100kHz Low Pass Filter | ≥ 48 dB/Octave Roll-off, 75 Ω input and output. | P | Available from: Allen Avionics 224E, 2nd St. Mineola, NY 11501 |
| 10MHz Low Pass Filter | ≥ 48 dB/Octave Roll-off, 75 Ω input and output. | P | |
| Attenuator (Calibrated) | ± 0.03 db with Cal. Sheet | P | 355D |
| 50 Ω Directional Bridge | ≥ 30 dB Return Loss ≥ 40 dB Directivity | P | 8721A |
| 75 Ω Directional Bridge | ≥ 30 db Return Loss ≥ 40 dB Directivity | P | 8721A opt. 008 |
| 124 Ω Return Loss Coupler (3586B Standard) | | P | Part No. 5061-1136 |
| 124 Ω Return Loss Coupler (3586B opt. 001) | | P | Part No. 5061-1137 |
| 150 Ω Return Loss Coupler | | P | Part No. 5061-1135 |
| 75 Ω .5V Thermal Converter | Must include Calibration sheet | P | 11051A, opt. 003 |
| (2) BNC "T" | | P | 12500781 |
| (m) BNC to (m) BNC adapter | | P | 1250-0216 |
| 75 Ω Resistor | 0.1% | P | 0698-7363 |
| 50 Ω Resistor | 0.1% | P | 0699-0064 |

Table 4.9 Recommended Test Equipment Cont'd.

| Equipment | Critical Specifications | Application* | Recommended -hp- Model No. |
|---|--------------------------------------|--------------|--|
| 50Ω 1V Thermal Converter | Must include Calibration sheet | P | 11050A, opt. 002 |
| Frequency Doubler | | P | 10515A |
| (2) 50Ω/75Ω Minimum Loss Pads | 50Hz to 32.5MHz, 30dB return loss. | P | 11852A Pad 1250-1473 Adapter 1250-1536 Adapter |
| 75Ω to balanced 124Ω matching pad, consisting of: | | P | |
| 10Ω Resistor | 1% | | 0757-0346 |
| 20Ω Resistor | 1% | | 0757-0384 |
| 121Ω Resistor | 1% | | 0757-0403 |
| 68.1Ω Resistor | 1% | | 0757-0397 |
| 20Ω Ten-Turn Potentiometer | | | 2100-3315 |
| 200Ω Ten-Turn Potentiometer | | | 2100-3095 |
| 2kΩ Ten-Turn Potentiometer | | | 2100-3109 |
| 1kΩ Ten-Turn Potentiometer | | | 2100-3154 |
| Enclosure | Three (f) BNC, grounded | | Pomona 3232 |
| 75Ω to Balanced 135Ω matching pad, consisting of: | | P | |
| 24.3Ω Resistor | 1% | | 0757-0386 |
| 121Ω Resistor | 1% | | 0757-0403 |
| 75Ω Resistor | 1% | | 0757-0398 |
| 500Ω Ten-Turn Potentiometer | | | 2100-3123 |
| 2kΩ Ten-Turn Potentiometer | | | 2100-3109 |
| 1kΩ Ten-Turn Potentiometer | | | 2100-3154 |
| Enclosure | Three (f) BNC, grounded | | Pomona 3232 |
| 75Ω to balanced 600Ω matching pad consisting of: | | P | |
| 10Ω Resistor | 1% | | 0757-0346 |
| 619Ω Resistor | 1% | | 0757-0418 |
| 110Ω Resistor | 1% | | 0757-0402 |
| 10Ω Ten-Turn Potentiometer | | | 2100-3164 |
| 10kΩ Ten-Turn Potentiometer | | | 2100-3103 |
| 500Ω Ten-Turn Potentiometer | | | 2100-3123 |
| Enclosure | Two (f) BNC, grounded | | Pomona 3230 |
| 75Ω to balanced 150Ω matching pad consisting of: | | | |
| 10Ω Resistor | 1% | | 0757-0346 |
| 36.5Ω Resistor | 1% | | 0757-0390 |
| 110Ω Resistor | 1% | | 0757-0402 |
| 82.5Ω Resistor | 1% | | 0757-0399 |
| 10Ω Ten-Turn Potentiometer | | | 2100-3164 |
| 500Ω Ten-Turn Potentiometer | | | 2100-3123 |
| (2) 2kΩ Ten-Turn Potentiometer | | | 2100-3109 |
| Enclosure | Two (f) BNC, isolated | | Pomona 3239 |
| Power Combiner Consisting of: | 75Ω | P | |
| (3) 25Ω Resistors | 0.1% | | 0698-8011 |
| Enclosure | Three (f) BNC, grounded | | Pomona 3232 |
| 124Ω Balance Testing Apparatus, consisting of: | | P | |
| (2) 10Ω Resistors | 1% | | 0757-0346 |
| (2) 62Ω Resistors | 0.1% | | 0698-6800 |
| Enclosure | Three (f) BNC, one (m) BNC, grounded | | Pomona 3234 |
| 135Ω Balance Testing Apparatus consisting of: | | P | |
| (2) 10Ω Resistors | 1% | | 0757-0346 |
| (2) 67.3Ω Resistors | 0.25% | | 0698-8558 |
| Enclosure | Three (f) BNC, one (m) BNC, grounded | | Pomona 3234 |



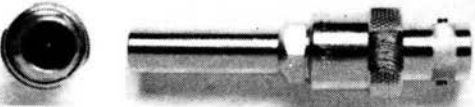
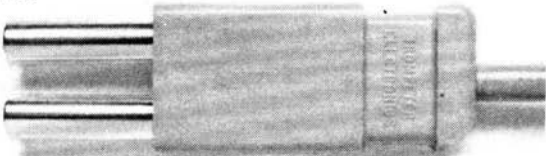

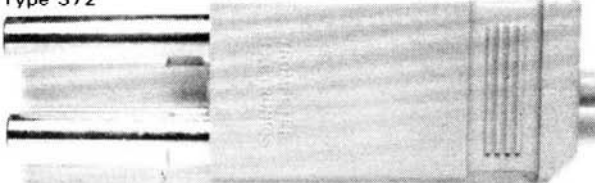

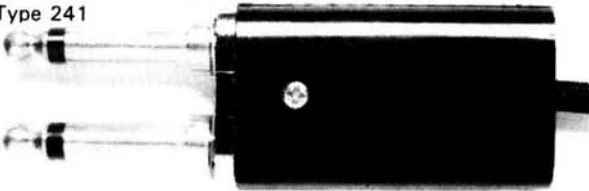

Table 4-9. Recommended Test Equipment Cont'd.

| Equipment | Critical Specifications | Application | Recommended -hp- Model No. |
|---|---|-------------|---|
| 600Ω Balance Testing Apparatus consisting of: (2) 10Ω Resistors (2) 300Ω Resistors Enclosure | 1% 0.1% Three (f) BNC, isolated | P | 0757-0346 0698-6346 Pomona 2102 |
| 150Ω Balance Testing Apparatus, consisting of: (2) 10Ω Resistors (2) 75Ω Resistors Enclosure | 1% 0.1% Three (f) BNC, isolated | | 0757-0346 0698-7363 Pomona 2102 Available from: Pomona Electronics P.O. Box 2767 Pomona, CA 91766 |
| 600Ω Feedthrough, consisting of: 600Ω Resistor Connector Connector Connector Threaded Sleeve | 0.1% BNC BNC BNC BNC | | 0698-7408 1250-0052 11048-27603 1250-0083 11048-27604 |
| (3) 75Ω BNC Coaxial Cables | 3' | P | 11652-60014 |
| (2) 75Ω BNC Coaxial Cables | 2' | P | 11652-60013 |
| (3) 75Ω BNC Coaxial Cables | 1' | P | 11652-60012 |
| (3) 50Ω BNC Coaxial Cables | 1' | P | 11170A |
| Siemens 3-prong to (m) BNC Cable (must be modified, see Table 4-4) (3586A only)** | | P,A,R | W & G, k164 |
| Siemens 1.6/5.6mm to (f) BNC Adapter (3586A opt 001 only)** | | P,A,R | W & G, s230 Available from: W & G Instruments Inc. 119 Naylor Ave. Livingston, NJ 07039 |
| (2) (m) BNC to single Banana jack adapter | | P | Pomona 3430-0 |
| (3) Mini-Weco to (f) BNC adapter (3586B standard)** | | P | 1250-0556 |
| (3) Large-Weco to (f) BNC adapter (3586B opt. 001)** | | P | 1250-0591 |
| (2) 1/4" Phone Plug to (f) BNC adapter (3586B)** | | P | 1251-3759 |
| Weco 310 plug to (f) BNC adapter (3586B)** | | P | 1251-3757 |
| Dual Banana to (f) BNC adapter (3586C) | | P | 1251-2277 |

* P-Performance Tests; A-Adjustments; R-Repair.

**See Table 4-10.

Table 4-10. BNC Adapters.
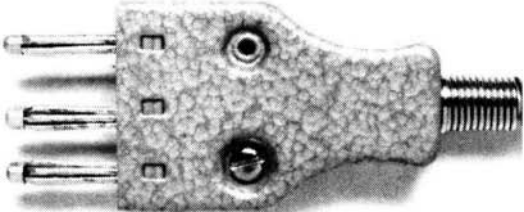
| ADAPTER DESC. | | |
|---|---|---|
| Siemens 3-prong to (M) BNC Cable (must be modified) | Siemens 3-Prong  | Available From: W&G Instruments, Inc., 119 Naylor Avenue, Livingston, N.J. 07039 |
| Siemens 1.6/5.6mm to (F) BNC Adapter | Siemens 1.6/5.6mm Model S230  | Available From: W&G Instruments, Inc. 119 Naylor Avenue, Livingston, N.J. 07039 |
| Mini-Weco to (F) BNC Adapter | (2) WECO Type 440 or  | WECO Type 440 -hp- P/N 1250-0556 |
| | (1) WECO Type 443  | WECO Type 443 Available From: Trompeter Electronics 8936 Comanche Ave., Chatsworth, CA. 91311 |
| Large-Weco to (F) BNC Adapter | (2) WECO Type 358 or  | WECO Type 358 -hp- P/N 1250-0591 |
| | (1) WECO Type 372  | WECO Type 372 Available From: Trompeter Electronics 8936 Comanche Ave., Chatsworth, CA. 91311 |
| ¼" Phone Plug to (F) BNC Adapter | (2) WECO Type 347 or  | WECO Type 347 -hp- P/N 1251-3759 |
| | (1) WECO Type 241  | WECO Type 241 Available From: Pomona Electronics, 1500 East Ninth St., Pomona, CA. 91766 |
| WECO 310 Plug to (F) BNC Adapter | WECO Type 310  | -hp- P/N 1251-3757 |

PERFORMANCE TEST RECORD

HEWLETT-PACKARD MODEL 3586A/B/C

Tests Performed By _____

SELECTIVE LEVEL METER

Date _____

SERIAL NO. _____

CENTER FREQUENCY ACCURACY (4-13)

"Beating" period = _____ms \geq 10 milliseconds

COUNTER SENSITIVITY AND ACCURACY (4-15)

-hp- 3586A/B/C

| | | |
|-------------|-----------------|---------------|
| Min | Counter Reading | Max |
| 999 999.0Hz | _____ Hz | 1 000 001.0Hz |

RETURN LOSS (4-17)

| | Frequency | Min | Return Loss |
|--------------|---------------|----------------|----------------|
| 75 Ω | 1MHz | 30dB | _____ dB |
| | 32.5MHz | 30dB | _____ dB |
| 50 Ω | 1MHz | 30dB | _____ dB |
| | 32.5MHz | 30dB | _____ dB |
| 150 Ω | 1MHz | 30dB | _____ dB |
| | 10kHz | 30dB | _____ dB |
| 124 Ω | 5MHz | 30dB | _____ dB |
| | 10kHz | 30dB | _____ dB |
| | Min | Resistance | Max |
| 135 Ω | 19.9 Ω | _____ Ω | 21.31 Ω |
| | 19.9 Ω | _____ Ω | 21.31 Ω |
| | Frequency | Min | Return Loss |
| 600 Ω | 50Hz | 25dB | _____ dB |
| | 108kHz | 25dB | _____ dB |

BALANCE (4-19)

| | Frequency | Balance Reading | Max |
|--------------|-----------|-----------------|----------|
| 600 Ω | 50Hz | _____ dBm0 | - 40dBm0 |
| | 108kHz | _____ dBm0 | - 40dBm0 |
| 150 Ω | 10kHz | _____ dBm0 | - 36dBm0 |
| | 1MHz | _____ dBm0 | - 36dBm0 |
| 124 Ω | 10kHz | _____ dBm0 | - 36dBm0 |
| | 10MHz | _____ dBm0 | - 36dBm0 |
| 135 Ω | 10kHz | _____ dBm0 | - 36dBm0 |
| | 1MHz | _____ dBm0 | - 36dBm0 |

AMPLITUDE ACCURACY (4-21)

$$P = 10 \log \frac{V^2}{.075} = \text{_____ dBm.}$$

$$V_{th} = \text{_____ volts.}$$

| Column 1 Frequency | Column 2 -hp- 3335A Setting To Produce V_{th} | Column 3 Thermal Converter Error | Column 4 -hp- 3335A Setting To Produce Flat Test Signal (Column 2-Column 3) |
|-----------------------|---|--|--|
| 1kHz | 10.0dBm | 0dB | 10.00dBm |
| 1MHz | _____ dBm | _____ dB | _____ dBm |
| 3MHz | _____ dBm | _____ dB | _____ dBm |
| 10MHz | _____ dBm | _____ dB | _____ dBm |
| 30MHz | _____ dBm | _____ dB | _____ dBm |

$$P_{1kHz} = P + 2dB + (2dB \text{ step error for } 1kHz)$$

$$P_{1MHz} = P + 2dB + (2dB \text{ step error for } 1MHz)$$

$$P_{3MHz} = P + 2dB + (2dB \text{ step error for } 3MHz)$$

$$P_{10MHz} = P + 2dB + (2dB \text{ step error for } 10MHz)$$

$$P_{30MHz} = P + 2dB + (2dB \text{ step error for } 30MHz)$$

75 ohms, 1kHz, +4dBm to -100dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586A/B/C Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|---------------------------------|--|---------------|
| 2dB | $P_{1kHz} - 2.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 1.64dB - (\text{_____})$ | |
| 4dB | $P_{1kHz} - 4.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 3.64dB - (\text{_____})$ | |
| 6dB | $P_{1kHz} - 6.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 5.64dB - (\text{_____})$ | |
| 8dB | $P_{1kHz} - 8.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 7.64dB - (\text{_____})$ | |
| 10dB | $P_{1kHz} - 10.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 9.64dB - (\text{_____})$ | |
| 20dB | $P_{1kHz} - 20.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 19.64dB - (\text{_____})$ | |
| 30dB | $P_{1kHz} - 30.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 29.64dB - (\text{_____})$ | |
| 40dB | $P_{1kHz} - 40.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 39.64dB - (\text{_____})$ | |
| 50dB | $P_{1kHz} - 50.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 49.64dB - (\text{_____})$ | |
| 60dB | $P_{1kHz} - 60.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 59.64dB - (\text{_____})$ | |
| 70dB | $P_{1kHz} - 70.36dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 69.64dB - (\text{_____})$ | |
| **66dB | $P_{1kHz} - 106.91dB - (\text{_____})$ | | _____ dBm | $P_{1kHz} - 105.09dB - (\text{_____})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

75 ohms, 1MHz, +4dBm to -100dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586A/B/C Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|---------------------------------|--|---------------|
| 2dB | $P_{1\text{MHz}} - 2.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 1.84\text{dB} - (\text{---})$ | |
| 4dB | $P_{1\text{MHz}} - 4.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 3.84\text{dB} - (\text{---})$ | |
| 6dB | $P_{1\text{MHz}} - 6.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 5.84\text{dB} - (\text{---})$ | |
| 8dB | $P_{1\text{MHz}} - 8.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 7.84\text{dB} - (\text{---})$ | |
| 10dB | $P_{1\text{MHz}} - 10.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 9.84\text{dB} - (\text{---})$ | |
| 20dB | $P_{1\text{MHz}} - 20.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 19.84\text{dB} - (\text{---})$ | |
| 30dB | $P_{1\text{MHz}} - 30.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 29.84\text{dB} - (\text{---})$ | |
| 40dB | $P_{1\text{MHz}} - 40.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 39.84\text{dB} - (\text{---})$ | |
| 50dB | $P_{1\text{MHz}} - 50.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 49.84\text{dB} - (\text{---})$ | |
| 60dB | $P_{1\text{MHz}} - 60.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 59.84\text{dB} - (\text{---})$ | |
| 70dB | $P_{1\text{MHz}} - 70.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 69.84\text{dB} - (\text{---})$ | |
| **66dB | $P_{1\text{MHz}} - 106.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 105.29\text{dB} - (\text{---})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

75 ohms, 3MHz, +4dBm to -100dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586A/B/C Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|---------------------------------|--|---------------|
| 2dB | $P_{3\text{MHz}} - 2.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 1.84\text{dB} - (\text{---})$ | |
| 4dB | $P_{3\text{MHz}} - 4.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 3.84\text{dB} - (\text{---})$ | |
| 6dB | $P_{3\text{MHz}} - 6.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 5.84\text{dB} - (\text{---})$ | |
| 8dB | $P_{3\text{MHz}} - 8.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 7.84\text{dB} - (\text{---})$ | |
| 10dB | $P_{3\text{MHz}} - 10.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 9.84\text{dB} - (\text{---})$ | |
| 20dB | $P_{3\text{MHz}} - 20.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 19.84\text{dB} - (\text{---})$ | |
| 30dB | $P_{3\text{MHz}} - 30.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 29.84\text{dB} - (\text{---})$ | |
| 40dB | $P_{3\text{MHz}} - 40.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 39.84\text{dB} - (\text{---})$ | |
| 50dB | $P_{3\text{MHz}} - 50.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 49.84\text{dB} - (\text{---})$ | |
| 60dB | $P_{3\text{MHz}} - 60.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 59.84\text{dB} - (\text{---})$ | |
| 70dB | $P_{3\text{MHz}} - 70.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 69.84\text{dB} - (\text{---})$ | |
| **66dB | $P_{3\text{MHz}} - 106.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 105.29\text{dB} - (\text{---})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

75 ohms, 10MHz, +4dBm to -100dBm

-hp- 3335A

Attenuator

-hp- 3586A/B/C

| Step | Min. | Step Error | Level Reading | Max. | Step Error |
|--------|---|------------|---------------|---|------------|
| 2dB | $P_{10\text{MHz}} - 2.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 1.84\text{dB} - (\text{---})$ | |
| 4dB | $P_{10\text{MHz}} - 4.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 3.84\text{dB} - (\text{---})$ | |
| 6dB | $P_{10\text{MHz}} - 6.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 5.84\text{dB} - (\text{---})$ | |
| 8dB | $P_{10\text{MHz}} - 8.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 7.84\text{dB} - (\text{---})$ | |
| 10dB | $P_{10\text{MHz}} - 10.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 9.84\text{dB} - (\text{---})$ | |
| 20dB | $P_{10\text{MHz}} - 20.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 19.84\text{dB} - (\text{---})$ | |
| 30dB | $P_{10\text{MHz}} - 30.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 29.84\text{dB} - (\text{---})$ | |
| 40dB | $P_{10\text{MHz}} - 40.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 39.84\text{dB} - (\text{---})$ | |
| 50dB | $P_{10\text{MHz}} - 50.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 49.84\text{dB} - (\text{---})$ | |
| 60dB | $P_{10\text{MHz}} - 60.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 59.84\text{dB} - (\text{---})$ | |
| 70dB | $P_{10\text{MHz}} - 70.16\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 69.84\text{dB} - (\text{---})$ | |
| **66dB | $P_{10\text{MHz}} - 106.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 105.29\text{dB} - (\text{---})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

75 ohms, 30MHz, +4dBm to -100dBm

-hp- 3335A

Attenuator

-hp- 3586A/B/C

| Step | Min. | Step Error | Level Reading | Max. | Step Error |
|--------|---|------------|---------------|---|------------|
| 2dB | $P_{30\text{MHz}} - 2.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 1.79\text{dB} - (\text{---})$ | |
| 4dB | $P_{30\text{MHz}} - 4.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 3.79\text{dB} - (\text{---})$ | |
| 6dB | $P_{30\text{MHz}} - 6.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 5.79\text{dB} - (\text{---})$ | |
| 8dB | $P_{30\text{MHz}} - 8.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 7.79\text{dB} - (\text{---})$ | |
| 10dB | $P_{30\text{MHz}} - 10.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 9.79\text{dB} - (\text{---})$ | |
| 20dB | $P_{30\text{MHz}} - 20.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 19.79\text{dB} - (\text{---})$ | |
| 30dB | $P_{30\text{MHz}} - 30.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 29.79\text{dB} - (\text{---})$ | |
| 40dB | $P_{30\text{MHz}} - 40.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 39.79\text{dB} - (\text{---})$ | |
| 50dB | $P_{30\text{MHz}} - 50.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 49.79\text{dB} - (\text{---})$ | |
| 60dB | $P_{30\text{MHz}} - 60.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 59.79\text{dB} - (\text{---})$ | |
| 70dB | $P_{30\text{MHz}} - 70.21\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 69.79\text{dB} - (\text{---})$ | |
| **66dB | $P_{30\text{MHz}} - 106.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{30\text{MHz}} - 105.29\text{dB} - (\text{---})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

600 ohms, 1kHz, -11 dBm to -100dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586A/B/C Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|---------------------------------|--|---------------|
| 2dB | $P_{1\text{kHz}} - 17.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 16.69\text{dB} - (\text{---})$ | |
| 4dB | $P_{1\text{kHz}} - 19.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 18.69\text{dB} - (\text{---})$ | |
| 6dB | $P_{1\text{kHz}} - 21.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 20.69\text{dB} - (\text{---})$ | |
| 8dB | $P_{1\text{kHz}} - 23.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 22.69\text{dB} - (\text{---})$ | |
| 10dB | $P_{1\text{kHz}} - 25.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 24.69\text{dB} - (\text{---})$ | |
| 20dB | $P_{1\text{kHz}} - 35.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 34.69\text{dB} - (\text{---})$ | |
| 30dB | $P_{1\text{kHz}} - 45.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 44.69\text{dB} - (\text{---})$ | |
| 40dB | $P_{1\text{kHz}} - 55.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 54.69\text{dB} - (\text{---})$ | |
| 50dB | $P_{1\text{kHz}} - 65.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 64.69\text{dB} - (\text{---})$ | |
| 60dB | $P_{1\text{kHz}} - 75.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 74.69\text{dB} - (\text{---})$ | |
| 70dB | $P_{1\text{kHz}} - 85.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 84.69\text{dB} - (\text{---})$ | |
| ** 50dB | $P_{1\text{kHz}} - 105.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{kHz}} - 104.29\text{dB} - (\text{---})$ | |

**Insert 40dB of attenuation using the -hp- 355D. Be sure to subtract its error from the test limits.

150 ohms, 1MHz, -4dBm to -100dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586A Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|-----------------------------|--|---------------|
| 2dB | $P_{1\text{MHz}} - 10.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 9.69\text{dB} - (\text{---})$ | |
| 4dB | $P_{1\text{MHz}} - 12.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 11.69\text{dB} - (\text{---})$ | |
| 6dB | $P_{1\text{MHz}} - 14.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 13.69\text{dB} - (\text{---})$ | |
| 8dB | $P_{1\text{MHz}} - 16.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 15.69\text{dB} - (\text{---})$ | |
| 10dB | $P_{1\text{MHz}} - 18.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 17.69\text{dB} - (\text{---})$ | |
| 20dB | $P_{1\text{MHz}} - 28.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 27.69\text{dB} - (\text{---})$ | |
| 30dB | $P_{1\text{MHz}} - 38.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 37.69\text{dB} - (\text{---})$ | |
| 40dB | $P_{1\text{MHz}} - 48.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 47.69\text{dB} - (\text{---})$ | |
| 50dB | $P_{1\text{MHz}} - 58.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 57.69\text{dB} - (\text{---})$ | |
| 60dB | $P_{1\text{MHz}} - 68.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 67.69\text{dB} - (\text{---})$ | |
| 70dB | $P_{1\text{MHz}} - 78.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 77.69\text{dB} - (\text{---})$ | |
| 98dB | $P_{1\text{MHz}} - 106.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 105.29\text{dB} - (\text{---})$ | |

135 ohms, 1MHz, -3dBm to -99dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586B Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|-----------------------------|--|---------------|
| 2dB | $P_{1\text{MHz}} - 9.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 8.69\text{dB} - (\text{---})$ | |
| 4dB | $P_{1\text{MHz}} - 11.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 10.69\text{dB} - (\text{---})$ | |
| 6dB | $P_{1\text{MHz}} - 13.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 12.69\text{dB} - (\text{---})$ | |
| 8dB | $P_{1\text{MHz}} - 15.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 14.69\text{dB} - (\text{---})$ | |
| 10dB | $P_{1\text{MHz}} - 17.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 16.69\text{dB} - (\text{---})$ | |
| 20dB | $P_{1\text{MHz}} - 27.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 26.69\text{dB} - (\text{---})$ | |
| 30dB | $P_{1\text{MHz}} - 37.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 36.69\text{dB} - (\text{---})$ | |
| 40dB | $P_{1\text{MHz}} - 47.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 46.69\text{dB} - (\text{---})$ | |
| 50dB | $P_{1\text{MHz}} - 57.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 56.69\text{dB} - (\text{---})$ | |
| 60dB | $P_{1\text{MHz}} - 67.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 66.69\text{dB} - (\text{---})$ | |
| 70dB | $P_{1\text{MHz}} - 77.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 76.69\text{dB} - (\text{---})$ | |
| 98dB | $P_{1\text{MHz}} - 105.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 104.29\text{dB} - (\text{---})$ | |

124 ohms, 1MHz, -3dBm to -99dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586B Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|-----------------------------|--|---------------|
| 2dB | $P_{1\text{MHz}} - 9.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 8.69\text{dB} - (\text{---})$ | |
| 4dB | $P_{1\text{MHz}} - 11.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 10.69\text{dB} - (\text{---})$ | |
| 6dB | $P_{1\text{MHz}} - 13.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 12.69\text{dB} - (\text{---})$ | |
| 8dB | $P_{1\text{MHz}} - 15.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 14.69\text{dB} - (\text{---})$ | |
| 10dB | $P_{1\text{MHz}} - 17.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 16.69\text{dB} - (\text{---})$ | |
| 20dB | $P_{1\text{MHz}} - 27.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 26.69\text{dB} - (\text{---})$ | |
| 30dB | $P_{1\text{MHz}} - 37.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 36.69\text{dB} - (\text{---})$ | |
| 40dB | $P_{1\text{MHz}} - 47.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 46.69\text{dB} - (\text{---})$ | |
| 50dB | $P_{1\text{MHz}} - 57.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 56.69\text{dB} - (\text{---})$ | |
| 60dB | $P_{1\text{MHz}} - 67.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 66.69\text{dB} - (\text{---})$ | |
| 70dB | $P_{1\text{MHz}} - 77.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 76.69\text{dB} - (\text{---})$ | |
| 98dB | $P_{1\text{MHz}} - 105.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{1\text{MHz}} - 104.29\text{dB} - (\text{---})$ | |

124 ohms, 3MHz, -3dBm to -99dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586B Level Reading | Max. | Step Error |
|----------------------------------|--|---------------|-----------------------------|--|---------------|
| 2dB | $P_{3\text{MHz}} - 9.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 8.69\text{dB} - (\text{---})$ | |
| 4dB | $P_{3\text{MHz}} - 11.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 10.69\text{dB} - (\text{---})$ | |
| 6dB | $P_{3\text{MHz}} - 13.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 12.69\text{dB} - (\text{---})$ | |
| 8dB | $P_{3\text{MHz}} - 15.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 14.69\text{dB} - (\text{---})$ | |
| 10dB | $P_{3\text{MHz}} - 17.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 16.69\text{dB} - (\text{---})$ | |
| 20dB | $P_{3\text{MHz}} - 27.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 26.69\text{dB} - (\text{---})$ | |
| 30dB | $P_{3\text{MHz}} - 37.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 36.69\text{dB} - (\text{---})$ | |
| 40dB | $P_{3\text{MHz}} - 47.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 46.69\text{dB} - (\text{---})$ | |
| 50dB | $P_{3\text{MHz}} - 57.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 56.69\text{dB} - (\text{---})$ | |
| 60dB | $P_{3\text{MHz}} - 67.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 66.69\text{dB} - (\text{---})$ | |
| 70dB | $P_{3\text{MHz}} - 77.31\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 76.69\text{dB} - (\text{---})$ | |
| 98dB | $P_{3\text{MHz}} - 105.71\text{dB} - (\text{---})$ | | _____ dBm | $P_{3\text{MHz}} - 104.29\text{dB} - (\text{---})$ | |

124 ohms, 10MHz, -3dBm to -99dBm

| -hp- 3335A Attenuator Step | Min. | Step Error | -hp- 3586B Level Reading | Max. | Step Error |
|----------------------------------|---|---------------|-----------------------------|---|---------------|
| 2dB | $P_{10\text{MHz}} - 9.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 8.54\text{dB} - (\text{---})$ | |
| 4dB | $P_{10\text{MHz}} - 11.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 10.54\text{dB} - (\text{---})$ | |
| 6dB | $P_{10\text{MHz}} - 13.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 12.54\text{dB} - (\text{---})$ | |
| 8dB | $P_{10\text{MHz}} - 15.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 14.54\text{dB} - (\text{---})$ | |
| 10dB | $P_{10\text{MHz}} - 17.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 16.54\text{dB} - (\text{---})$ | |
| 20dB | $P_{10\text{MHz}} - 27.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 26.54\text{dB} - (\text{---})$ | |
| 30dB | $P_{10\text{MHz}} - 37.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 36.54\text{dB} - (\text{---})$ | |
| 40dB | $P_{10\text{MHz}} - 47.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 46.54\text{dB} - (\text{---})$ | |
| 50dB | $P_{10\text{MHz}} - 57.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 56.54\text{dB} - (\text{---})$ | |
| 60dB | $P_{10\text{MHz}} - 67.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 66.54\text{dB} - (\text{---})$ | |
| 70dB | $P_{10\text{MHz}} - 77.46\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 76.54\text{dB} - (\text{---})$ | |
| 98dB | $P_{10\text{MHz}} - 105.96\text{dB} - (\text{---})$ | | _____ dBm | $P_{10\text{MHz}} - 104.04\text{dB} - (\text{---})$ | |

$$P_c = 10 \log \frac{V^2}{.05} = \text{_____ dBm.}$$

$$V_{thc} = \text{_____ volts.}$$

| Column 1c Frequency | Column 2c -hp- 3335A Setting To Produce V_{thc} | Column 3c Thermal Converter Error | Column 4c -hp- 3335A Setting To Produce Flat Test Signal (Column 2-Column 3) |
|------------------------|---|---|---|
| 1kHz | 12.50dBm | 0dB | 12.50dBm |
| 1MHz | _____ dBm | _____ dB | _____ dBm |
| 3MHz | _____ dBm | _____ dB | _____ dBm |
| 10MHz | _____ dBm | _____ dB | _____ dBm |
| 30MHz | _____ dBm | _____ dB | _____ dBm |

50 ohm, 12.50dBm

| Frequency | Min. | -hp- 3586C Level Reading | Max. |
|-----------|-----------------------|-----------------------------|-----------------------|
| 1kHz | $P_c - 0.37\text{dB}$ | _____ dBm | $P_c + 0.37\text{dB}$ |
| 1MHz | $P_c - 0.17\text{dB}$ | _____ dBm | $P_c + 0.17\text{dB}$ |
| MHz | $P_c - 0.17\text{dB}$ | _____ dBm | $P_c + 0.17\text{dB}$ |
| 10MHz | $P_c - 0.17\text{dB}$ | _____ dBm | $P_c + 0.17\text{dB}$ |
| 30MHz | $P_c - 0.22\text{dB}$ | _____ dBm | $P_c + 0.22\text{dB}$ |

| Column 5 Frequency | Column 6 -hp- 3335A Setting To Produce V_{th} | Column 7 Thermal Converter Error | Column 8 -hp- 3335A Setting To Produce Flat Test Signal (Column 2-Column 3) |
|-----------------------|---|--|--|
| 1MHz | _____ dBm | _____ dB | _____ dBm |
| 3MHz | _____ dBm | _____ dB | _____ dBm |
| 10MHz | _____ dBm | _____ dB | _____ dBm |
| 30MHz | _____ dBm | _____ dB | _____ dBm |

$$P_{1\text{MHz}} = P + 18\text{dB} + (18\text{dB step error for 1MHz})$$

$$P_{3\text{MHz}} = P + 18\text{dB} + (18\text{dB step error for 3MHz})$$

$$P_{10\text{MHz}} = P + 18\text{dB} + (18\text{dB step error for 10MHz})$$

$$P_{30\text{MHz}} = P + 18\text{dB} + (18\text{dB step error for 30MHz})$$

75 ohms, 1MHz, +4dBm to +20dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586A/B/C Level Reading | Max. |
|----------------------------------|---|---------------------------------|---|
| 18dB | $P_{1\text{MHz}} - 18.16\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 17.84\text{dB} - (\text{---})$ |
| 10dB | $P_{1\text{MHz}} - 10.16\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 9.84\text{dB} - (\text{---})$ |
| 6dB | $P_{1\text{MHz}} - 6.16\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 5.84\text{dB} - (\text{---})$ |
| 2dB | $P_{1\text{MHz}} - 2.16\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 1.84\text{dB} - (\text{---})$ |

75 ohms, 3MHz, +4dBm to +20dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586A/B/C Level Reading | Max. |
|----------------------------------|---|---------------------------------|---|
| 18dB | $P_{3\text{MHz}} - 18.16\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 17.84\text{dB} - (\text{---})$ |
| 10dB | $P_{3\text{MHz}} - 10.16\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 9.84\text{dB} - (\text{---})$ |
| 6dB | $P_{3\text{MHz}} - 6.16\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 5.84\text{dB} - (\text{---})$ |
| 2dB | $P_{3\text{MHz}} - 2.16\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 1.84\text{dB} - (\text{---})$ |

75 ohms, 10MHz, +4dBm to +20dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586A/B/C Level Reading | Max. |
|----------------------------------|--|---------------------------------|--|
| 18dB | $P_{10\text{MHz}} - 18.16\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 17.84\text{dB} - (\text{---})$ |
| 10dB | $P_{10\text{MHz}} - 10.16\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 9.84\text{dB} - (\text{---})$ |
| 6dB | $P_{10\text{MHz}} - 6.16\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 5.84\text{dB} - (\text{---})$ |
| 2dB | $P_{10\text{MHz}} - 2.16\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 1.84\text{dB} - (\text{---})$ |

75 ohms, 30MHz, +4dBm to +20dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586A/B/C Level Reading | Max. |
|----------------------------------|--|---------------------------------|--|
| 18dB | $P_{30\text{MHz}} - 18.21\text{dB} - (\text{---})$ | _____ dBm | $P_{30\text{MHz}} - 17.79\text{dB} - (\text{---})$ |
| 10dB | $P_{30\text{MHz}} - 10.21\text{dB} - (\text{---})$ | _____ dBm | $P_{30\text{MHz}} - 9.79\text{dB} - (\text{---})$ |
| 6dB | $P_{30\text{MHz}} - 6.21\text{dB} - (\text{---})$ | _____ dBm | $P_{30\text{MHz}} - 5.79\text{dB} - (\text{---})$ |
| 2dB | $P_{30\text{MHz}} - 2.21\text{dB} - (\text{---})$ | _____ dBm | $P_{30\text{MHz}} - 1.79\text{dB} - (\text{---})$ |

150 ohms, 1MHz, -4dBm to +12dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586A Level Reading | Max. |
|----------------------------------|---|-----------------------------|---|
| 18dB | $P_{1\text{MHz}} - 26.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 25.69\text{dB} - (\text{---})$ |
| 10dB | $P_{1\text{MHz}} - 18.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 17.69\text{dB} - (\text{---})$ |
| 6dB | $P_{1\text{MHz}} - 14.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 13.69\text{dB} - (\text{---})$ |
| 2dB | $P_{1\text{MHz}} - 10.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 9.69\text{dB} - (\text{---})$ |

135 ohms, 1MHz, -3dBm to +13dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586B Level Reading | Max. |
|----------------------------------|---|-----------------------------|---|
| 18dB | $P_{1\text{MHz}} - 25.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 24.69\text{dB} - (\text{---})$ |
| 10dB | $P_{1\text{MHz}} - 17.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 16.69\text{dB} - (\text{---})$ |
| 6dB | $P_{1\text{MHz}} - 13.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 12.69\text{dB} - (\text{---})$ |
| 2dB | $P_{1\text{MHz}} - 9.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 8.69\text{dB} - (\text{---})$ |

124 ohms, 1MHz, -3dBm to +13dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586B Level Reading | Max. |
|----------------------------------|---|-----------------------------|---|
| 18dB | $P_{1\text{MHz}} - 25.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 24.69\text{dB} - (\text{---})$ |
| 10dB | $P_{1\text{MHz}} - 17.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 16.69\text{dB} - (\text{---})$ |
| 6dB | $P_{1\text{MHz}} - 13.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 12.69\text{dB} - (\text{---})$ |
| 2dB | $P_{1\text{MHz}} - 9.31\text{dB} - (\text{---})$ | _____ dBm | $P_{1\text{MHz}} - 8.69\text{dB} - (\text{---})$ |

124 ohms, 3MHz, -3dBm to +13dBm

| -hp- 3335A Attenuator Step | Min. | -hp- 3586B Level Reading | Max. |
|----------------------------------|---|-----------------------------|---|
| 18dB | $P_{3\text{MHz}} - 25.31\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 24.69\text{dB} - (\text{---})$ |
| 10dB | $P_{3\text{MHz}} - 17.31\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 16.69\text{dB} - (\text{---})$ |
| 6dB | $P_{3\text{MHz}} - 13.31\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 12.69\text{dB} - (\text{---})$ |
| 2dB | $P_{3\text{MHz}} - 9.31\text{dB} - (\text{---})$ | _____ dBm | $P_{3\text{MHz}} - 8.69\text{dB} - (\text{---})$ |

124 ohms, 10MHz, -3dBm to +13dBm

-hp- 3335A
Attenuator
Step

-hp- 3586B
Level Reading

Max.

| | | | |
|------|--|-----------|--|
| 18dB | $P_{10\text{MHz}} - 25.46\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 24.54\text{dB} - (\text{---})$ |
| 10dB | $P_{10\text{MHz}} - 17.46\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 16.54\text{dB} - (\text{---})$ |
| 6dB | $P_{10\text{MHz}} - 13.46\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 12.54\text{dB} - (\text{---})$ |
| 2dB | $P_{10\text{MHz}} - 9.46\text{dB} - (\text{---})$ | _____ dBm | $P_{10\text{MHz}} - 8.54\text{dB} - (\text{---})$ |


HALF-POWER BANDWIDTHS (4-23)

| Bandwidth | Min (Hz) | - 3dB Bandwidth | Max (Hz) |
|-----------|----------|-----------------|----------|
| 20Hz | 18 | _____ Hz | 22 |
| 400Hz | 360 | _____ Hz | 440 |
| 1740Hz | 1566 | _____ Hz | 1914 |
| 2000Hz | 1800 | _____ Hz | 2200 |
| 3100Hz | 2790 | _____ Hz | 3410 |


PASS BAND FLATNESS (4-25)

| Bandwidth | Below | Minimum Range | Above |
|-----------|----------|--------------------|----------|
| 20Hz | _____ Hz | - 3Hz to 3Hz | _____ Hz |
| 400Hz | _____ Hz | - 50Hz to 50Hz | _____ Hz |
| 1740Hz | _____ Hz | - 550Hz to 550Hz | _____ Hz |
| 2000Hz | _____ Hz | - 650Hz to 650Hz | _____ Hz |
| 3100Hz | _____ Hz | - 1000Hz to 1000Hz | _____ Hz |

400Hz FILTER SHAPE (4-27)

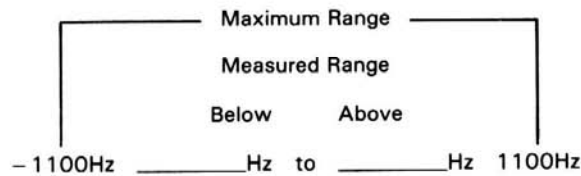

PILOT FILTER (20Hz) SHAPE (4-29)

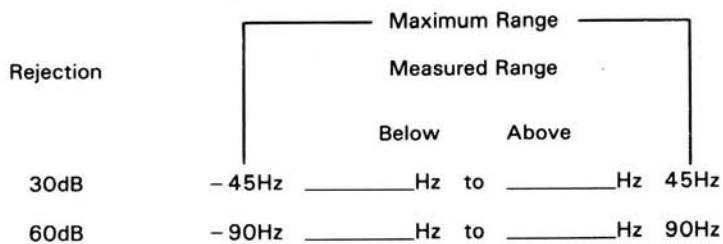

CARRIER REJECTION (4-31)

| Bandwidth | Below 1MHz Reading | Above 1MHz Reading | Max Level Reading |
|---------------------------------|--------------------|--------------------|-------------------|
| 3100Hz, 2000Hz, or 1740Hz | _____ dBm0 | _____ dBm0 | - 60dBm0 |

ADJACENT CHANNEL REJECTION (4-33)

| Bandwidth | Below 1MHz Reading | Above 1MHz Reading | Max Level Reading |
|---------------------------------|--------------------|--------------------|-------------------|
| 3100Hz, 2000Hz, or 1740Hz | _____ dBm0 | _____ dBm0 | - 75dBm0 |

RESIDUAL NOISE (4-35)

| | Bandwidth | Noise | Max Noise |
|--|-----------|-----------|-----------|
| 75 Ω , 32.495MHz | Widest | _____ dBm | - 116dBm* |
| | 400Hz | _____ dBm | - 120dBm |
| | 20Hz | _____ dBm | - 120dBm |
| 124 Ω , 9.995MHz | Widest | _____ dBm | - 116dBm |
| | 400Hz | _____ dBm | - 120dBm |
| | 20Hz | _____ dBm | - 120dBm |
| 135 Ω , 150 Ω , 0.995MHz | Widest | _____ dBm | - 116dBm |
| | 400Hz | _____ dBm | - 120dBm |
| | 20Hz | _____ dBm | - 120dBm |

* - 114dBm for a 3586C.

| | | | |
|------------------------|--------|-----------|----------|
| 75 Ω , 8.01kHz | Widest | _____ dBm | - 105dBm |
| | 400Hz | _____ dBm | - 105dBm |
| | 20Hz | _____ dBm | - 105dBm |
| 124 Ω , 8.01kHz | Widest | _____ dBm | - 105dBm |
| | 400Hz | _____ dBm | - 105dBm |
| | 20Hz | _____ dBm | - 105dBm |
| 135 Ω , 8.01kHz | Widest | _____ dBm | - 105dBm |
| | 400Hz | _____ dBm | - 105dBm |
| | 20Hz | _____ dBm | - 105dBm |

| | | | |
|---------------|--------|-----------|----------|
| 150Ω, 8.01kHz | Widest | _____ dBm | - 105dBm |
| | 400Hz | _____ dBm | - 105dBm |
| | 20Hz | _____ dBm | - 105dBm |
| 600Ω, 8.01kHz | Widest | _____ dBm | - 105dBm |
| | 400Hz | _____ dBm | - 105dBm |
| | 20Hz | _____ dBm | - 105dBm |

RESIDUAL SPURIOUS RESPONSES (4-37)

| Frequency | Level Reading | Max |
|--------------|---------------|-------------|
| 300Hz | _____ dBm | - 100dBm |
| 360Hz, 350Hz | _____ dBm | - 115dBm * |
| 420Hz, 400Hz | _____ dBm | - 115dBm * |
| 100kHz | _____ dBm | - 115dBm * |
| 200kHz | _____ dBm | - 115dBm * |
| 300kHz | _____ dBm | - 115dBm * |
| 400kHz | _____ dBm | - 115dBm * |
| 10MHz | _____ dBm | - 115dBm * |
| 20MHz | _____ dBm | - 115dBm * |
| 30MHz | _____ dBm | - 115dBm * |
| 60Hz, 50Hz | _____ dBm | - 100dBm ** |
| 120Hz, 100Hz | _____ dBm | - 100dBm ** |
| 180Hz, 250Hz | _____ dBm | - 100dBm ** |
| 240Hz, 200Hz | _____ dBm | - 100dBm ** |
| 250Hz | _____ dBm | - 100dBm ** |

* - 110dBm for 3586C

** - 95dBm for 3586C

SPURIOUS RESPONSES WITH INPUT (4-39)

| Input Images | Level Reading | Max |
|---------------------------------|---------------|---------|
| 1MHz | _____ dBm | - 80dBm |
| 30MHz | _____ dBm | - 80dBm |
| IF Images | | |
| 1MHz | _____ dBm | - 80dBm |
| 30MHz | _____ dBm | - 80dBm |
| Non-Harmonically Related Images | | |
| 31999850Hz | _____ dBm | - 75dBm |
| 31990000.1Hz | _____ dBm | - 80dBm |

HARMONIC DISTORTION (4-41)

| | Harmonic | Level Reading | Max |
|------------|--------------|---------------|----------|
| 75Ω | 200kHz (2nd) | _____ dBm | - 70dBm* |
| | 300kHz (3rd) | _____ dBm | - 70dBm* |
| | 20MHz (2nd) | _____ dBm | - 70dBm* |
| | 30MHz (3rd) | _____ dBm | - 70dBm* |
| 600Ω | 200kHz (2nd) | _____ dBm | - 70dBm* |
| | 300kHz (3rd) | _____ dBm | - 70dBm* |
| 150Ω, 135Ω | 200kHz (2nd) | _____ dBm | - 70dBm |
| | 300kHz (3rd) | _____ dBm | - 70dBm |
| 124Ω | 20MHz (2nd) | _____ dBm | - 70dBm |
| | 30MHz (3rd) | _____ dBm | - 70dBm |

* - 75dBm for 3586C

INTERMODULATION DISTORTION (4-43)

| | Level Reading | Max |
|-------------------|---------------|----------|
| 75Ω, Δ = 1MHz | | |
| 1MHz | _____ dBm | - 75dBm* |
| 17MHz | _____ dBm | - 75dBm* |
| 10MHz | _____ dBm | - 75dBm* |
| 7MHz | _____ dBm | - 75dBm* |
| 75Ω, Δ = 7kHz | | |
| 7kHz | _____ dBm | - 70dBm |
| 21.007MHz | _____ dBm | - 70dBm |
| 20.986MHz | _____ dBm | - 70dBm |
| 600Ω, Δ = 99.8kHz | | |
| 99.8kHz | _____ dBm | - 75dBm* |
| 100.2kHz | _____ dBm | - 75dBm* |
| 199.8kHz | _____ dBm | - 75dBm* |
| 600Ω, Δ = 7kHz | | |
| 7kHz | _____ dBm | - 70dBm |
| 107kHz | _____ dBm | - 70dBm |
| 193kHz | _____ dBm | - 70dBm |
| 86kHz | _____ dBm | - 70dBm |

150Ω, 135Ω, Δ = 990kHz

| | | |
|---------|-----------|----------|
| 990kHz | _____ dBm | - 75dBm* |
| 1.01MHz | _____ dBm | - 75dBm* |
| 1.99MHz | _____ dBm | - 75dBm* |

150Ω, 135Ω, Δ = 7kHz

| | | |
|----------|-----------|---------|
| 7kHz | _____ dBm | - 70dBm |
| 1.993MHz | _____ dBm | - 70dBm |
| 1.007MHz | _____ dBm | - 70dBm |
| 986kHz | _____ dBm | - 70dBm |

124Ω, Δ = 1MHz

| | | |
|-------|-----------|----------|
| 1MHz | _____ dBm | - 75dBm* |
| 17MHz | _____ dBm | - 75dBm* |
| 10MHz | _____ dBm | - 75dBm* |
| 7MHz | _____ dBm | - 75dBm* |

124Ω, Δ = 7kHz

| | | |
|-----------|-----------|---------|
| 7kHz | _____ dBm | - 70dBm |
| 17.993MHz | _____ dBm | - 70dBm |
| 9.007MHz | _____ dBm | - 70dBm |
| 8.986MHz | _____ dBm | - 70dBm |

* - 78dBm for a 3586C

IF REJECTION (4-45)

| IF Frequency | Level Reading | Max |
|--------------|---------------|---------|
| 50MHz | _____ dBm | - 60dBm |
| 15625Hz | _____ dBm | - 80dBm |

WIDE BAND POWER FLATNESS (4-47)

| Frequencies | Min | Level Reading | Max |
|-----------------|-----------|---------------|-----------|
| 20kHz and 10MHz | - 0.8dBm0 | _____ dBm0 | + 0.8dBm0 |
| 200Hz and 32MHz | - 1.8dBm0 | _____ dBm0 | + 1.8dBm0 |
| 20kHz and 10MHz | - 0.8dBm0 | _____ dBm0 | + 0.8dBm0 |
| 200Hz and 32MHz | - 1.8dBm0 | _____ dBm0 | + 1.8dBm0 |

TRACKING OUTPUT TEST (4-49)

| | Min | Level Reading | Max |
|-----------------|-----------|---------------|-----------|
| Absolute level | -0.50dBm | _____ dBm | +0.50dBm |
| Flatness, 200Hz | -0.50dBm0 | _____ dBm0 | +0.50dBm0 |
| 500kHz | -0.50dBm0 | _____ dBm0 | +0.50dBm0 |
| 32.5MHz | -0.50dBm0 | _____ dBm0 | +0.50dBm0 |

PHASE JITTER ACCURACY (OPT. 003 ONLY) (4-51)

| Min | ϕ Jitter Reading | Max |
|---------|-----------------------|---------|
| 10° p-p | _____ °p-p | 13° p-p |

RESIDUAL PHASE JITTER (OPT. 003 ONLY) (4-53)

| Frequency | Residual Phase Jitter | Max |
|-----------|-----------------------|----------|
| 48996Hz | _____ °p-p | 0.5° p-p |
| 1998996Hz | _____ °p-p | 0.5° p-p |

WTD FILTER (OPT. 003 ONLY) (4-55)

| Min | Level Reading | Max |
|-----------|---------------|-----------|
| -0.50dBm0 | _____ dBm0 | +0.50dBm0 |

NOTCH FILTER (OPT. 003 ONLY) (4-57)

| SSB Channel Frequency | Level Reading | Max |
|-----------------------|---------------|---------|
| 1010Hz | _____ dBm0 | -50dBm0 |
| 995Hz | _____ dBm0 | -50dBm0 |
| 1025Hz | _____ dBm0 | -50dBm0 |

IMPULSE NOISE (4-59)

| 1700Hz Tone | Min | Counts/Min | Max |
|---------------------|-----|------------|-----|
| Threshold - 1dB | 0 | _____ | 1 |
| Threshold + 1dB (A) | 458 | _____ | 504 |
| Threshold + 1dB (B) | 400 | _____ | 442 |

WARNING

Maintenance described herein is performed with power supplied to the instrument, and protective covers removed. Such maintenance should be performed only by service-trained personnel who are aware of the hazards involved (for example, fire and electrical shock). Where maintenance can be performed without power applied, the power should be removed.

Table of Contents

| Paragraph | Page |
|-----------|---|
| 5-1. | Introduction 5-1 |
| 5-3. | A80 Power Supplies 5-1 |
| 5-4. | A40 Frequency Reference Adjustment 5-1 |
| 5-5. | Fractional-N Loop Adjustments 5-1 |
| 5-6. | Step and Sum Loop Adjustments 5-3 |
| 5-7. | Second Local Oscillator (A11) Adjustments 5-6 |
| 5-8. | A22 A/D Converter 5-6 |
| 5-9. | A21 Logger and IF Gain 5-7 |
| 5-10. | A20, A10 Bandwidth Filter Adjust- ments 5-9 |
| 5-11. | A20 Bandwidth Gain 5-19 |
| 5-12. | A5 50MHz Rejection 5-20 |
| 5-13. | A5 Low-Pass Filter Flatness 5-21 |
| 5-14. | A5, A10 50MHz Crystal Filter 5-22 |
| 5-15. | A10 Mixer Gain Adjust 5-24 |
| 5-16. | A5 LO Rejection 5-25 |
| 5-17. | A2 Input Amplifier and A1 Input Multiplexer Adjustments 5-25 |
| 5-18. | A1, A2 Frequency Response (Balanced Inputs) 5-27 |
| 5-19. | Intermodulation Distortion Adjustment . . 5-29 |
| 5-20. | A4 Broadband Power/Overload/ Calibration Adjustments 5-29 |
| 5-21. | A15 Tracking Output Adjustment 5-32 |
| 5-22. | A70 Impairments (Option 003 Only) 5-32 |
| 5-23. | A16 10MHz Frequency Reference Adjustments (Option 004 Only) 5-35 |

SECTION V ADJUSTMENTS

5-1. INTRODUCTION.

5-2. This section consists of the adjustment procedures for the -hp- 3586A/B/C. Appropriate adjustments will be necessary after repair of the instrument and/or replacement of components. These procedures may also be followed for periodic maintenance or if the instrument has failed a performance test. See Figure 5-6 for adjustment locations.

5-3. A80 POWER SUPPLIES.

- a. Connect the 3455A to A80TP1 (+ 12 volts); configure it to measure dc.
- b. Check that the + 12, - 12, and + 5 volt green L.E.D.'s are on.
- c. Adjust A80R15 such that the 3455A reads from + 11.990 volts dc to + 12.010 volts dc.
- d. Check that A80TP2 is - 12 volts dc $\pm 30\text{mV}$.
- e. Check that A80TP3 is + 5.250 volts dc $\pm 100\text{mV}$.
- f. If either d or e are false, then repeat Steps c through e as necessary.

5-4. A40 FREQUENCY REFERENCE ADJUSTMENT.

- a. Allow at least 10 minutes after instrument turn-on for the A40 Frequency Reference Assembly to stabilize.
- b. Put the A40 board on two 15 pin extender boards.
- c. Disconnect the red cable from A40J1.
- d. Connect a frequency counter to A40J6.
- e. Short A40TP4 to A40TP5. Adjust A40R78 for a frequency reading on the counter of $50.000000\text{MHz} \pm 10\text{Hz}$.
- f. Remove the short between A40TP4 & A40TP5. Install the A40 board in its position and reconnect the red cable to A40J1.

5-5. FRACTIONAL N LOOP ADJUSTMENTS.

NOTE

Adjust the A40 Frequency Reference Assembly (if necessary) before making adjustments of the Fractional N Loop.

- a. A31 Fractional-N VCO Adjustments.
1. Place A31 on a 15 pin extender board.
 2. Connect an oscilloscope probe (10:1) to A32TP2.
 3. Tune the 3586 to 1.9999999MHz. Enter a FREQ STEP of 0.2Hz.
 4. Measure and record the DC voltage at the junction of A31CR2 and A31R2.
 5. Connect a DC voltmeter to A31TP3.
 6. Adjust A31L4 so that the DC voltmeter reading is within $\pm 0.02V$ of the reading recorded in Step 4.
 7. Step the 3586 tuned frequency up by 0.2Hz to 2.0000001MHz.
 8. Adjust A31R4 for a DC voltmeter reading of $0V \pm 0.02V$ at A31TP3.
- b. A32 Fractional-N Phase Detector Adjustments.
1. Put the A32 assembly on a 22 pin extender board.
 2. Tune the 3586 to 9.97kHz. Disable the 3586 Autocalibration.
 3. Set the spectrum analyzer to:

| | | |
|------------------|---|------------|
| Center Frequency | = | 39.8994MHz |
| Frequency Span | = | 2kHz |
| Resolution BW | = | 30Hz |
| Video BW | = | 100Hz |
 4. Connect the "20-40MHz" test point, A31TP1, to the 50Ω input of the spectrum analyzer. Adjust the level controls of the spectrum analyzer so the largest signal component (the carrier) is at full scale on the spectrum analyzer display.
 5. After the spectrum analyzer has made 2 complete sweeps, reduce its Video BW to 3Hz.
 6. Adjust A32R51 (API 1) to null the first sideband below the carrier (this sideband is 300Hz below the carrier). This sideband should be at least 72dB below the carrier.
 7. Set the spectrum analyzer to the conditions of step (3).

NOTE

If using the 3585A Spectrum Analyzer, it is useful to make an off-set measurement from the carrier, followed by use of manual sweep at the sideband.

8. Tune the 3586 to 9.997kHz.
9. After the spectrum analyzer has made two complete sweeps, reduce its Video BW to 3Hz.
10. Adjust A32R54 (API 2) to null the first sideband below the carrier (this sideband is 300Hz below the carrier). This sideband should be at least 72dB below the carrier. (If using a 3585A Spectrum Analyzer, refer to the note in Step 7.)
11. Set the spectrum analyzer to the conditions of step (3).
12. Tune the 3586 to 9999.9Hz.
13. After the spectrum analyzer has made two complete sweeps, reduce its Video BW to 3Hz.
14. Adjust A32R61 (API 4) to null the first sideband below the carrier (this sideband is 1kHz below the carrier). This sideband should be at least 72dB below the carrier. (If using a 3585A Spectrum Analyzer, refer to the note in Step 7).
15. Put the A32 Assembly in its place in the card nest, with the 8 screws holding it in place.
16. Tune the 3586 to 1.999970MHz.
17. Set the spectrum analyzer to:

| | | |
|------------------|---|------------|
| Center Frequency | = | 19.9994MHz |
| Frequency Span | = | 2kHz |
| Video BW | = | 100Hz |
| Resolution BW | = | 30Hz |

18. After the spectrum analyzer has made two complete sweeps, reduce its Video BW to 10Hz.
19. Measure the highest spur below the carrier; it should be at least 72dB below the carrier. If it is not, adjust A32R51 (API 1) until it is. (If using a 3585A Spectrum Analyzer, refer to the note in Step 7). If this adjustment is necessary, recheck Steps 2 through 6 and readjust the spur to a level at least 72dB below the carrier if necessary; then recheck steps 15 through 19 and readjust the spurs to a level at least 68dB below the carrier.

5-6. STEP & SUM LOOP ADJUSTMENTS.

NOTE

Make any necessary adjustments to the Fractional N Loop (A31 & A32 assemblies) and the Frequency Reference (A40) assembly before adjusting the Step & Sum Loop.

NOTE

The four varicaps on the A50 & A51 assemblies (A50 CR1, CR2 and A51CR1, CR2) are a matched set. If one of these two pairs of varicaps or one of the two boards are replaced, it will be necessary to replace the set of four varicaps (Part No. 0122-0098) and readjust both the A50 & A51 assemblies.

NOTE

The following adjustment is performed with A50 on an extender board.

- a. Step Loop (A50) Adjustments.

NOTE

Steps 1 through 5 make the VCO Frequency Adjustment.

1. Set A50S1 to the "T" (test) position.
2. Connect a frequency counter to A50J2.
3. Center the positions of A50R45 (FLATNESS) & A50R46 (GAIN).
4. Adjust A50L5 (FREQ) for a counter indication of 54.0MHz \pm 0.1MHz.
5. Set A50S1 to the "N" (normal) position.

NOTE

Steps 6 through 12 make the VCO Flatness Adjustment.

NOTE

Move cable W11 from A50J1 to A50J2 for the following adjustment.

6. Connect the power meter to A50J1.
7. Tune the 3586 to 31.0MHz and enter a FREQ STEP of 30.0MHz (CAL off).
8. With the 3586 tuned to 31.0MHz (A50J1 will be at 84.0MHz), adjust A50R46 (Gain) for a reading of $-6.0\text{dBm} \pm 1\text{dB}$ on the power meter.
9. Step the tuned frequency of the 3586 down to 1.0MHz (A50J1 will be at 54.0MHz). Adjust A50R45 (Flatness) for a reading of $-6.0\text{dBm} \pm 1\text{dB}$ on the power meter.
10. Step the tuned frequency of the 3586 back up to 31.0MHz.
11. Repeat Steps 8 and 9 until both conditions are met.
12. Repeat Steps 1 through 5 if necessary.

NOTE

The following adjustment is performed with A51 on an extender board.

b. Sum Loop VCO (A51) Adjustments.**NOTE**

The four varicaps on the A50 & A51 assemblies (A50 CR1, CR2 and A51CR1, CR2) are a matched set. If one of these two pairs of varicaps or one of the two boards are replaced, it will be necessary to replace the set of four varicaps (Part No. 0122-0098) and readjust both the A50 & A51 assemblies.

NOTE

Steps 1 through 4 make the VCO Frequency Adjustment.

1. Center the positions of A51R55 (flatness) and A51R56 (gain). Set A51S1 to the "T" (test) position.
2. Connect a frequency counter to A51J2.
3. Adjust A51L8 for a counter reading of 52.0MHz \pm 0.1MHz.
4. Return A51S1 to the "N" (normal) position.

NOTE

Steps 5 through 11 make the VCO Flatness Adjustment.

5. Connect the power meter to A51J1. Connect A51J2 to A52J2.
6. Tune the 3586 to 32.0MHz (A51J1 will be at 82.0MHz). Enter a FREQ STEP of 30.0MHz.
7. Adjust A51R56 (Gain) for a reading of $-6.0\text{dBm} \pm 1\text{dB}$ on the power meter.
8. Step the tuned frequency of the 3586 down to 2.0MHz (A51J2 will be at 52.0MHz).
9. Adjust A51R55 (Flatness) for a reading of $-6.0\text{dBm} \pm 1\text{dB}$ on the power meter.
10. Repeat Steps 7 through 9 until both conditions are met.
11. Repeat Steps 1 through 4 if necessary.
12. Connect A51J1 to A52J2.

- c. Sum Phase Detector (A53) Adjustments.
 1. Tune the 3586 to 27.990MHz. Enter a FREQ STEP of 26.0MHz.
 2. Connect a DC voltmeter to A53TP2 (TRACKING).
 3. Adjust A53R13 (OFFSET) for a DC voltmeter reading of $0.0V \pm 0.05V$.
 4. Step the tuned frequency of the 3586 down to 1.990MHz.
 5. Adjust A53R3 (GAIN) for a DC voltmeter reading of $0.0V \pm 0.05V$.
 6. Repeat Steps 1 through 5 until both conditions are met.
 7. With the 3586 tuned to 1.990MHz, enter a FREQ STEP of 2.0MHz.
 8. Step the tuned frequency of the 3586 in 2.0MHz increments from 1.990MHz to 27.990MHz. The reading of the DC voltmeter (A53TP2) should be $0.0V \pm 0.2V$ at each step. After Steps 1 through 5 are first performed, A53R13 (OFFSET) may be adjusted (if necessary) so that the DC voltage at A53TP2 is $0.0V \pm 0.2V$ at each 2MHz step.

5-7. SECOND LOCAL OSCILLATOR (A11) ADJUSTMENTS.

NOTE

Make any necessary adjustments to the Frequency Reference Assembly (A40) before adjusting the Second L.O. Specifically, verify the 50MHz at A40J6 is $\pm 10Hz$ with no external reference.

- a. Connect a DC voltmeter to A11TP2.
- b. Adjust A11L22 so the DC voltage at A11TP2 is $-1.80V \pm 0.2V$. (The "UNLOCK" light should be off.)

5-8. A22 A/D CONVERTER.

NOTE

Steps a through f adjust the counter VCO.

- a. Place A22 board on an extender board and remove the A21 board.
- b. With the 3335A, apply 15625Hz at -30dBm across edge connector pins A8 (IF input) and A13 (ground) of the A22 board. (As an alternative, it may be more convenient to apply 15625Hz to C1 on the lead closest to the edge connector contacts.)
- c. Apply approximately -1V to A22U7 pin 4 with respect to ground. This can be furnished by a power supply such as the -hp- 6213A.

- d. Connect the oscilloscope to A22TP3. The scope should be adjusted so that it is dc-coupled, and the display (with no input) is vertically centered on the scale.
- e. Adjust A22R6 such that the square wave is centered with respect to ground.
- f. Disconnect the 3335A and the oscilloscope.

NOTE

Steps g through m adjust the Amplitude Display.

- g. On the 3586A/B/C, press: RECALL, • , RDNG→OFFSET, 5.
- h. Connect the 3455A across A22TP1 and A22TP2.
- i. Adjust A22R21 so the front panel measurement reads the same as that of the 3455A ± 3 counts.
- j. Apply -0.5 volts dc to A22 pin A2 with respect to A22 pin A3 (ground).
- k. Repeat Step i.
- l. Repeat Step c.
- m. Repeat Steps i through l until no further adjustment is necessary. Remember to place the A22 board back into the instrument after the adjustment is completed.

5-9. A21 LOGGER AND IF GAIN.**NOTE**

The A21 board must be allowed to warm up for 10 to 15 minutes.

NOTE

Steps a through d adjust the Mixer Balance.

- a. Remove the A20 board from the instrument and replace it with an extender board. Put the A21 board on an extender.
- b. Connect a scope to A21TP6.
- c. Adjust A21R44 (MIXER BAL) for minimum AC on the scope.
- d. Disconnect the scope.

NOTE

Steps e through l adjust the 10dB range.

- e. Connect the -hp- 3335A 50Ω output (no termination) across edge connector pins 21 (A or B) and 22 (ground) of A21. Monitor the AC voltage of the 3335A using an -hp- 3455A. (As an alternative, it may be easier to connect the 3335A to the bottom lead of R2 instead of pin 21.)

- f. Set the output of the 3335A to 15625Hz at +10.95dBm. Step the output amplitude of the 3335 by 0.01dB until the 3455A reads 1.581 volts ac.
- g. On the -hp- 3586A/B/C, select ENTRY 10 and enter a full scale of +20dBm. Press MEAS CONT. Turn CAL off. Press RECALL, ●, CNTR→FREQ, O.
- h. Adjust A21R23 (10dB offset) such that the 3586A/B/C reads a level from +19.99dBm to +20.01dBm.
- i. Step the amplitude of the 3335 down by 10dB.
- j. Adjust A21R19 (10dB gain) such that the 3586A/B/C reads a level from +9.99dBm to +10.01dBm.
- k. Step the amplitude of the 3335 up by 10dB.
- l. Repeat Steps h through k until no further adjustment is necessary.

NOTE

Steps m through u adjust the 100dB Range.

- m. Set the amplitude of the 3335A such that the 3586A/B/C reads +20.00dBm ($\pm .01$ dB).
- n. Enter an amplitude step of 60dB into the 3335A.
- o. On the 3586A/B/C, select ENTRY 100 and press: RECALL, ●, CNTR→FREQ, 2.
- p. Adjust A21R25 (100dB offset) such that the 3586A/B/C reads a level from +19.99dBm to +20.01dBm.
- q. Step the amplitude of the 3335A down by 60dB.
- r. Adjust A21R28 (100dB gain) such that the 3586A/B/C reads a level from -39.99dBm to -40.01dBm.
- s. Step the amplitude of the 3335A up by 60dB.
- t. Repeat Steps p through s until no further adjustment is needed.
- u. Repeat Steps f through t until no further adjustment is needed.

NOTE

Steps v through aa adjust the Meter calibration.

- v. Connect the 3455A to the meter output on the rear panel; configure it to read dc volts.
- w. Select ENTRY 10 on the 3586A/B/C. Given the equipment set-up for the preceding steps, adjust the 3335A amplitude so that the 3586A/B/C reads from +19.99dBm to +20.01dBm.

- x. Adjust A21R96 (METER 0dB CAL) such that the 3455A reads from -0.001Vdc to $+0.001\text{Vdc}$.
- y. This represents a full scale reading; the meter should be at zero.
- z. Adjust the meter's mechanical zero if necessary.
- aa. Disconnect the 3335A from the extender board, remove the extender board, and place A20 and A21 back into the instrument.

5-10. A20, A10 BANDWIDTH FILTER ADJUSTMENTS.

NOTE

Before making any bandwidth adjustments, adjust A21R44 (MIXER BAL) per paragraph 5-9.

a. Bandwidth Adjustments Set-up.

- 1. Place A10 and A20 on extender boards. Remove the jumper wire (A10J1) from A10TP1.
- 2. Connect the 3585A tracking generator output across edge connector pins A12 and A11 (ground) of 03586-66510.
- 3. Set the 3586A/B/C to ENTRY 100.

NOTE

Follow Steps 4-16 for 3100Hz bandwidth adjustment procedures, 17-27 for 2000Hz bandwidth adjustment procedures, and 28-38 for 1740Hz bandwidth adjustment procedures.

3100Hz BW-03586-66523

- 4. On the 3585A, set:

| | |
|------------------|-----------|
| Center Frequency | 15.849kHz |
| Span | 4000Hz |
| RBW | 30Hz |
| VBW | 100Hz |

- 5. Connect the 3585A 1MΩ input to A20TP12. Adjust A20L51 for a null on the 3585 display.
- 6. Connect the 3585A to A20TP13. Set the 3585A center frequency to 20.593kHz. Adjust A20L52 for a null on the display.
- 7. Set the center frequency to 12.883kHz. Adjust A20L53 for a null on the display.

8. Connect the 3585A to A20TP14. Connect a jumper between TP12 and TP13. Set the 3585A center frequency to 18.350kHz and adjust A20L54 for a null on the display.
9. Set the center frequency to 13.505kHz and adjust A20L55 for a null on the display.
10. Connect the 3585A to A20TP15. Connect a jumper between TP12 and TP14. Set the center frequency to 17.742kHz and adjust A20L56 for a null on the display.
11. Set the center frequency to 13.734kHz and adjust A20L57 for a null on the display.
12. Connect the 3585A to A20TP16. Connect the jumper between TP12 and TP15. Set the center frequency to 17.516kHz and adjust L58 for a null on the display.
13. Set the center frequency to 13.816kHz and adjust L59 for a null on the display.
14. Connect the 3585A to A20J2. Connect the jumper between TP12 and TP16. Set the center frequency to 17.434kHz and adjust A20L60 for a null on the display.
15. Set the center frequency to 9.968kHz and adjust A20L61 for a null on the display.
16. Disconnect the jumper and proceed to Step b.
2000Hz BW - 03586-66520
17. On the 3585A, set:

| | |
|------------------|-----------|
| Center Frequency | 19.702kHz |
| Span | 4000Hz |
| RBW | 30Hz |
| VBW | 100Hz |
18. Connect the 3585A 1M Ω input to A20TP12. Adjust A20L51 for a null on the 3585A display.
19. Connect the 3585A to A20TP13. Set the 3585A center frequency to 17.122kHz and adjust A20L52 for a null on the display.
20. Set the center frequency to 14.124kHz and adjust A20L53 for a null on the display.
21. Connect the 3585A to A20TP14. Connect a jumper between TP12 and TP13. Set the 3585A center frequency to 17.240kHz and adjust A20L54 for a null.
22. Set the center frequency to 13.968kHz and adjust A20L55 for a null.

- 23. Connect the 3585A to A20TP15. Connect the jumper between TP12 and TP14. Set the center frequency to 17.651kHz and adjust A20L56 for a null.
- 24. Set the center frequency to 13.327kHz and adjust A20L57 for a null.
- 25. Connect the 3585A to A20J2. Connect the jumper between TP12 and TP15. Set the center frequency to 19.685kHz and adjust A20L58 for a null.
- 26. Set the center frequency to 15.736kHz. Connect the jumper between TP12 and TP9 and adjust for a null.
- 27. Disconnect the jumper and proceed to Step b.

1740Hz Bandwidth - 03586-66524

- 28. On the 3585A, set:

| | |
|------------------|-----------|
| Center Frequency | 19.106kHz |
| Span | 4000Hz |
| RBW | 30Hz |
| VBW | 100Hz |

- 29. Connect the 3585A 1MΩ input to A20TP12. Adjust A20L51 for a null on the 3585A display.
- 30. Connect the 3585A to A20TP13. Set the 3585A center frequency to 16.985kHz. Adjust A20L52 for a null on the display.
- 31. Set the center frequency to 14.275kHz. and adjust A20L53 for a null.
- 32. Connect the 3585A to A20TP14. Connect a jumper between TP12 and TP13. Set the 3585A center frequency to 17.105kHz and adjust A20L54 for a null.
- 33. Set the center frequency to 14.138kHz and adjust A20L55 for a null.
- 34. Connect the 3585A to A20TP15. Connect the jumper between TP12 and TP14. Set the center frequency to 17.587kHz and adjust A20L56 for a null.
- 35. Set the center frequency to 13.594kHz and adjust A20L57 for a null.
- 36. Connect the 3585A to A20J2. Connect the jumper between TP12 and TP15. Set the center frequency to 18.911kHz and adjust A20L58 for a null.
- 37. Set the center frequency to 15.738kHz. Connect the jumper between TP12 and TP9. Adjust A20L59 for a null.
- 38. Disconnect the jumper and proceed to Step b.

b. 3100Hz, 2000Hz, 1740Hz Flatness Adjust.

- 1. Using a 10:1 probe, connect the 3585A (via the 1MΩ input) to A20TP11.

2. Set the 3585A controls as follows:

- a. Press: "MANUAL"
- b. Range - 5dB
- c. db/div 2dB
- d. Center Frequency 15.625kHz
- e. Frequency Span 3kHz
- f. RBW 100Hz
- g. VBW 100Hz
- h. Sweep Time 2 sec
- i. Impedance 1M Ω
- j. AUTO RANGE (off)
- k. REF LVL TRACK (on)
- l. Press: "CONT"
- m. Press: "REF LVL"
- n. Adjust Continuous Entry knob to center display
- o. Press: "MANUAL"; enter 14.425kHz (3100Hz BW) 14.825kHz (2000Hz BW) 14.900kHz (1740Hz BW)
- p. Press: "OFFSET"; "Enter Offset"
- q. Press "MANUAL"; enter 16.825kHz (3100Hz BW) 16.425kHz (2000Hz BW) 16.350kHz (1740Hz BW)
- r. Press: "CONT"
- s. Press: "SAVE"; "1"

NOTE

The 3585A must be internally set for a gain 10 times greater than displayed at 2dB/div. All amplitudes need to be divided by 10.

- c. Adjust A20L91 (Lower Band Edge Flatness) and A20L92 (Upper Band Edge Flatness) for the shape as shown in Figure 5-1.

- d. Adjust A20L51 and A20L59 (A20L61 for 03586-66523) for the flatness limit given for the corresponding bandwidth below. Figure 5-1 shows how the filter shape should look when the flatness is adjusted to within the specified limits.

3100Hz: $\pm 0.3\text{dB} \pm 1200\text{Hz}$ from Center Frequency

2000Hz: $\pm 0.3\text{dB} \pm 800\text{Hz}$ from Center Frequency

1740Hz: $\pm 0.3\text{dB} \pm 725\text{Hz}$ from Center Frequency

NOTE

The oscillogram shown in Figure 5-1 is from an instrument with a 3100Hz bandwidth. The filter shape is the same for all bandwidths.

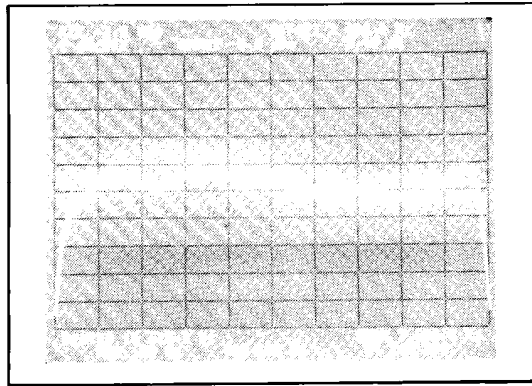


Figure 5-1. Flatness Adjust ($\pm 0.3\text{dB}$).

- e. **3100Hz, 2000Hz, 1740Hz 3dB Bandwidth Checks.**
- f. On the 3585A, press “RECALL”, “1” to restore the instrument parameters stored in Step b-2. To this setup, make the following changes:

| | |
|--|----------------|
| dB/div | 1dB |
| Frequency Span | 4kHz |
| Sweep Time | 2.8s |
| Press: | “Enter Offset” |
| Press: | “Offset” |
| Set the marker to the center frequency (15.625kHz) | |
| Press: | “Offset” |
| Press: | “Enter Offset” |

- g. Turn the Continuous Entry knob to the left until the offset reads approximately -3dB .
Press “Enter Offset”.
- h. Turn the Continuous Entry knob to the right until the offset reads approximately 0dB . Note the offset frequency and insure that it falls within the limit corresponding to the bandwidth given below. Figure 5-2 shows how the filter shape should look when the 3dB bandwidth is within the specified limits.

3dB Bandwidth 3100Hz:

2945Hz to 3255Hz

3dB Bandwidth 2000Hz:

1900Hz to 2100Hz

3dB Bandwidth 1740Hz:

1653Hz to 1827Hz

NOTE

The oscillogram shown in Figure 5-2 is from an instrument with a 3100Hz bandwidth.

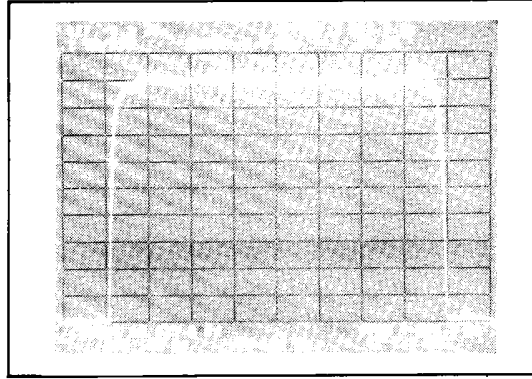


Figure 5-2. 3dB Bandwidth Check.

i. **3100Hz, 2000Hz, 1740Hz 65 and 80dB Point Check.**

j. On the 3585A, set the following controls:

Frequency Span 6kHz

RBW 30Hz

Set the marker to the center frequency (15.625kHz)

Press: “Offset”

Press: “Enter Offset”

db/div 10

k. Turn the Continuous Offset Adjust to the frequency limits given for the corresponding bandwidth. Insure that the offset amplitude falls below the level specified.

3100Hz Bandwidth:

Offset Amplitude must be below -65dB for $3100\text{Hz} \pm 1850\text{Hz}$

Offset Amplitude must be below -80dB for $3100\text{Hz} \pm 2850\text{Hz}$

2000Hz Bandwidth:

Offset Amplitude must be below -65dB for $2000\text{Hz} \pm 1500\text{Hz}$

Offset Amplitude must be below -80dB for $2000\text{Hz} \pm 2500\text{Hz}$

1740Hz Bandwidth :

Offset Amplitude must be below -65dB for $1740\text{Hz} \pm 1350\text{Hz}$

Offset Amplitude must be below -80dB for $1740\text{Hz} \pm 2350\text{Hz}$

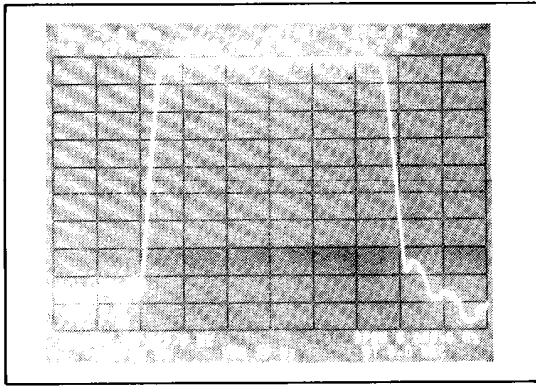


Figure 5-3A. Offset Amplitude Below -65dB (3100Hz BW).

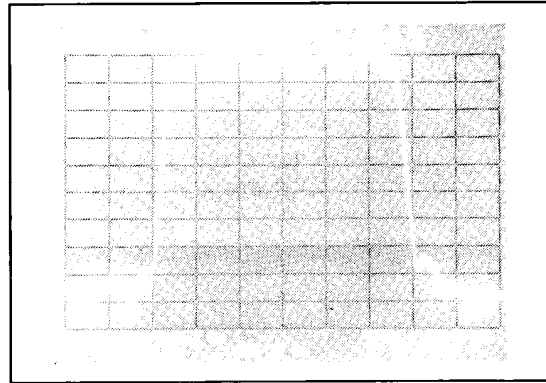


Figure 5-3B. Offset Amplitude Below -80dB (3100Hz BW).

l. 20Hz Bandwidth Adjustment.

m. Connect the 3585A 1MΩ input to A20TP4 using a 10:1 probe.

n. Set the 3585A as follows:

| | | |
|--------------------|------------------|-----------------------|
| | Press: | “Instr Preset” |
| Tracking Generator | Amplitude | Full Clockwise (0dBm) |
| | Center Frequency | 15.625kHz |
| | Frequency Span | 2.5kHz |
| | Marker | 15.625kHz |
| | Input | 1MΩ |
| | Auto Range | OFF |
| | Range | - 5dB |
| | REF LVL | - 7dBm |
| | Sweep Time | 12sec |
| | Press: | “Save”; “1” |

o. Short out the lower set of crystals (Y1/Y2).

p. Adjust the Continuous Entry knob until the marker is at 16.1kHz. Press “Man Sweep”.

q. Adjust A20C42 for a minimum level on the 3585A display.

r. Move the short to the upper set of crystals (Y3/Y4).

s. Press “Cont”. Wait one (1) sweep and press “Manual”.

t. Adjust A20C32 for a minimum level on the 3585A display.

u. Press “CONT”. Remove the short from the crystals.


- v. Set the 3585A as follows:

| | |
|-----------------|--------------------------|
| Press: | “Instr Preset” |
| Press: | “Recall”; “1” |
| Frequency Span | 25Hz |
| Reference Level | - 14dBm |
| dB/div | 2 |
| RBW | 10Hz |
| VBW | 100Hz |
| Sweep Time | 12.8sec |
| Press: | “Manual” enter 15.620kHz |
| Press: | “Enter Offset” |
| Press: | “Offset” |
| Press: | “Manual” |
| | enter 15.630kHz |
| Press: | “Cont” |
| Press: | “Ref Lvl” |

NOTE

The 3585A must be internally set for a gain 10 times greater than displayed a 2dB/div. All amplitudes need to be divided by 10.

- w. Turn the Continuous Entry knob to center the display on the screen.
- x. Adjust A20R35 (20Hz Ripple) and A20R40 (20Hz Tilt) for a flat top (see Figure 5-4A).
- y. Set dB/div to 1dB and measure the bandwidth using the procedures found in Steps g and h.
1. If the bandwidth is too wide, set the marker to the center frequency, press “Manual” and adjust A20R35 to move the marker up. Press “Cont” and retest.
 2. If the bandwidth is too narrow, set the marker to the center frequency, press “Manual” and adjust A20R35 to move the marker down. Press “Cont” and retest.

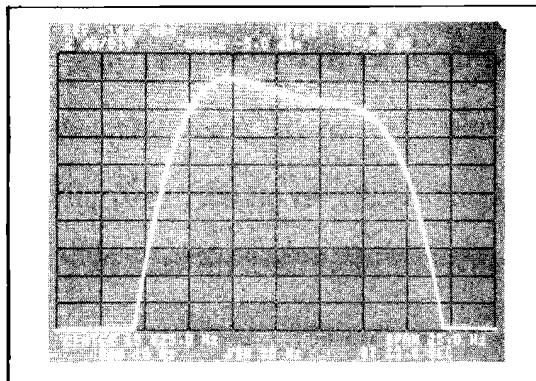

**Figure 5-4A. 20Hz Bandwidth Adjustment
($\pm 0.3\text{dB} \pm 5\text{Hz}$ from CF).**

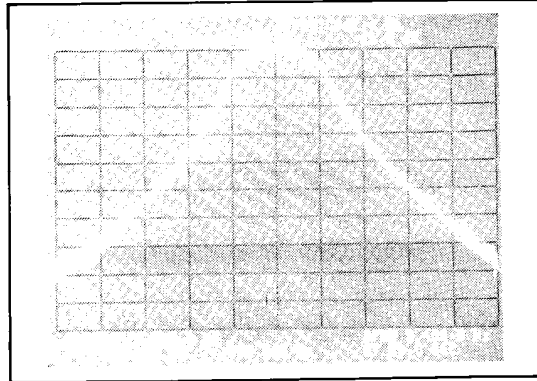


Figure 5-4B.

- z. Set the 3585A as follows:

| | |
|--------------------------------|-----------------|
| Press: | “Recall”; “1” |
| Frequency Span | 200Hz |
| Sweep Time | 20sec |
| Wait 1 full sweep | |
| Press: | “MKR → REF LVL” |
| dB/div | 10 |
| Set marker to center frequency | |
| Press | “Enter Offset” |
| Press | “Offset” |

- aa. Adjust the Continuous Entry knob for a frequency offset of $\pm 35\text{Hz}$. The dB offset must be more negative than -30dB .
- bb. Adjust the Continuous Entry knob for a frequency offset of $\pm 80\text{Hz}$. The dB offset must be more negative than -60dB . (See Figure 5-4B.)
- cc. Wax the A20 filter coils and place the A20 board back into the instrument.
- dd. **400Hz Bandwidth Adjustment.**
- ee. Connect the 3585A $1\text{M}\Omega$ input to the right side of A10C101 using a 10:1 probe.
- ff. Set the 3585A as follows:

| | |
|--|-------------------|
| Press: | “Instr Preset” |
| Tracking Generator Amplitude Full Clockwise (0dBm) | |
| Center Frequency | 14.242kHz |
| Frequency Span | 2kHz |
| Input | $1\text{M}\Omega$ |
| Auto Range | Off |
| Range | -25dBm |
| Reference Level | -30dBm |
| Sweep Manual | |

- gg. Select the 400Hz bandwidth on the 3586A/B/C.

- hh. Adjust A10L101 for a null.
- ii. Move the 10:1 probe to A10TP2. Place a shorting strip between the right side of A10C101 and TP1.
- jj. Set the center frequency on the 3585A to 17.324kHz. Adjust A10L102 for a null.
- kk. Set the center frequency of the 3585A to 14.4kHz and adjust A10L103 for a null.
- ll. Move the 10:1 probe to TP3. Connect the short between A10C101 and TP2.
- mm. Set the center frequency to 16.795kHz and adjust A10L104 for a null. Remove the short.

nn. Filter Shape and 3dB Points.


- oo. Set the 3585A as follows:

Press "Instr Preset"

| | |
|------------------|-----------------------------|
| Center Frequency | 15.625kHz |
| Frequency Span | 800Hz |
| Input | 1M Ω |
| Auto Range | Off |
| Range | - 5dB |
| dB/div | 1dB |
| RBW | 100Hz |
| VBW | 300Hz |
| Sweep Time | 5sec |
| Press: | "MKR \rightarrow REF LVL" |
| Press: | "Offset" |
| Press: | "Enter Offset" |

- pp. Turn the Continuous Entry knob until the marker is over - 200Hz. Press: "Enter Offset".
- qq. Turn the Continuous Entry knob until the marker is at + 400Hz. Adjust as necessary, A10L101, A10L102, A10L103, and A10L104 for a waveform with a rounded top, markers approximately - 3dB from the reference, and 3dB points 400Hz \pm 20Hz apart. (See Figure 5-5.)
- rr. Set the 3585A as follows:

| | |
|---|----------------|
| Frequency Span | 250Hz |
| dB/div | 2dB |
| Press | "Offset" |
| Turn Continuous Entry knob to 15.625kHz | |
| Press | "Offset" |
| Press | "Enter Offset" |

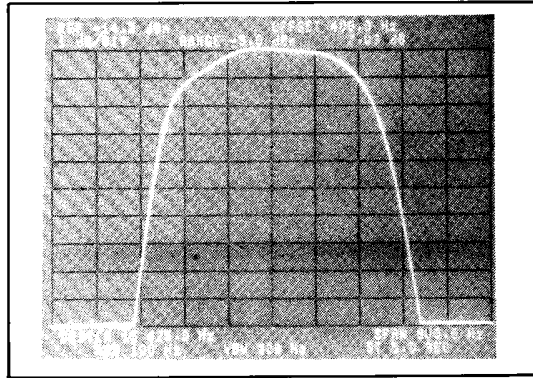

**Figure 5-5. Adjusted Waveform
- Filter Shape and 3dB Points.**

ss. Adjust the Continuous Entry knob to $\pm 75\text{Hz}$. The offset amplitude must not change more than $.3\text{dB}$ ($3\text{dB} \div 10$).

tt. Set the 3585A as follows:

| | |
|----------------|-------|
| db/div | 1dB |
| Frequency Span | 500Hz |
| Sweep Time | 10sec |

Verify the 3dB bandwidth using the procedures found in Steps g and h.

uu. **60dB Points.**

vv. Set the 3585A as follows:

| | |
|---|----------------|
| dB/div | 10dB |
| Frequency Span | 2.4kHz |
| Press: | “Offset” |
| Turn Continuous Entry knob to 15.625kHz | |
| Press: | “Offset” |
| Press: | “Enter Offset” |

ww. Turn the Continuous Entry knob $\pm 1000\text{Hz}$. The offset amplitude must be more negative than -60dB .

xx. Wax all coils on the A10 board. Place A10 back into the instrument.

5-11. A20 BANDWIDTH GAIN.

a. 3100Hz, 2000Hz, or 1740Hz Bandwidth Gain.

1. Disconnect jumper A10J1 from A10TP1.
2. Place A10 and A20 on extender boards. Connect the 3335A 50Ω output to A10 - edge connector pin 12. Also to this pin connect a 3455A configured to measure ac volts.

3. Set the 3586A/B/C to: ENTRY 10, +20dBm full scale. Press: MEAS CONT, RECALL, *, CNTR→FREQ, 0. Select either the 3100/2000/1740 Hz bandwidth according to instrument model and option.
 4. Set the 3335A to 15625Hz; adjust its amplitude such that the 3455A reads 502m Vrms.
 5. Adjust A20R95 such that the 3586A/B/C reads from 19.99dBm to 20.01dBm.
- b. 20Hz Bandwidth Gain.
 1. Select 20Hz bandwidth.
 2. Adjust A20R24 such that the 3586A/B/C reads from 19.99dBm to 20.01dBm.
 - c. 400Hz Bandwidth Gain.
 1. Select the 400Hz bandwidth.
 2. Adjust A10R105 such that the 3586A/B/C reads from 19.99dBm to 20.01dBm.
 - d. Reconnect jumper A10J1 to A10TP1.

5-12. A5 50MHz REJECTION.

- a. Connect the 50Ω output of the 3335A to the 50Ω input of the 8553B Spectrum Analyzer. Set the 3335A to 50MHz at -58dBm.
- b. Set the 8553B to:

| | |
|----------------------|--------|
| Center Frequency | 50MHz |
| Log. Reference Level | -58dBm |
| Scan Width | 1kHz |
| Input Attenuator | 0dB |
| Video Bandwidth | 1Hz |
| Scan Time | 20msec |
| Video Filter | 10kHz |

- c. Adjust the log reference for a full scale of -58dBm.
- d. Connect 3335A 50Ω output, through a 15dB, 50Ω attenuator (-hp- 355D), to A5J1.

NOTE

Use shortest cables possible.

- e. Place A5 on an extender.
- f. Insert the negative side of A5C76 into the hole marked "TEST". Connect this side of the capacitor to the 50Ω input of the 8553B using a very short cable.
- g. Adjust A5C61 so that 50MHz is below -80dBm.

- h. Disconnect the cables from the 8553B. Return A5C76 to its normal position.

5-13. A5 LOW-PASS FILTER FLATNESS.

- a. Connect the 3585A tracking generator output to a 15dB attenuator (e.g. -hp- 355D set at 15dB) using a 50Ω cable. Connect the attenuator output to the 3585A 75Ω input using a 75Ω cable and BNC barrel.

- b. Set the 3585A as follows:

| | |
|-----------------|----------------|
| Press: | “Instr Preset” |
| Auto Range | Off |
| Range | – 15dBm |
| Start Frequency | 100Hz |
| Stop Frequency | 35MHz |
| Sweep Time | .2sec |
| dB/div | 10dB |
| Press: | “Cont” |
| Press: | “Ref Lvl” |

- c. Adjust the 3585A tracking generator level for – 18dBm (3586A/B) (– 23dBm 3586C).

- d. Set the 3585A as follows:

| | |
|--|-------------|
| dB/div | .2dB |
| set the marker to | 32.515MHz |
| Press: | “Marker” |
| Press: | “Ref Lvl” |
| adjust the Continuous Entry knob to center the display | |
| Press: | “Store A→B” |
| Press: | “A-B” |
| Press: | “View B” |

- e. Set A5C76 to the “Test” position.
- f. Using the same 50Ω cable as in Step a, connect the tracking generator output through the 15dB pad used in Step a to A5J1. Connect the 75Ω cable from the 3585A input to the negative side of A5C76.
- g. On the 3585A, press “Ref Lvl” and center the display.
- h. Using A5R50, A5C53, A5C56, A5C59, A5C63, and A5C65, adjust for a display that is as flat as possible ($\pm .25$ dBm).
- i. Return A5C76 to its normal position and place A5 back into the instrument.

5-14. A5, A10 50MHz CRYSTAL FILTER.

- a. Remove A11 (2nd L.O.).
- b. Connect A51J2 to XA11, edge connector pins A13 and B13.
- c. Place A10 and A5 on extender boards and set A10R19 and A10C24 to their “number 2” position.
- d. Set the 3585A as follows:

| | |
|------------------|----------------|
| Press: | “Instr Preset” |
| Auto Range | Off |
| Range | – 5dB |
| Center Frequency | 10MHz |
| Frequency Span | 100kHz |
| RBW | 1kHz |
| Sweep Time | 1sec |
| Ref Level | – 18dBm |

- e. Connect the tracking generator output through a 15dB pad (e.g., -hp- 355D set to 15dB) to the 3585A 50 Ω input and adjust for a – 18dBm (– 23dBm 3586C) tracking generator level.
- f. Disconnect the cable from the 3585A 50 Ω input and connect the tracking generator output (still with the pad) to A5J1.
- g. Turn the 3586 off. Connect an -hp- 1120A high impedance probe (ac coupled, dc off-set (off)) to the 3585A 50 Ω input and to the right side of A10L40.
- h. Turn the 3586 back on.
- i. Set the 3586 as follows:

| | |
|-----------|------------|
| Press: | “Recall 0” |
| select | ENTRY 100 |
| Frequency | 10MHz |

- j. Adjust A5L25 for a peak on the 3585A display.
- k. Press: “MKR—REF LVL and wait one sweep.
- l. Set the 3585A as follows:

| | |
|---------------|----------------|
| Press: | “Offset” |
| Press: | “Enter Offset” |
| set marker to | + 31200Hz |
- m. Adjust A5C23 to a minimum more negative than – 50dB.

First Stage 50MHz Flatness Adjust

n. Set the 3585A as follows:

| | |
|----------------|-------------|
| Frequency Span | 11kHz |
| dB/div | .2 |
| Sweep Time | 3 sec |
| Press: | “Ref Lvl” |
| Press: | “Save”; “1” |

o. Adjust reference level as needed for an on screen display.

p. Adjust A5L21 and A5R24 for $\pm .05\text{dB}$ flatness at $\pm 2\text{kHz}$ from the center frequency (10MHz).

NOTE

If R24 is not sufficiently adjusting the flatness, A5R23 may need to be padded; see Table 5-4.

q. Place A5 back into the instrument and return A10R19 and A10C24 to their “number 1” position.

Second Stage 50MHz Crystal Filter Adjust

r. Set the 3585A as follows:

| | |
|-----------------|--------|
| Offset | Off |
| dB/div | 10dB |
| Frequency Span | 100kHz |
| Marker | 10MHz |
| Reference Level | - 5dB |

s. Adjust A10L24 for a peak on the 3585A display.

t. Press: “MKR → REF LVL.”

u. Remove the 15dB pad from between the 3585A and 3586A/B/C.

v. Set the 3585A as follows:

| | |
|-------------------|----------------|
| Press: | “Offset” |
| Press: | “Enter Offset” |
| set the marker to | + 31200Hz |
| Range | - 20dBm |

- w. Adjust A10C22 for a minimum more negative than -90dB .
- x. Place the 15dB pad back between the 3585A (tracking generator output) and 3586A/B/C.

50MHz Flatness

- y. On the 3585A, press "Recall 1", press "Ref Lvl", and adjust as necessary for an on screen display.
- z. Adjust A10L20 and A10R24 for a flatness of $\pm 0.05\text{dB}$ at the center frequency (10MHz) $\pm 1.8\text{kHz}$.

NOTE

If R24 is not sufficiently adjusting the flatness, A10R23 may need to be padded; see Table 5-4.

- aa. Place A11 and A10 back into the instrument.

Table 5-4. A5R23, A10R23 Padding Resistor List.

| | Resistance (Ω) | hp Part Number |
|-----------------------|-------------------------|----------------|
| Decrease Gain ↑ | 324 | 0698-4450 |
| | 348 | 0698-3445 |
| | 374 | 0698-4452 |
| | 402 | 0698-4453 |
| | 422 | 0698-3447 |
| Increase Gain ↓ | 453 | 0698-3510 |
| | 475 | 0698-0415 |
| | 499 | 0698-4123 |
| | 523 | 0698-4454 |
| | 549 | 0698-4456 |
| | 576 | 0698-4457 |

A5R23 (resistors 324-422)
 A10R23 (resistors 453-576)

5-15. A10 MIXER GAIN ADJUST.

- a. Connect the output (50 Ω) of the 3335A to A5J1. Set the 3335A to 1MHz, -18dBm for a 3586A/B or -23dBm for a 3586C.
- b. Connect a 3455A to A10TP1, configured to read ac volts.
- c. Set the 3586 to 1MHz, ENTRY 100, 3100Hz, $+20\text{dBm}$ full scale, SSB CARRIER, USB.
- d. Adjust A10R43 for 502mVrms on the 3455A.

5-16. A5 LO REJECTION.

- a. On the 3586A/B/C, select ENTRY 100, tune to 0Hz, enter a full scale of 0dBm.
- b. Adjust A5R4 for a reading below -25dBm from full scale.

5-17. A2 INPUT AMPLIFIER & A1 INPUT MULTIPLEXER ADJUSTMENTS.

- a. A2 10.5 Volt Regulator Adjustment.
 1. Connect a DC voltmeter to the test point on the A2 board marked “-10”.
 2. Adjust A2R105 for a DC voltmeter reading of $-10.5V \pm 0.01V$.
- b. 75Ω Return Loss.



It will be necessary to remove the front panel for return loss adjustments. See paragraph 8-A-77 for removal procedures. Do not remove or install the A1 board with the POWER switch in the ON position.

1. Connect the “SOURCE” port of the 75Ω directional bridge to the tracking generator output of the spectrum analyzer (use a 50Ω/75Ω matching pad if needed). Connect the “REFLECTED” port of the 75Ω directional bridge to the 75Ω input of the spectrum analyzer. Use 75Ω cables. Set the spectrum analyzer range to -10dBm.
2. Set the 3586 to ENTRY 100 and to a full scale setting of -20.0dBm. Put 3586 into the WIDEBAND mode.
3. With the “LOAD” port of the directional bridge open, adjust the spectrum analyzer for a sweep of 0-32.5MHz. The generator level should be set at 0dBm.

NOTE

Since the input level to the 3586 is approximately -6dBm, while its FULL SCALE is -20.0dBm, the 3586 will display an “OVLD” (overload) condition. Proceed with the adjustment and ignore the overload.

Note the level of the spectrum analyzer swept display (the “open circuit level”).

4. Connect the “LOAD” port of the 75Ω directional bridge directly to the 75Ω input of the 3586, without using a cable.
5. 3586A&B: Adjust the 3586 for a minimum level swept display on the spectrum analyzer (best return loss). The display should be at least 36dB below the “open circuit level” of Step 3. This adjustment should be made by adjusting A1L1 for

a minimum display and by adjusting the position and/or length of the wire from the input connector to the A1 board. If it is required to replace this wire as part of a repair, the length of the replacement wire should match that of the original wire.

3586C: Adjust the 3586 for a minimum level swept display on the spectrum analyzer (best return loss). The display should be at least 36dB below the “open circuit level” of Step 3. This adjustment should be made by adjusting A1L1 and A1L2 for a minimum display. A1L2 is the adjustment with greater affect on return loss and should be adjusted first. The position of the wire from the input connector to the A1 board may also affect return loss.

6. Record the level of the swept display by storing this display in the “B” register of the spectrum analyzer (STORE A→B).
 7. On the 3586, enter RECALL, ●, CNTR→FREQ, 1. This inserts the –40dBm calibration signal into the signal measurement path, and connects the “Calibration Cycle Termination” to the 3586 input.
 8. Adjust A1C2 for a swept display of minimum level on the spectrum analyzer, at least 25dB below the “open circuit level”.
 9. On the 3586, enter RECALL, ●, RDNG→OFFSET, 1. (This returns the input signal and connects the normal termination to the 3586 input.)
 10. Set the 3586’s FULL SCALE to –15.0dBm. (The overload condition will continue.)
 11. Adjust A2C7 for the best match possible of the present swept display and the display of Step 6 (the display recorded in register B of the spectrum analyzer). This makes the 3586’s input impedance the same for any gain setting of the input amplifier. (The different gains are accessed by setting the FULL SCALE level of the 3586.)
- c. Input Amplifier Flatness Adjustment.
1. On the 3586, enter RECALL, 0. Set the spectrum analyzer for a 0 to 32.5MHz sweep, at 1dB/DIV., with a range of –25.0dBm.
 2. Connect the 50Ω output of the tracking generator to the 10dB and 1dB step attenuators. Set the attenuators to 38dB of attenuation. Connect the output of the attenuators through a 50Ω/75Ω matching pad and a 75Ω cable to the 75Ω input of the spectrum analyzer.
 3. Adjust the spectrum analyzer’s reference level control for a swept display whose level is centered on the spectrum analyzer’s display. Store this swept display in the spectrum analyzer’s register B (STORE A→B). This stored display represents the frequency response of the tracking generator, the attenuators, and the spectrum analyzer itself. This frequency response of the equipment can later be nulled out when adjusting the input amplifier’s flatness.
 4. Set the attenuators to 55dB. Connect the attenuator output through the matching pad and 75Ω cable to the 75Ω input of the 3586.

5. Connect A2J3 (the input amplifier output) to the 50Ω input of the spectrum analyzer. Use the “A-B” display mode of the spectrum analyzer to null out the equipment’s own frequency response, leaving only the frequency response of the input amplifier itself.
6. Set the 3586’s FULL SCALE to – 35.0dBm. Adjust A2C32 for a swept display that is as flat as possible, to ±0.8dB from the level at the center of the display.
7. Move the frequency-center point of the swept display to the center of the spectrum analyzer display by adjusting the reference level control of the spectrum analyzer.
8. Set the 3586’s FULL SCALE to – 30.0dBm. Set the attenuators to 50dB. Adjust A2C33 for a swept display that is as flat as possible, to ±0.8dB from the level at the center of the display.
9. Set the 3586’s FULL SCALE to – 15.0dBm. Set the attenuators to 35dB. Adjust A2C4 for a swept display that is as flat as possible, to ±0.8dB from the level at the center of the display.
10. Set the 3586’s FULL SCALE to + 5.0dBm. Set the attenuators to 15dB. Adjust A2C5 and A2R5 for a swept display that is as flat as possible, to ±0.8dB from the level at the center of the display.
11. Repeat Steps 4 through 10 as needed.

5-18. A1, A2 FREQUENCY RESPONSE (BALANCED INPUTS).

NOTE

Steps a through j adjust the frequency response of the 124Ω, 135Ω or 150Ω input.

- a. Connect the tracking output of the 3585A (via a 50Ω/75Ω minimum loss pad) to the 75Ω input of the 3586A/B.
- b. Connect A2J3 to the 3585A 50Ω input.
- c. Set the 3585A to the following settings:

| | |
|-------------|--------|
| Entry Range | 100dB |
| Full Scale | – 5dBm |
| Start Freq. | 1kHz |
| Stop Freq. | 10MHz |
| dB/DIV. | 1dB |

- d. Set the Reference Level on the 3585A to an even number (in dB).
- e. On the 3585A, press: Store A, A-B, View B off.

- f. Decrease the Reference Level by the following amount:
- | | |
|-------------|-------------|
| 124Ω | 150Ω |
| 7dB | 8dB |
- g. Connect the minimum loss pad to the input of the appropriate matching pad (see Figure 4-6 in Section IV).
- h. Connect the output of the matching pad to the appropriate input of the 3586A/B. Set the 3586 to ENTRY 100, -5dBm full scale. Set CAL off.
- i. Make the following adjustments:
- 124Ω: A1R15, L12, L13 for center line ±.08dB.
150Ω: A1R15, L12 for center line ±.08dB.
- j. Remove the matching pad.

NOTE

Steps k through r adjust the 600Ω input frequency response.

- k. Repeat Steps a and b.
- l. Set the 3585A to: Stop Freq. 100kHz, Start Freq. 1kHz, 1dB/DIV.
- m. Repeat Steps d and e.
- n. Decrease the Reference Level by 15dB.
- o. Repeat Steps g and h for the 600Ω matching pad and input.
- p. Select the 600Ω input.
- q. Adjust A1C22 (600Ω RESPONSE) for center line flatness ±.13dB (3586A/B). For a 3586C, adjust A1C22 and A1R28 (600Ω GAIN) for center line flatness ±.13dB.
- r. Remove the matching pad.

NOTE

Steps s through bb adjust the Balanced 124Ω input (3586B only).

- s. Connect the 3585A tracking generator to the unbalanced input of the 124Ω Balance Testing Apparatus (see Figure 4-5 in Section IV) and also to the 75Ω input of the 3586 using a BNC Tee connector.
- t. Connect the balanced output of the test fixture to the 124Ω balanced input of the 3586B.
- u. Connect the 3585A 50Ω input to A2J3 on the 3586.

- v. Set the 3585A controls as follows:
- | | |
|-------------|--------|
| Auto Range | OFF |
| Range | -10dB |
| Ref Level | -10dBm |
| dB/DIV | 10dB |
| Start Freq. | 10kHz |
| Stop Freq. | 10MHz |
- w. Select the 10k Ω ||50pF termination impedance for the 3586B.
- x. On the 3586B, select ENTRY 100, Full Scale = +5dBm, CAL off.
- y. On the 3585A, select:
STORE A
A-B
VIEW B off
- z. Adjust the 3585A sweep for 1cm from the top of the display.
- aa. Adjust A1C10 for a minimum level.
- bb. The measured result should be less than -38dB.

5-19. INTERMODULATION DISTORTION ADJUSTMENT.

- a. Set one synthesizer to 32.15MHz at +1.0dBm on its 50 Ω output. Set the second synthesizer to 32.0MHz at +1.0dBm on its 50 Ω output. Connect the output of the second synthesizer to the frequency doubler.
- b. Connect each synthesizer's output (via 50 Ω /75 Ω pads) to the inputs of the combiner (see Figure 4-9). Connect the output of the combiner to the 75 Ω input of the 3586. Set the FULL SCALE of the 3586 to -10.0dBm in ENTRY 100, CAL off.
- c. Connect A2J3 to the 50 Ω input of the spectrum analyzer. Set the spectrum analyzer to a center frequency of 32.075MHz, a frequency span of 500kHz, 10dB/DIV., resolution BW = 300Hz, and video BW = 1kHz.
- d. Using the spectrum analyzer in the MANUAL SWEEP mode to measure the 32.0MHz and 32.15MHz responses, adjust the levels of the synthesizers until both responses are -16.0dBm (-21dBm for 3586C). The 3586 may show an overload condition; this is normal.
- e. Set the spectrum analyzer to a center frequency of 150kHz, a frequency span of 1kHz, a resolution BW = 10Hz, and video BW = 30Hz. Use the MANUAL SWEEP of the spectrum analyzer to measure the level of the 150kHz response.
- f. Adjust A2R12 for a minimum level of the 150kHz response.

5-20. A4 BROADBAND POWER/OVERLOAD/CALIBRATION ADJUSTMENTS.

- a. Calibrator Adjustments.
1. Connect the 75 Ω output of the Synthesizer/Level Generator to the 75 Ω input of the 3586. Keep the cable as short as possible.

2. Set the level generator as follows:

| | |
|-----------------|-----------|
| Frequency: | 1.234MHz |
| Frequency Step: | 31.0MHz |
| Level: | -37.00dBm |
| Level Step: | 45.0dB |
3. Enter RECALL, 0 on the 3586 to initialize the instrument. Tune the 3586 to 1.234MHz and enter a FREQ STEP of 31.0MHz. Turn the AVE function on. Select AUTO 10, CAL off, 3100Hz.
4. Adjust A4R134 (CAL -40dBm) for a 3586 level reading of $[-37.00\text{dBm} \pm 0.01\text{dB}$ minus any cable loss]. (A typical loss in a short piece of 75Ω coaxial cable at this frequency would be 0.01 or 0.02dB. Adapt the 3586 level reading to your particular cable loss). Turn the AUTO CAL off, then on.

NOTE

Front panel reading will change only after AUTO-CAL is cycled.

5. Repeat the adjustment of Step 4, followed by an AUTO CAL off/on, until no further adjustment is necessary.
6. Step the level generator's amplitude up to +8.00dBm.
7. Adjust A4R136 (CAL -20dBm) for a 3586 level reading of $[+8.00\text{dBm} \pm 0.01\text{dB}$ minus any cable loss]. (A typical loss in a short piece of 75Ω coaxial cable at this frequency would be 0.01 or 0.02dB. Adapt the 3586 level reading to your particular cable loss). Turn the AUTO CAL off, then on.
8. Repeat the adjustment of Step 7, followed by an AUTO CAL off/on, until no further adjustment is necessary.
9. Step the level generator's amplitude down to -37.00dBm.
10. Repeat Steps 4 to 8 until no further adjustment is necessary.
11. Step the level generator's frequency and the 3586's frequency up to 32.234MHz. Step the level generator's amplitude up to +8.00dBm.
12. Adjust A4L106 (CAL FLATNESS -20dBm) for a 3586 level reading of $[+8.00\text{dBm} \pm 0.01\text{dB}$ minus any cable loss]. (A typical loss in a short piece of 75Ω coaxial cable at this frequency would be 0.07 or 0.08dB. Adapt the 3586 level reading to your particular cable loss). Turn the AUTO CAL off, then on.

NOTE

Front panel reading will change only after AUTO-CAL is cycled.

13. Repeat the adjustment of Step 12, followed by an AUTO CAL off/on, until no further adjustment is necessary.
 14. Step the level generator's amplitude down to -37.00dBm.
 15. Adjust A4C113 (CAL FLATNESS -40dBm) for a 3586 level reading of $[-37.00\text{dBm} \pm 0.01\text{dB}$ minus any cable losses]. (A typical loss in a short piece of 75 Ω coaxial cable at this frequency would be 0.07 or 0.08dB. Adapt the 3586 level reading to your particular cable loss). Turn the AUTO CAL off, then on.
 16. Repeat the adjustment of Step 15, followed by an AUTO CAL off/on, until no further adjustment is needed.
 17. Repeat Steps 11 through 16 as necessary.
- b. Broadband Power Adjustments.

1. Set the level generator as follows:

| | | |
|----------------|---|-----------|
| FREQ | = | 1.0023MHz |
| FREQ STEP | = | 1.0MHz |
| LEVEL | = | -35.0dBm |
| AMPLITUDE STEP | = | 20.0dB |

Connect the 75 Ω output of the level generator to the 75 Ω input of the 3586.

2. On the 3586, do the following:
 - (a) Enter RECALL, 0.
 - (b) Turn the AUTO CAL off.
 - (c) Enter RECALL, • (decimal point), CNTR→FREQ, 0.
 - (d) Select ENTRY 100.
 - (e) Enter a FULL SCALE of -30.0dBm.
 - (f) Turn the WIDEBAND mode on.
 - (g) Turn the AVE function on.
 - (h) Enter RECALL, • (decimal point), CNTR→FREQ, 2.
3. Adjust A4R29 (BBP OFFSET) for a reading on the 3586 of $-35.00\text{dBm} \pm 0.1\text{dB}$.
4. Step the level generator's amplitude down to -55.0dBm.
5. Adjust A4R30 (BBP GAIN) for a reading on the 3586 of $-55.00\text{dBm} \pm 0.1\text{dB}$.
6. Return the level generator's amplitude to -35dBm.
7. Step the frequency of the level generator down to 2.30kHz.
8. Set the level generator's amplitude to -35dBm at its 50 Ω output. Connect the level generator's output to pin A11 of the A4 assembly (bottom side of A4R19).
9. Note and record the front panel reading of the 3586.

10. Set the level generator to -35dBm at 30.0023MHz .
11. Adjust A4R24 (BBP FLATNESS) so the front panel reading of the 3586 is the same as in Step 9.
12. Repeat Steps 7 through 11 as necessary until no further adjustment of A4R24 is required.
13. Repeat Steps 1 through 6 as necessary.

5-21. A15 TRACKING OUTPUT ADJUSTMENT.

NOTE

Make any necessary adjustments to the Sum & Step Loop before adjusting the A15 assembly.

- a. Tune the 3586 to 10.0kHz . Connect the tracking output on the rear panel (“F₀-32MHz”) to the 75Ω input of the 3586.
- b. Adjust A15R3 (Mixer Balance) to maximize the level reading of the 3586.

5-22. A70 IMPAIRMENTS (OPTION 003 ONLY).

NOTE

Steps a through s adjust the notch filter.

- a. Connect the 75Ω output of the 3335A to the 75Ω input of the 3586A/B.
- b. On the 3586A/B press Noise/Demod, select the WTD filter, select AUTO 10, turn the offset on, and enter a frequency of 1MHz .
- c. Set the 3335A to 1001000Hz at 0dBm .
- d. On the 3586A/B, press RDNG→OFFSET.
- e. Press Noise/Tone.
- f. Adjust A70 R33 (Notch 2) for a minimum 3586A/B/ Level reading; the reading should be below -55dBm .
- g. Tune the 3335A to 1001010Hz . On the 3586A/B press: Noise/Demod, RDNG→OFFSET, Noise/Tone.
- h. Adjust A70 R40 (Notch 1) for a minimum level reading i.e. below -55dBm .
- i. Tune the 3335A to 1001017Hz . On the 3586A/B/, press: Noise/Demod, RDNG→OFFSET, Noise/Tone.
- j. Adjust A70 R45 (Notch 3) for a minimum level reading i.e. below -55dBm .
- k. Tune the 3335A to 1001182Hz . On the 3586A/B, press: Noise/Demod, RDNG→OFFSET,Noise/Tone.

- l. The level reading should be greater than -2.5dBm .
- m. Tune the 3335A to 1000862Hz. On the 3586A/B, press: Noise/Demod RDNG→OFFSET, Noise/Tone.
- n. The level reading should be greater than -2.5dBm .
- o. Tune the 3335A to 1000995Hz.
- p. On the 3586A/B, press: Noise/Demod, RDNG→OFFSET, Noise/Tone.
- q. The level reading should be less than -55dBm .
- r. Increase the frequency of the 3335A by 5Hz.
- s. If the frequency of the 3335A is less than 1001030Hz, then proceed with Steps p to r. When 1001030Hz is reached, the adjustment is completed.

NOTE

Steps t through aa adjust the "Logger".

- t. After putting the A70 board on extenders, connect the 3455A to A70 TP8. The voltmeter should be configured to measure ac.
- u. Connect the 75Ω output of the 3335A to the 75Ω input of the 3586A/B. Set the 3335A to 0dBm. For a 3586A, set the 3335A to 1000800Hz; for a 3586B, 1001000Hz.
- v. On the 3586A/B, select the 75Ω input and the 100dB range (using ENTRY 100), and turn off the AUTO CAL. Press: RECALL, •, CNTR→FREQ, 0. Enter a full scale of 0dBm. Select the SSB Channel Carrier, and the upper sideband (\swarrow). Press Noise/Demod, and the WTD Bandwidth. Press: RECALL, •, CNTR→FREQ, 2.
- w. Adjust the output amplitude of the 3335A until the 3455 reads 0.750 Vac.
- x. Adjust A70 R70 (Logger offset) such that the 3586A/B reads a level from -0.05dBm to $+0.05\text{dBm}$.
- y. Decrease the amplitude of the 3335A by 60dB.
- z. Adjust A70 R72 (Logger gain) for a level reading from -59.9dBm to -60.1dBm .
- aa. Increase the 3335A amplitude by 60dB. Repeat Steps x through z until no further adjustment is needed.

NOTE

Steps bb through kk adjust the Impulse Noise.

NOTE

Steps bb through dd apply only to those instruments with revision C or earlier A70 boards. For revision D boards, continue with Step ee.

- bb. Connect the 3455A to A70 TP5.
- cc. The voltmeter should be configured to measure dc.
- dd. Adjust A70R102 (DAC) such that the 3455A reads +5.9VDC ($\pm .1V$) (pertains to both the 3586A and 3586B).
- ee. Set the 3335A to 1002000Hz at 0dBm.
- ff. The 3335A 75 Ω output should be connected to the 3586A/B 75 Ω input.
- gg. On the 3586A/B, enter a frequency of 1MHz. Select the 100dB range and carrier upper sideband (\swarrow). Enter a full scale of 0dBm. Press Impulse. Enter a threshold of -20dBm and a time of .3 min.
- hh. Connect a 5328A to A70 TP3.
- ii. Set the counter to: Period A with a Time Resolution to 100 μ SEC.
- jj. Adjust A70 R97 such that the counter reads from 142 to 144 msec (for a 3586B) or from 124 to 126 msec (for a 3586A).
- kk. Press START on the 3586A/B. The Impulse Noise reading should be from 202 to 212 counts (for a 3586B) or from 231 to 241 counts (for a 3586A).

NOTE

Steps ll through ww adjust the Phase Jitter. All instruments must be phase-locked for phase jitter adjustments.

- ll. Combine the 50 Ω outputs of the 3335A and the 3325A (via 50 Ω /75 Ω pads) using a power combiner (see Figure 4-9); connect the output of the combiner to the 75 Ω input of the 3586A/B.
- mm. Set the 3335A to 1001150Hz at -20dBm with a step frequency of 130Hz.
- nn. Set the 3325A to 1001000Hz at 0dBm.
- oo. On the 3586A/B, Select ENTRY 100, enter a full scale of 0dBm and a frequency of 1MHz. Select the carrier upper sideband mode, and 3100Hz bandwidth, and \emptyset Jitter. Turn the average on. Press: RECALL, ●, CNTR \rightarrow FREQ, 2.
- pp. If E2.3 is shown in the Measurement display, then adjust A70R181 (VFD FREQ ADJ) very slowly until a reading is obtained.
- qq. Adjust A70 R146 (\emptyset jitter gain) for a phase jitter display from 11.4 $^{\circ}$ p-p to 11.6 $^{\circ}$ p-p.

- rr. Step the 3335A down 130Hz.
- ss. Adjust A70 R133 (\emptyset jitter 20Hz) for a phase jitter reading from 11.2°p-p to 11.4°p-p.


NOTE

For instruments with revision C or earlier A70 boards, skip Steps tt and uu and continue with Step vv.


- tt. Press the “WTD 3100Hz” key (4-300Hz frequency band) in the Bandwidth block on the 3586 front panel. Adjust A70R125 (4Hz ϕ JITTER) for a phase jitter reading from 11.0° p-p to 11.2° p-p.
- uu. Press the “3100Hz” key (20-300Hz frequency band) on the 3586 front panel.
- vv. Set the 3335A to 1001300Hz. The 3586A should have a phase jitter reading from 10°p-p to 13°p-p.
- ww. Disconnect the combiner and the 3325A. Connect the 3335A 75 Ω output to the 75 Ω input of the 3586A/B.
- xx. Set the 3335A to 1000960Hz at 0dBm.
- yy. Slowly adjust A70 R181 clockwise until E2.3 is displayed.

5-23. A16 10MHz FREQUENCY REFERENCE ADJUSTMENTS (OPTION 004 ONLY).


- a. With the oven cold, adjust A16R7 so that the DC voltage at A16TP2 is equal to the DC voltage at A16TP1 + 0.3V (TP2 = TP1 + 0.3V).
- b. After the oven has warmed up and stabilized (when the red LED on the A16 board has gone off), adjust the frequency of the oven oscillator to 10.000000MHz \pm 1Hz. The frequency is adjusted with the screw adjustment on the oven itself. This may be checked with a counter at the “10MHz OVEN” output on the rear panel, or by means of the method shown in Paragraph 4-13. With either method, the frequency source used as a standard or as the reference for the counter should have a stability of better than 1 x 10⁻⁸/year.




880
hp Part No. 02586-88580




880
hp Part No. 02586-88540
Rev A

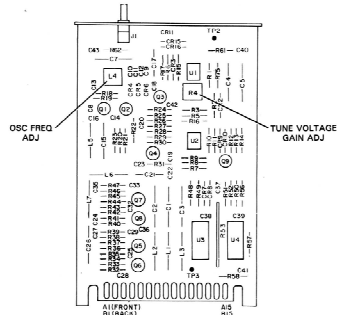


831
hp Part No. 02586-88531

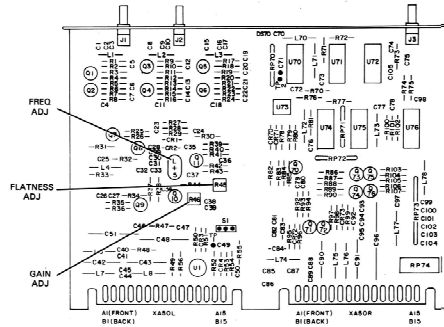


850
hp Part No. 02586-88550

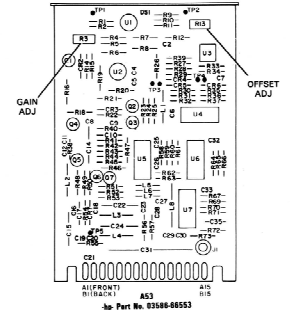


853
hp Part No. 02586-88553

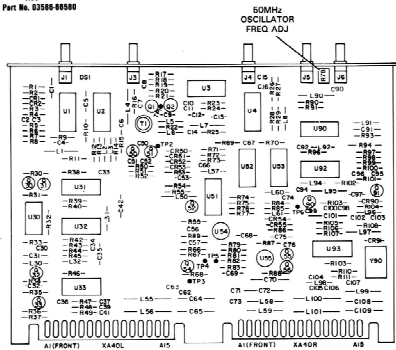


880
hp Part No. 02586-88540
Rev B

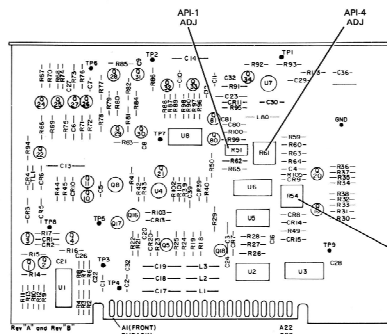

832
hp Part No. 02586-88532

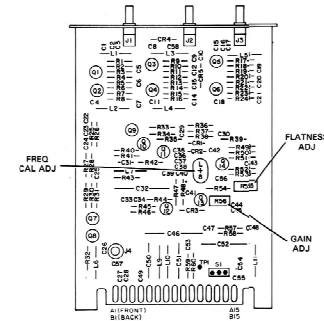

851
hp Part No. 02586-88551

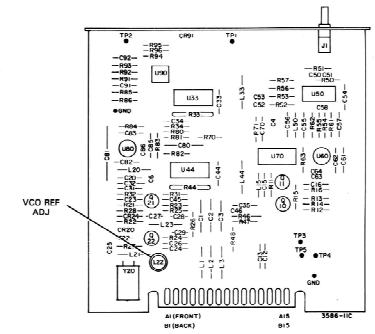

811
hp Part No. 02586-88511

Figure S-6. Adjustment Locations.
S-37/S-38

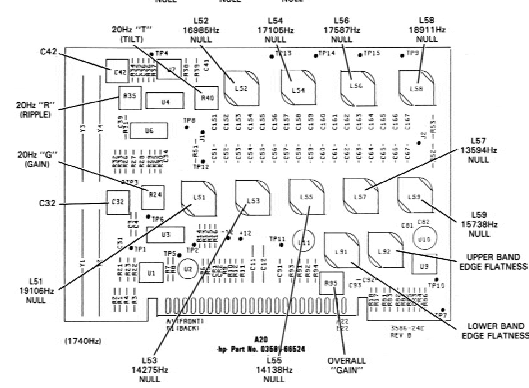
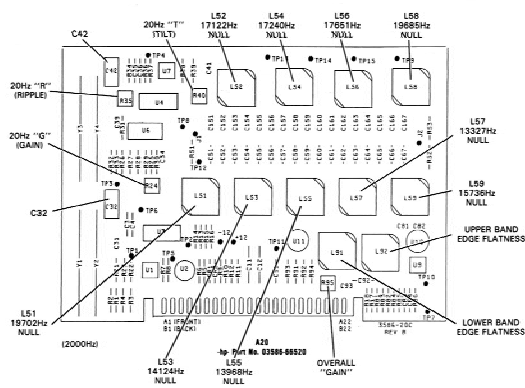
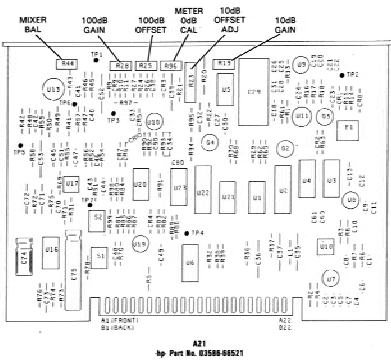
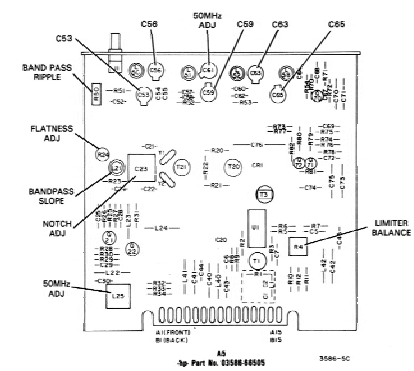
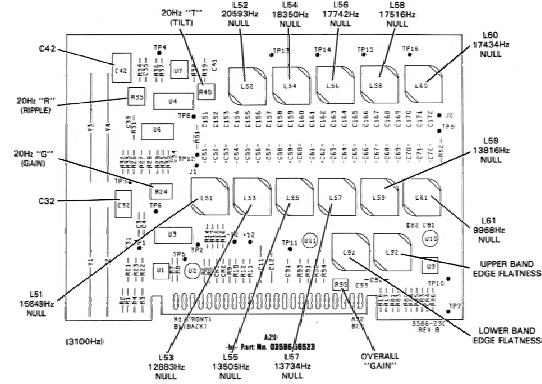
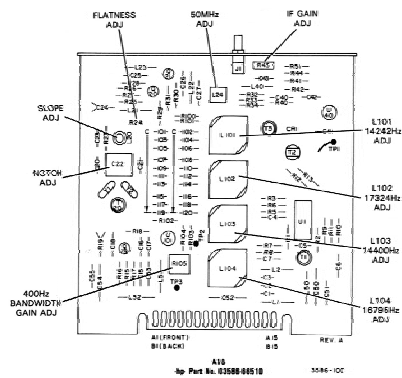
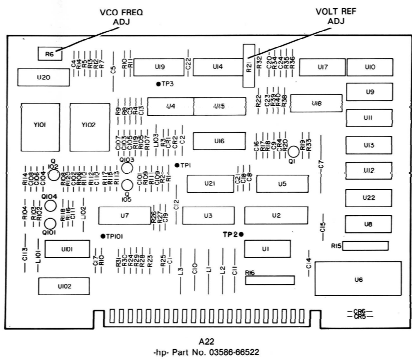


Figure S-6. Adjustment Locations (Cont'd).
S-39/5-40

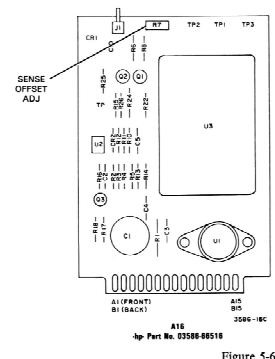
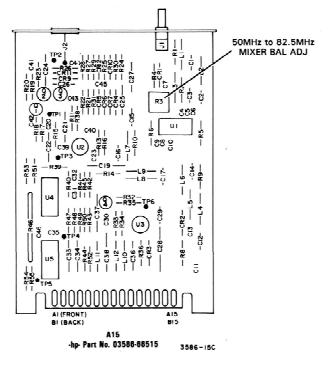
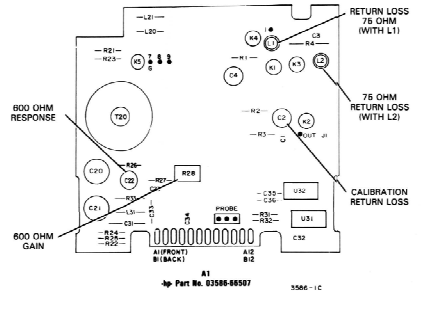
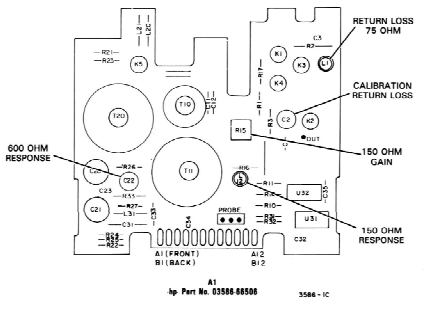
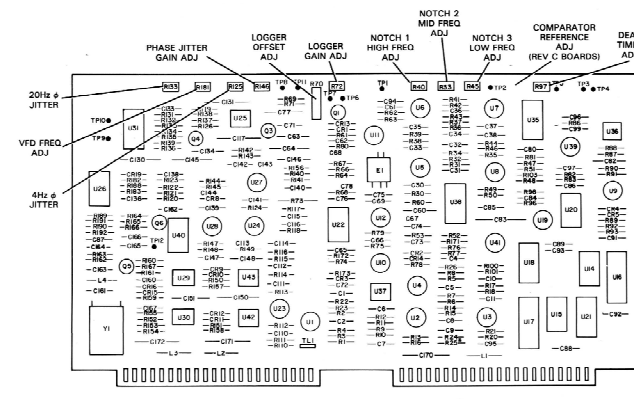
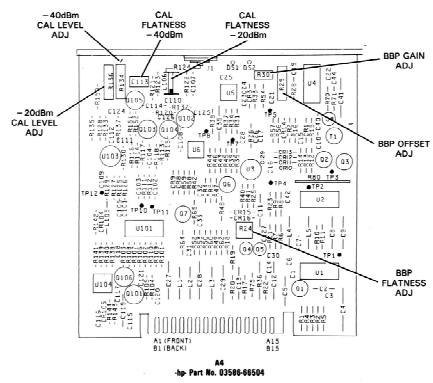
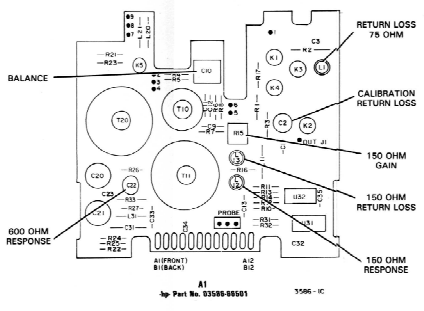
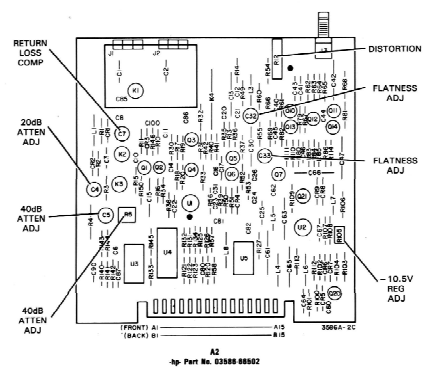


Figure 5-6. Adjustment Locations (Cont'd).
5-41/5-42

Table of Contents

| Paragraph | Page |
|-----------|--|
| 6-1. | Introduction.....6-1 |
| 6-3. | Chassis Mounted and Miscellaneous Parts 6-1 |
| 6-5. | Ordering Information.....6-1 |
| 6-7. | Direct Mail Order System.....6-1 |
| 6-10. | Spare Parts Service Kit.....6-2 |
| 6-12. | Mechanical Parts.....6-2 |
| 6-14. | Metric Parts.....6-2 |

SECTION VI

REPLACEABLE PARTS

6-1. INTRODUCTION.

6-2. This section contains information for ordering replacement parts. Table 6-3 lists the parts in alphameric order of their reference designators and provides the following information:

- a. -hp- Part Number.
- b. Total quantity used in the instrument (Qty column). The total quantity of a part is given the first time the part number appears.
- c. Description of the part. (See Table 6-1 for abbreviations.)
- d. Typical manufacturer of the part in a five-digit code. (See Table 6-2 for list of manufacturers).
- e. Manufacturer's part number.

6-3. Chassis Mounted and Miscellaneous Parts.

6-4. Chassis mounted components, cable assemblies, mechanical parts and miscellaneous parts not having reference designators are listed near the end of Table 6-3.

6-5. ORDERING INFORMATION.

6-6. To obtain replacement parts, address your order or inquiry to the nearest Hewlett-Packard Sales and Service Office. Identify parts by their -hp- Part Numbers or, if not listed, include a description of the part which covers function and location within the instrument. Also include the instrument model and serial number.

6-7. DIRECT MAIL ORDER SYSTEM.

6-8. Within the USA, Hewlett-Packard can supply parts through a direct mail order system. Advantages of using the system are as follows:

- a. Direct ordering and shipment from the -hp- Parts Center in Mountain View, California.
- b. No maximum or minimum on any mail order (there is a minimum order amount for parts ordered through a local -hp- office when the orders require billing and invoicing).
- c. Prepaid transportation (there is a small handling charge for each order).
- d. No invoices — to provide these advantages, a check or money order must accompany each order.

6-9. Mail order forms and specific ordering information is available through your local -hp-office. Addresses and phone numbers are located at the back of this manual.

6-10. SPARE PARTS SERVICE KIT.

6-11. Hewlett-Packard offers a Spare Parts Service Kit for the 3586A/B/C (-hp- Part Number 03586-68701). The kit consists of a group of selected replacement parts and components for this instrument which can change in content and which therefore are not listed in this manual. A current list of the contents for the Customer Service Kit may be obtained on request and the kit itself may be ordered through your nearest Hewlett-Packard office.

Table 6-1. Standard Abbreviations.

| ABBREVIATIONS | | | |
|---------------|------------------------------------|------------------|--|
| Ag | silver | Hz | hertz (cycle(s) per second) |
| Al | aluminum | ID | inside diameter |
| A | ampere(s) | imp | impregnated |
| Au | gold | incd | incandescent |
| C | capacitor | ins | insulation(s) |
| cer | ceramic | kΩ | kiloohm(s) = 10 ⁺³ ohms |
| coef | coefficient | kHz | kilohertz = 10 ⁺³ hertz |
| com | common | L | inductor |
| comp | composition | lin | linear taper |
| conn | connection | log | logarithmic taper |
| dep | deposited | mA | milliampere(s) = 10 ⁻³ amperes |
| DPDT | double pole double-throw | MHZ | megahertz = 10 ⁺⁶ hertz |
| DPST | double-pole single-throw | MΩ | megohm(s) = 10 ⁺⁶ ohms |
| elect | electrolytic | met | metal film |
| encap | encapsulated | mfr | manufacturer |
| F | farad(s) | ms | millisecond |
| FET | field effect transistor | mtg | mounting |
| fixd | fixed | mV | millivolt(s) = 10 ⁻³ volts |
| GaAs | gallium arsenide | μF | microfarad(s) |
| GHz | gigahertz = 10 ⁺⁹ hertz | μs | microsecond(s) |
| gd | guarded | μV | microvolt(s) = 10 ⁻⁶ volts |
| Ge | germanium | my | Mylar [®] |
| grd | ground(ed) | nA | nanoampere(s) = 10 ⁻⁹ amperes |
| H | henry(ies) | NC | normally closed |
| Hg | mercury | Ne | neon |
| | | NO | normally open |
| | | NPO | negative positive zero (zero temperature coefficient) |
| | | ns | nanosecond(s) = 10 ⁻⁹ seconds |
| | | nsr | not separately replaceable |
| | | Ω | ohm(s) |
| | | obd | order by description |
| | | OD | outside diameter |
| | | p | peak |
| | | pA | picoampere(s) |
| | | pc | printed circuit |
| | | pF | picofarad(s) 10 ⁻¹² farads |
| | | piv | peak inverse voltage |
| | | p/o | part of |
| | | pos | position(s) |
| | | poly | polystyrene |
| | | pot | potentiometer |
| | | p-p | peak-to-peak |
| | | ppm | parts per million |
| | | prec | precision (temperature coefficient, long term stability and/or tolerance) |
| | | R | resistor |
| | | Rh | rhodium |
| | | rms | root-mean-square |
| | | rot | rotary |
| | | Se | selenium |
| | | sect | section(s) |
| | | Si | silicon |
| | | sl | slide |
| | | SPDT | single pole double throw |
| | | SPST | single pole single-throw |
| | | Ta | tantalum |
| | | TC | temperature coefficient |
| | | TiO ₂ | titanium dioxide |
| | | tog | toggle |
| | | tol | tolerance |
| | | trim | trimmer |
| | | TSTR | transistor |
| | | V | volt(s) |
| | | vacw | alternating current working voltage |
| | | var | variable |
| | | vdcw | direct current working voltage |
| | | w | watt(s) |
| | | w/ | with |
| | | wiv | working inverse voltage |
| | | w/o | without |
| | | ww | wirewound |
| | | * | optimum value selected at factory, average value shown (part may be omitted) |
| | | ** | no standard type number assigned selected or special type |
| | | ® | Dupont de Nemours |
| DESIGNATORS | | | |
| A | assembly | FL | filter |
| B | motor | HR | heater |
| BT | battery | IC | integrated circuit |
| C | capacitor | J | jack |
| CR | diode or thyristor | K | relay |
| DL | delay line | L | inductor |
| DS | lamp | M | meter |
| E | misc electronic part | MP | mechanical part |
| F | fuse | P | plug |
| | | Q | transistor |
| | | QCR | transistor diode |
| | | Rip1 | resistor(pack) |
| | | RT | thermistor |
| | | S | switch |
| | | T | transformer |
| | | TB | terminal board |
| | | TC | thermocouple |
| | | TP | test point |
| | | TS | terminal strip |
| | | U | microcircuit |
| | | V | vacuum tube, neon bulb, photocell, etc. |
| | | W | wire |
| | | X | socket |
| | | XDS | lampholder |
| | | XF | fuseholder |
| | | Y | crystal |
| | | Z | network |

6-12. MECHANICAL PARTS.

6-13. An illustrated exploded drawing of the main parts of the instrument cabinet is included following Table 6-3. (See Figure 6-1.)

6-14. METRIC HARDWARE.

6-15. Most of the 3586 hardware (screws, nuts, etc.) are metric. Designation of a metric screw is done in the following manner. Where M3x.5x20PH is the designation for a metric screw:

- M = metric
- 3 = 3mm (width of screw including threads)
- .5 = .5mm (distance between threads, called "pitch")
- 20 = 20mm (length of screw)
- PH = pan head (FH = flat head)

Table 6-2. Code List Of Manufacturers.

| Manufacturer No. | Manufacturer Name | Address |
|-------------------------|-------------------------------------|-------------------------|
| H9027 | Schurter A G H | Luzern, SW |
| 01121 | Allen-Bradley Co | Milwaukee, WI 53204 |
| 01295 | Texas Instr Inc Semicond Cmpnt Div | Dallas, TX 75222 |
| 01928 | RCA Corp Solid State Div | Somerville, NJ 08876 |
| 02111 | Spectrol Electronics Corp | City of Ind, CA 91745 |
| 03888 | KDI Pyrofilm Corp | Whippany, NJ 07981 |
| 04713 | Motorola Semiconductor Products | Phoenix, AZ 85062 |
| 06665 | Precision Monolithics Inc | Santa Clara, CA 95050 |
| 07263 | Fairchild Semiconductor Div | Mountain View, CA 94042 |
| 07716 | TRW Inc Burlington Div | Burlington, IA 52601 |
| 07933 | Raytheon Co Semiconductor Div HQ | Mountain View, CA 94040 |
| 11236 | Cts of Berne Inc | Berne, IN 46711 |
| 18178 | Vactec Inc | Maryland Hgts, NO 63043 |
| 18324 | Signetics Corp | Sunnyvale, CA 94086 |
| 19701 | Mepco/Electra Corp | Mineral Wells, TX 76067 |
| 20932 | Emcon Div ITW | San Diego, CA 92129 |
| 23936 | Pamotor Div William J Purdy | Burlingame, CA 94010 |
| 24046 | Transitron Electronic Corp | Wakefield, MA 01880 |
| 24355 | Analog Devices Inc | Norwood, MA 02062 |
| 24546 | Corning Glass Works (Bradford) | Bradford, PA 16701 |
| 26654 | Varadyne Inc | Santa Monica, CA 90404 |
| 27014 | National Semiconductor Corp | Santa Clara, CA 95051 |
| 28480 | Hewlett-Packard Co Corporate HQ | Palo Alto, CA 94304 |
| 32997 | Bourns Inc Trimptot Prod Div | Riverside, CA 92507 |
| 34371 | Harris Semicon Div Harris-Intertype | Melbourne, FL 32901 |
| 50088 | Mostek Corp | Carrollton, TX 75006 |
| 51642 | Centre Engineering Inc | State College, PA 16801 |
| 52763 | Stettner-Trush Inc | Cazenovia, NY 13035 |
| 54294 | Cutler-Hammer-Inc Shallcross Mfg Co | Selma, NC 27576 |
| 56289 | Sprague Electric Co | North Adams, MA 01247 |
| 72136 | Electro Motive Corp Sub IEC | Willimantic, CT 06226 |
| 73138 | Beckman Instruments Inc Helipot Div | Fullerton, CA 92634 |
| 74970 | Johnson E F Co | Waseca, MN 56093 |
| 75042 | TRW Inc Philadelphia Div | Philadelphia, PA 19108 |
| 75915 | Littelfuse Inc | Des Plaines, IL 60016 |
| 82389 | Switchcraft Inc | Chicago, IL 60630 |
| 91637 | Dale Electronics Inc | Columbus, NE 68601 |

6-16. A metric nut that would fit a M3x.5x20PH screw would have a M3x.5 designation since that is all that is necessary to describe its pertinent dimensions.

6-17. The few exceptions to the "all-metric" configuration are listed in Table 6-4. Part numbers for metric screws and nuts are listed in Table 6-5.

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|----------------------|
| A1 | 03586-66501**3 | | 1 | INPUT MULTIPLEXER (3586B) **DOES NOT INCLUDE ALUMINUM BOX, COVER, OR BOX-MOUNTED CONNECTORS UNDER THIS NUMBER. | 28480 | 03586-66501 |
| A1C1 | 0160-2199 | 2 | 2 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C2 | 0121-0114 | 5 | 1 | CAPACITOR-V TRMR-CER 7-25PF 350V PC-MTG | 52763 | 304322 7/25PF N300 |
| A1C3 | 0160-2199 | 2 | 1 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C9 | 0160-0128 | 3 | 4 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C10 | 0121-0162 | 3 | 1 | CAPACITOR-V TRMR-ATR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A1C11 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C12 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C13 | 0160-0938 | 3 | 1 | CAPACITOR-FXD 1000PF +-5% 100VDC MICA | 28480 | 0160-0938 |
| A1C20 | 0180-2735 | 4 | 2 | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C21 | 0180-2735 | 4 | | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C22 | 0121-0178 | 1 | 1 | CAPACITOR-V TRMR-CER 15-60PF 200V | 52763 | 304322 15/60PF N1500 |
| A1C23 | 0140-0197 | 4 | 1 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A1C31 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF +-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A1C32 | 0160-0134 | 1 | 1 | CAPACITOR-FXD 220PF +-5% 300VDC MICA | 28480 | 0160-0134 |
| A1C33 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C34 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A1C35 | 0160-3879 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A1J1 | 1250-1637 | 3 | 1 | CONNECTOR-RF SM-SNP M SCL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A1J2 | 1251-3192 | 1 | 1 | CONNECTOR 3-PIN M POST TYPE | 28480 | 1251-3192 |
| A1J3 | 1250-1116 | 3 | 2 | CONNECTOR-MINI WECCO (3586B STANDARD) | 28480 | 1250-1116 |
| A1J3 | 1250-1053 | 7 | 2 | CONNECTOR-WECCO (3586B OPTION 001) | 28480 | 1250-1053 |
| A1J4 | 1251-5790 | 9 | 2 | CONNECTOR-WECCO 310 | 82389 | M-114B |
| A1J5 | 1251-5790 | 9 | | CONNECTOR-WECCO 310 | 82389 | M-114B |
| A1J6 | 1250-1116 | 3 | | CONNECTOR-MINI WECCO (3586B STANDARD) | 28480 | 1250-1116 |
| A1J6 | 1250-1053 | 7 | | CONNECTOR-WECCO (3586B OPTION 001) | 28480 | 1250-1053 |
| A1K1 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K2 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K3 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K4 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K5 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1L1 | 9140-0422 | 7 | 1 | INDUCTOR-FIXED #28 AWG, 7-1/2 TURNS | 28480 | 9140-0422 |
| A1L11 | 9100-1625 | 0 | 1 | INDUCTOR RF-CH-MLD 330H 5% .166DX.385LG | 28480 | 9100-1625 |
| A1L12 | 9100-3294 | 3 | 1 | INDUCTOR; VAR; 10.5 TURNS; BLK | 28480 | 9100-3294 |
| A1L13 | 9140-0421 | 6 | 1 | INDUCTOR-FIXED #30 AWG, 15-1/2 TURNS | 28480 | 9140-0421 |
| A1L20 | 9100-1626 | 1 | 2 | INDUCTOR RF-CH-MLD 360H 5% .166DX.385LG | 28480 | 9100-1626 |
| A1L21 | 9100-1626 | 1 | | INDUCTOR RF-CH-MLD 360H 5% .166DX.385LG | 28480 | 9100-1626 |
| A1I31 | 9140-0210 | 1 | 1 | INDUCTOR RF-CH-MLD 1000H 5% .166DX.385LG | 28480 | 9140-0210 |
| A1R1 | 0698-7363 | 0 | 1 | RESISTOR 75 1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-75R0-B |
| A1R2 | 0698-8154 | 0 | 1 | RESISTOR 75 1% .125W F TC=0+-25 | 02716 | BR5-1/8-T2-75R0-B |
| A1R3 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A1R4 | 0698-4351 | 1 | 2 | RESISTOR 10.5 1% .125W F TC=0+-100 | 03888 | PME55-108-T0-10R5-F |
| A1R5 | 0698-4351 | 1 | | RESISTOR 10.5 1% .125W F TC=0+-100 | 03888 | PME55-108-T0-10R5-F |
| A1R6 | 0698-4350 | 0 | 2 | RESISTOR 10.2 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-10R2-F |
| A1R7 | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453R-F |
| A1R8 | 0698-4350 | 0 | 1 | RESISTOR 10.2 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-10R2-F |
| A1R10 | 0757-0381 | 5 | 4 | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A1R11 | 0757-0381 | 5 | | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A1R12 | 0757-0381 | 5 | | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A1R13 | 0757-0381 | 5 | | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A1R14 | 0757-0274 | 5 | 1 | RESISTOR 1.21K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1211-F |
| A1R15 | 2100-3211 | 7 | 1 | RESISTOR-TRMR 1K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3211 |
| A1R16 | 0757-0801 | 4 | 1 | RESISTOR 150 1% .5W F TC=0+-100 | 28480 | 0757-0801 |
| A1R17 | 0757-0398 | 4 | 1 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A1R21 | 0698-4450 | 1 | 2 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R22 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R23 | 0698-4450 | 1 | | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R24 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R25 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R26 | 0698-3226 | 7 | 1 | RESISTOR 6.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6491-F |
| A1R27 | 0698-3382 | 6 | 1 | RESISTOR 5.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5491-F |
| A1R31 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A1R32 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A1R33 | 0811-3079 | 0 | 1 | RESISTOR .51 5% .5W PW TC=0+-300 | 75042 | 8W20-1/2-33/64-J |
| A1T10 | 9100-0471 | 2 | 1 | TRANSFORMER BALUN, 11 TURNS BTFILAR | 28480 | 9100-0471 |
| A1T11 | 9100-0473 | 4 | 1 | TRANSFORMER 150 OHM BALUN, 21 TURNS | 28480 | 9100-0473 |
| A1T20 | 9100-0459 | 6 | 1 | TRANSFORMER-AUDIO IND PINS 7-8 12 HY @ | 28480 | 9100-0459 |
| A1U31 | 1820-1433 | 6 | 1 | IC SHF-RCIR TTL LS R-S SERIAL-IN PUL-OUT | 01295 | SN74LS164N |
| A1U32 | 1858-0047 | 5 | 1 | TRANSISTOR ARRAY 16-PIN PLSTC DIP | 13606 | ULN-2003A |
| A1U32 | 1200-0607 | 0 | 1 | SOCKET-IC 16-CONT DIP-DIP-SLDR | 28480 | 1200-0607 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|----------------------|
| A1 | 03586-66506**8 | | 1 | INPUT MULTIPLEXER (3586A) **DOES NOT INCLUDE ALUMINUM BOX, COVER, OR BOX-MOUNTED CONNECTORS UNDER THIS NUMBER. | 28480 | 03586-66506 |
| A1C1 | 0160-2199 | 2 | 2 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C2 | 0121-0114 | 5 | 1 | CAPACITOR-V TRMR-CER 7-25PF 350V PC-MTG | 52763 | 304322 7/25PF N300 |
| A1C3 | 0160-2199 | 2 | 1 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C11 | 0160-0128 | 3 | 3 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C12 | 0160-0128 | 3 | 3 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C13 | 0160-2222 | 2 | 1 | CAPACITOR-FXD 1500PF +-5% 300VDC MICA | 28480 | 0160-2222 |
| A1C20 | 0180-2735 | 4 | 2 | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C21 | 0180-2735 | 4 | 1 | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C22 | 0121-0178 | 1 | 1 | CAPACITOR-V TRMR-CER 15-60PF 200V | 52763 | 304322 15/60PF N1500 |
| A1C23 | 0140-0198 | 5 | 1 | CAPACITOR-FXD 200PF +-5% 300VDC MICA | 727136 | DM15F201J0300WV1CR |
| A1C31 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A1C32 | 0160-0134 | 1 | 1 | CAPACITOR-FXD 220PF +-5% 300VDC MICA | 28480 | 0160-0134 |
| A1C33 | 0160-0128 | 3 | 1 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C34 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A1C35 | 0160-3879 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A1J1 | 1250-1637 | 3 | 1 | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A1J2 | 1251-3192 | 1 | 1 | CONNECTOR 3-PIN M POST TYPE | 28480 | 1251-3192 |
| A1J3 | 1250-1676 | 0 | 1 | CONNECTOR-BNC (3586A STANDARD) | 28480 | 1250-1676 |
| A1J3 | 1250-1076 | 4 | 1 | CONNECTOR-SIEMENS (3586A OPTION 001) | 28480 | 1250-1076 |
| A1J4 | 1251-5586 | 1 | 2 | JACK-RNA TRIPLE BLK SLDR-LUG-TERM | 28480 | 1251-5586 |
| A1J5 | 1251-5586 | 1 | | JACK-RNA TRIPLE BLK SLDR-LUG-TERM | 28480 | 1251-5586 |
| A1K1 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K2 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K3 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K4 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K5 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1L1 | 9140-0422 | 2 | 1 | INDUCTOR-FIXED #28 AWG, 7-1/2 TURNS | 28480 | 9140-0422 |
| A1L12 | 9100-3294 | 3 | 1 | INDUCTOR; VAR; 10.5 TURNS; BLK | 28480 | 9100-3294 |
| A1L20 | 9100-1626 | 1 | 2 | INDUCTOR RF-CH-MLD 36UH 5% .166DX.385LG | 28480 | 9100-1626 |
| A1L21 | 9100-1626 | 1 | | INDUCTOR RF-CH-MLD 36UH 5% .166DX.385LG | 28480 | 9100-1626 |
| A1L31 | 9100-1618 | 1 | 1 | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A1R1 | 0698-7363 | 1 | 1 | RESISTOR 75 .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-75R0-B |
| A1R2 | 0698-8154 | 0 | 1 | RESISTOR 75 .1% 1W F TC=0+-25 | 07716 | BR5-1-T9-75R0-B |
| A1R3 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A1R10 | 0757-0291 | 6 | 2 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A1R11 | 0757-0291 | 6 | | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A1R14 | 0698-3122 | 2 | 1 | RESISTOR 412 1% .125W F TC=0+-100 | 03888 | PHE55-1/8-T0-4120-F |
| A1R15 | 2100-3383 | 4 | 1 | RESISTOR-TRMR 50 10% C TOP-ADJ 1-TRN | 28480 | 2100-3383 |
| A1R16 | 0757-0801 | 4 | 1 | RESISTOR 150 1% .5W F TC=0+-100 | 28480 | 0757-0801 |
| A1R17 | 0757-0398 | 4 | 1 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A1R21 | 0698-4450 | 1 | 2 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R22 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R23 | 0698-4450 | 1 | | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R24 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R25 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A1R26 | 0698-3226 | 7 | 1 | RESISTOR 6.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6491-F |
| A1R27 | 0698-3382 | 6 | 1 | RESISTOR 5.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5491-F |
| A1R31 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A1R32 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A1R33 | 0811-3079 | 0 | 1 | RESISTOR .51 5% .5W PW TC=0+-300 | 75042 | BW20-1/2-33/64-J |
| A1T10 | 9100-0471 | 2 | 1 | TRANSFORMER BALUN, 11 TURNS BIFILAR | 28480 | 9100-0471 |
| A1T11 | 9100-0473 | 4 | 1 | TRANSFORMER 150 OHM BALUN, 21 TURNS | 28480 | 9100-0473 |
| A1T20 | 9100-0459 | 6 | 1 | TRANSFORMER-AUDIO IND PINS 7-8 12 HY @ | 28480 | 9100-0459 |
| A1U31 | 1820-1433 | 6 | 1 | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A1U32 | 1858-0047 | 5 | 1 | TRANSISTOR ARRAY 16-PIN PLSTC DIP | 13606 | ULN-2003A |
| | 1200-0607 | 0 | 1 | SOCKET-IC 16-CONT DIP DIP-SLDR | 28480 | 1200-0607 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|----------------------|
| A1 | 03586-66507**9 | | 1 | INPUT MULTIPLEXER (3586C) **DOES NOT INCLUDE ALUMINUM BOX, COVER, -OR BOX-MOUNTED CONNECTORS UNDER THIS NUMBER. | 28480 | 03586-66507 |
| A1C1 | 0160-2199 | 2 | 2 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C2 | 0121-0114 | 5 | 1 | CAPACITOR-V TRMR-CER 7.25PF 350V PC-MTG | 52763 | 304322 7/25PF N300 |
| A1C3 | 0160-2199 | 2 | 3 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A1C4 | 0121-0451 | 3 | 1 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A1C20 | 0180-2735 | 4 | 2 | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C21 | 0180-2735 | 4 | 1 | CAPACITOR-FXD 100UF+100-10% 63VDC AL | 28480 | 0180-2735 |
| A1C22 | 0121-0170 | 1 | 1 | CAPACITOR-V TRMR-CER 15.60PF 200V | 52763 | 304322 15/60PF N1500 |
| A1C23 | 0140-0199 | 5 | 1 | CAPACITOR-FXD 200PF +-5% 300VDC MICA | 72136 | DM15F201J0300WV1CR |
| A1C31 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A1C32 | 0160-0134 | 1 | 1 | CAPACITOR-FXD 220PF +-5% 300VDC MICA | 28480 | 0160-0134 |
| A1C33 | 0160-0128 | 3 | 1 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A1C34 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A1C35 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A1C36 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A1J1 | 1250-1637 | 3 | 1 | CONNECTOR-RF 5M-5NP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A1J2 | 1251-3192 | 1 | 1 | CONNECTOR 3-PIN M POST TYPE | 28480 | 1251-3192 |
| A1J3 | 1250-1676 | 0 | 1 | CONNECTOR-RF BNC M SPCL-MTG 75-OHM | 28480 | 1250-1676 |
| A1J4 | 1510-0542 | 9 | 1 | BINDING POST-BLACK | 28480 | 1510-0542 |
| A1J4 | 1510-0543 | 0 | 1 | BINDING POST, RED | 28480 | 1510-0543 |
| A1K1 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K2 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K3 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K4 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1K5 | 0490-1318 | 4 | 5 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A1L1 | 9140-0437 | 4 | 1 | COIL, VARIABLE | 28480 | 9140-0437 |
| A1L2 | 9140-0422 | 7 | 1 | INDUCTOR-FIXED #28 AWG, 7-1/2 TURNS | 28480 | 9140-0422 |
| A1L20 | 9100-1626 | 1 | 2 | INDUCTOR RF-CH-MLD 36UH 5% .166DX.385LG | 28480 | 9100-1626 |
| A1L21 | 9100-1626 | 1 | 2 | INDUCTOR RF-CH-MLD 36UH 5% .166DX.385LG | 28480 | 9100-1626 |
| A1L31 | 9100-1618 | 1 | 1 | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A1R1 | 0757-0284 | 7 | 1 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A1R2 | 0698-7363 | 1 | 1 | RESISTOR 75 .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-75R0-B |
| A1R3 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A1R4 | 0698-8154 | 0 | 1 | RESISTOR 75 .1% 1W F TC=0+-25 | 07716 | BR5-1-T9-75R0-B |
| A1R21 | 0698-4450 | 1 | 2 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R22 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CR1055 |
| A1R23 | 0698-4450 | 1 | 3 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A1R24 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CR1055 |
| A1R25 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CR1055 |
| A1R26 | 0698-3226 | 7 | 1 | RESISTOR 6.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6491-F |
| A1R27 | 0698-3250 | 5 | 1 | RESISTOR 5.36K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5361-F |
| A1R28 | 2100-3212 | 8 | 1 | RESISTOR-TRMR 200 10% C TOP-ADJ 1-TRN | 28480 | 2100-3212 |
| A1R31 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CR4725 |
| A1R32 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CR1015 |
| A1R33 | 0811-3079 | 0 | 1 | RESISTOR .51 5% .5W PW TC=0+-300 | 75042 | BW20-1/2-33/64-J |
| A1T20 | 9100-0459 | 6 | 1 | TRANSFORMER-AUDIO IND PINS 7-8 12 HY R | 28480 | 9100-0459 |
| A1U31 | 1820-1433 | 6 | 1 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A1U32 | 1858-0047 | 5 | 1 | TRANSISTOR ARRAY 16-PIN PLSTC DIP | 13606 | ULN-2003A |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|----------------------|
| A2 | 03586-66502 | 4 | 1 | INPUT AMPLIFIER (3586A/B) | 28480 | 03586-66502 |
| A2C1 | 0160-0128 | 3 | 10 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C2 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C3 | 0160-2241 | 5 | 1 | CAPACITOR-FXD 2.2PF +- .25PF 500VDC CER | 28480 | 0160-2241 |
| A2C4 | 0121-0451 | 3 | 2 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A2C5 | 0121-0178 | 1 | 1 | CAPACITOR-V TRMR-CER 15-60PF 200V | 52763 | 304322 15/60PF N1500 |
| A2C6 | 0160-4802 | 8 | 1 | CAPACITOR-FXD 82PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4802 |
| A2C7 | 0121-0455 | 7 | 2 | CAPACITOR-V TRMR-AIR 1.9-15.7PF 175V | 74970 | 187-0109-028 |
| A2C8 | 0160-0576 | 5 | 12 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C10 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C11 | 0160-5348 | 9 | 1 | CAPACITOR-FXD 51PF +-5% 100VDC CER 0+-30 | 28480 | 0160-5348 |
| A2C12 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C13 | 0180-0229 | 7 | 2 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X9010B2 |
| A2C14 | 0160-0576 | 9 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C15 | 0180-0106 | 7 | 2 | CAPACITOR-FXD 60UF+-20% 6VDC TA | 56289 | 150D606X0006B2 |
| A2C16 | 0160-5350 | 3 | 1 | CAPACITOR-FXD 300PF +-5% 100VDC CER | 28480 | 0160-5350 |
| A2C17 | 0160-4823 | 3 | 1 | CAPACITOR-FXD 820PF +-5% 100VDC CER | 28480 | 0160-4823 |
| A2C20 | 0160-3874 | 2 | 2 | CAPACITOR-FXD 10PF +- .5PF 200VDC CER | 28480 | 0160-3874 |
| A2C21 | 0160-3872 | 0 | 2 | CAPACITOR-FXD 2.2PF +- .25PF 200VDC CER | 28480 | 0160-3872 |
| A2C22 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C23 | 0160-3874 | 2 | 2 | CAPACITOR-FXD 10PF +- .5PF 200VDC CER | 28480 | 0160-3874 |
| A2C24 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C25 | 0180-0229 | 7 | | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X9010B2 |
| A2C26 | 0160-3872 | 0 | | CAPACITOR-FXD 2.2PF +- .25PF 200VDC CER | 28480 | 0160-3872 |
| A2C30 | 0180-0106 | 7 | | CAPACITOR-FXD 60UF+-20% 6VDC TA | 56289 | 150D606X0006B2 |
| A2C31 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C32 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A2C33 | 0121-0455 | 7 | | CAPACITOR-V TRMR-AIR 1.9-15.7PF 175V | 74970 | 187-0109-028 |
| A2C40 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C41 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C42 | 0180-0228 | 6 | 4 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C43 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C44 | 0160-3877 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3877 |
| A2C45 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C46 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C47 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C60 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C61 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A2C62 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C63 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A2C64 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C65 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C66 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C67 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C80 | 0160-4557 | 0 | 2 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16279 | CAC04X7R104M050A |
| A2C81 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C82 | 0160-5349 | 0 | 1 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A2C85 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C86 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C87 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A2C90 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16279 | CAC04X7R104M050A |
| A2C100 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2CR1 | 1901-0025 | 2 | 8 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR2 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR3 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR4 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR5 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR6 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR7 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N825 6.2V 5% DO-7 PD=.4W | 04713 | 1N825 |
| A2CR8 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR9 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2J1 | 1250-1637 | 3 | 2 | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A2J2 | 1250-1637 | 3 | | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A2J3 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMR M PC 50-OHM | 28480 | 1250-1512 |
| A2K1 | 0490-1318 | 4 | 3 | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K2 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K3 | 0490-1318 | 4 | | RELAY 2C 12VDC-COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K4 | 0490-1221 | 8 | 1 | RELAY-REED 1A 500MA 200VDC 12VDC-COIL | 28480 | 0490-1221 |
| A2L1 | 9100-2486 | 3 | 1 | INDUCTOR RF-CH-MLD 330NH 5% .166DX.385LG | 28480 | 9100-2486 |
| A2L3 | 9140-0265 | 6 | 1 | INDUCTOR RF-CH-MLD 1.6UH 5% .166DX.385LG | 28480 | 9140-0265 |
| A2L4 | 9100-1618 | 1 | 5 | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L5 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L6 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|---------------------|
| A2L7 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L8 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2Q1 | 1855-0410 | 0 | 1 | TRANSISTOR J-FET N-CHAN D-MODE TO-18 SI | 28480 | 1855-0410 |
| A2Q1 | 9170-0894 | 0 | | CORE-SHIELDING BEAD | 28480 | 9170-0894 |
| A2Q2 | 1853-0354 | 7 | 5 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q3 | 1854-0305 | 0 | 2 | TRANSISTOR NPN SI TO-18 PD=400MW | 28480 | 1854-0305 |
| A2Q4 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q5 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q6 | 1854-0305 | 0 | | TRANSISTOR NPN SI TO-18 PD=400MW | 28480 | 1854-0305 |
| A2Q7 | 1854-0092 | 2 | 1 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A2Q10 | 1854-0795 | 2 | 3 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q11 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q12 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q13 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q14 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q20 | 1853-0051 | 1 | 1 | TRANSISTOR PNP 2N4037 SI TO-5 PD=1W | 3L585 | 2N4037 |
| A2Q21 | 1054-0039 | 7 | 1 | TRANSISTOR NPN 2N3053S SI TO-39 PD=1W | 3L585 | 2N3053S |
| A2R1 | 0698-3438 | 3 | 1 | RESISTOR 147 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-147R-F |
| A2R2 | 0699-0057 | 8 | 1 | RESISTOR 9K .1% .1W F TC=0+-5 | 28480 | 0699-0057 |
| A2R3 | 0698-5453 | 6 | 1 | RESISTOR 900 .1% .125W F TC=0+-50 | 03888 | PME55 T-2-900R-B |
| A2R4 | 0698-7448 | 3 | 1 | RESISTOR 100 .1% .25W F TC=0+-25 | 19701 | MF52C1/4-T2-100R-B |
| A2R5 | 2100-3212 | 8 | 1 | RESISTOR-TRMR 200 10% C TOP-ADJ 1-TRN | 28480 | 2100-3212 |
| A2R10 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A2R11 | 0757-0275 | 6 | 1 | RESISTOR 113 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-113R-F |
| A2R12 | 2100-3103 | 6 | 1 | RESISTOR-TRMR 10K 10% C SIDE-ADJ 17-TRN | 02111 | 43P103 |
| A2R13 | 0698-4421 | 6 | 2 | RESISTOR 249 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-249R-F |
| A2R14 | 0757-0439 | 4 | 2 | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A2R15 | 0683-3055 | 9 | 1 | RESISTOR 3M 5% .25W FC TC=-900/+1100 | 01121 | CB3055 |
| A2R16 | 0757-0402 | 1 | 1 | RESISTOR 110 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-111-F |
| A2R17 | 0757-0465 | 6 | 2 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-100K-F |
| A2R18 | 0757-0465 | 6 | 2 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-100K-F |
| A2R19 | 0757-0438 | 3 | 4 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R20 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R30 | 0683-4705 | 8 | 8 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R31 | 0698-4374 | 8 | 2 | RESISTOR 29.4 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-29R4-F |
| A2R32 | 0698-4386 | 2 | 1 | RESISTOR 59 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-59R0-F |
| A2R33 | 0698-4374 | 8 | 1 | RESISTOR 29.4 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-29R4-F |
| A2R34 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R35 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R36 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R37 | 0757-0437 | 2 | 1 | RESISTOR 4.75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4751-F |
| A2R38 | 0698-3178 | 8 | 1 | RESISTOR 487 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-487R-F |
| A2R39 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R40 | 0757-0346 | 2 | 3 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A2R41 | 0757-0403 | 2 | 1 | RESISTOR 121 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-121R-F |
| A2R42 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A2R49 | 0757-0424 | 7 | 1 | RESISTOR 1.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1101-F |
| A2R50 | 0698-4421 | 6 | | RESISTOR 249 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-249R-F |
| A2R51 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R52 | 0698-4445 | 4 | 1 | RESISTOR 5.76K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5761-F |
| A2R53 | 0757-0439 | 4 | | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A2R54 | 0698-3122 | 2 | 1 | RESISTOR 412 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-412R-F |
| A2R55 | 0698-3488 | 3 | 1 | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-442R-F |
| A2R56 | 0757-0280 | 3 | 3 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R57 | 0683-3625 | 9 | 1 | RESISTOR 3.6K 5% .25W FC TC=-400/+700 | 01121 | CB3625 |
| A2R58 | 0683-1525 | 4 | 1 | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A2R60 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R61 | 0698-4484 | 1 | 2 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A2R62 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R63 | 0683-1015 | 7 | 3 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R64 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R65 | 0698-4450 | 1 | 2 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A2R66 | 0698-3518 | 0 | 2 | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A2R67 | 0757-0421 | 4 | 2 | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-825R-F |
| A2R68 | 0698-4402 | 3 | 2 | RESISTOR 97.6 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-97R6-F |
| A2R69 | 0698-3518 | 0 | | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A2R79 | 0757-0421 | 4 | | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-825R-F |
| A2R80 | 0698-4381 | 7 | 1 | RESISTOR 48.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-48R7-F |
| A2R81 | 0698-4402 | 3 | | RESISTOR 97.6 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-97R6-F |
| A2R82 | 0698-4484 | 1 | | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A2R83 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R84 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R85 | 0683-2425 | 5 | 1 | RESISTOR 2.4K 5% .25W FC TC=-400/+700 | 01121 | CB2425 |
| A2R86 | 0698-4450 | 1 | | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A2R100 | 0683-5115 | 6 | 2 | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| A2R101 | 0683-0475 | 1 | 1 | RESISTOR 4.7 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R102 | 0683-2025 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|--|----------|------------------|
| A2R103 | 0757-0420 | 3 | 1 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-751-F |
| A2R104 | 0757-0416 | 7 | 1 | RESISTOR 511 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-511R-F |
| A2R105 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A2R106 | 0698-3223 | 4 | 1 | RESISTOR 1.24K 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-1241-F |
| A2R107 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-5111-F |
| A2R108 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-5111-F |
| A2R109 | 0683-0625 | 3 | 3 | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R110 | 0683-5115 | 6 | | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| A2R111 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A2R112 | 0683-1035 | 1 | 3 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R113 | 0683-0625 | 3 | | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R114 | 0683-0625 | 3 | | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R120 | 0683-4715 | 0 | 4 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R121 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R122 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R123 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R125 | 0683-4725 | 2 | 5 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R126 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R127 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R130 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R131 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R132 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R133 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A2R140 | 0683-1835 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R141 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R142 | 0683-0335 | 2 | 4 | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R143 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R144 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R145 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R150 | 0757-0277 | 8 | 1 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-4992-F |
| A2R151 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/B-T0-10R0-F |
| A2U1 | 1826-0111 | 7 | 2 | IC OP AMP GP DUAL T0-99 PKG | 3L585 | CA1458T |
| A2U2 | 1826-0111 | 7 | | IC OP AMP GP DUAL T0-99 PKG | 3L585 | CA1458T |
| A2U3 | 1858-0047 | 5 | 1 | TRANSJTOR ARRAY 16-PIN PLSTC DTP | 13606 | ULN-2003A |
| A2U4 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A2U5 | 1820-1433 | 6 | 1 | IC SHF-RCTR TTL 1S R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| | 9170-0894 | 0 | 2 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|----------------------|
| A2 | 03586-66503 | 5 | 1 | INPUT AMPLIFIER (3586C) | 28480 | 03586-66503 |
| A2C1 | 0160-0128 | 3 | 10 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C2 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C3 | 0160-2241 | 5 | 1 | CAPACITOR-FXD 2.2PF +--.25PF 500VDC CER | 28480 | 0160-2241 |
| A2C4 | 0121-0451 | 3 | 2 | CAPACITOR-V TRMR-ATR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A2C5 | 0121-0178 | 1 | 1 | CAPACITOR-V TRMR-CER 15-60PF 200V | 52763 | 304322 15/60PF N1500 |
| A2C6 | 0160-4802 | 8 | 1 | CAPACITOR-FXD 82PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4802 |
| A2C7 | 0121-0455 | 7 | 2 | CAPACITOR-V TRMR-ATR 1.9-15.7PF 175V | 74970 | 187-0109-028 |
| A2C8 | 0160-0576 | 5 | 12 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C10 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C11 | 0160-5348 | 9 | 1 | CAPACITOR-FXD 51PF +-5% 100VDC CER 0+-30 | 28480 | 0160-5348 |
| A2C12 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C13 | 0180-0227 | 7 | 2 | CAPACITOR-FXD 330F+-10% 18VDC TA | 56289 | 150D336X9010B2 |
| A2C14 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C15 | 0180-0106 | 9 | 2 | CAPACITOR-FXD 600F+-20% 6VDC TA | 56289 | 150D606X0006B2 |
| A2C16 | 0160-5350 | 3 | 1 | CAPACITOR-FXD 300PF +-5% 100VDC CER | 28480 | 0160-5350 |
| A2C17 | 0160-4823 | 3 | 1 | CAPACITOR-FXD 820PF +-5% 100VDC CER | 28480 | 0160-4823 |
| A2C20 | 0160-3874 | 2 | 2 | CAPACITOR-FXD 10PF +--.5PF 200VDC CER | 28480 | 0160-3874 |
| A2C21 | 0160-3872 | 0 | 2 | CAPACITOR-FXD 2.2PF +--.25PF 200VDC CER | 28480 | 0160-3872 |
| A2C22 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C23 | 0160-3874 | 2 | | CAPACITOR-FXD 10PF +--.5PF 200VDC CER | 28480 | 0160-3874 |
| A2C24 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C25 | 0180-0229 | 7 | | CAPACITOR-FXD 330F+-10% 18VDC TA | 56289 | 150D336X9010B2 |
| A2C26 | 0160-3872 | 0 | | CAPACITOR-FXD 2.2PF +--.25PF 200VDC CER | 28480 | 0160-3872 |
| A2C30 | 0180-0106 | 9 | | CAPACITOR-FXD 600F+-20% 6VDC TA | 56289 | 150D606X0006B2 |
| A2C31 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C32 | 0121-0451 | 3 | | CAPACITOR-V TRMR-ATR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A2C33 | 0121-0455 | 7 | | CAPACITOR-V TRMR-ATR 1.9-15.7PF 175V | 74970 | 187-0109-028 |
| A2C40 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C41 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C42 | 0180-0228 | 6 | 4 | CAPACITOR-FXD 220F+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C43 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C44 | 0160-3879 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A2C45 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C46 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C47 | 0180-0228 | 6 | | CAPACITOR-FXD 220F+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C60 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C61 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 150F+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A2C62 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C63 | 0180-1746 | 5 | | CAPACITOR-FXD 150F+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A2C64 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C65 | 0180-0228 | 6 | | CAPACITOR-FXD 220F+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C66 | 0180-0228 | 6 | | CAPACITOR-FXD 220F+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A2C67 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A2C80 | 0160-4557 | 0 | 2 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A2C81 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C82 | 0160-5349 | 0 | 1 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A2C85 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C86 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2C87 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A2C90 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A2C100 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A2CR1 | 1901-0025 | 2 | 8 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR2 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR3 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR4 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR5 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR6 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR7 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N825 6.2V 5% DO-7 PD=.4W | 04713 | 1N825 |
| A2CR8 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2CR9 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A2J1 | 1250-1637 | 3 | 2 | CONNECTOR-RF SM-SND M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A2J2 | 1250-1637 | 3 | | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A2J3 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMD M PC 50-OHM | 28480 | 1250-1512 |
| A2K1 | 0490-1318 | 4 | 3 | RELAY 2C 12VDC COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K2 | 0490-1318 | 4 | | RELAY 2C 12VDC COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K3 | 0490-1318 | 4 | | RELAY 2C 12VDC COIL .5A 28VDC | 28480 | 0490-1318 |
| A2K4 | 0490-1221 | 8 | 1 | RELAY-RECD 1A 500MA 280VDC 12VDC COIL | 28480 | 0490-1221 |
| A2L1 | 9100-2486 | 3 | 1 | INDUCTOR RF-CH-MLD 330NH 5% .166DX.385LG | 28480 | 9100-2486 |
| A2L3 | 9140-0265 | 6 | 1 | INDUCTOR RF-CH-MLD 1.6UH 5% .166DX.385LG | 28480 | 9140-0265 |
| A2L4 | 9100-1618 | 1 | 5 | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L5 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L6 | 9100-1618 | 1 | | INDUCTOR RF-CH-MLD 5.6UH 10% | 28480 | 9100-1618 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|---------------------|
| A2L7 | 9100-1618 | 1 | | INDUCTOR RF-CM MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2L8 | 9100-1618 | 1 | | INDUCTOR RF-CM MLD 5.6UH 10% | 28480 | 9100-1618 |
| A2Q1 | 1855-0410 | 0 | 1 | TRANSISTOR J-FET N-CHAN D-MODE TO-18 SI | 28480 | 1855-0410 |
| A2Q1 | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |
| A2Q2 | 1853-0354 | 7 | 5 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q3 | 1854-0305 | 0 | 2 | TRANSISTOR NPN SI TO-18 PD=400MW | 28480 | 1854-0305 |
| A2Q4 | 1853-0354 | 7 | 7 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q5 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q6 | 1854-0305 | 0 | | TRANSISTOR NPN SI TO-18 PD=400MW | 28480 | 1854-0305 |
| A2Q7 | 1854-0092 | 2 | 1 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A2Q10 | 1854-0795 | 2 | 3 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q11 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q12 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A2Q13 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q14 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A2Q20 | 1853-0051 | 1 | 1 | TRANSISTOR PNP 2N4037 SI TO-5 PD=1W | 3L585 | 2N4037 |
| A2Q21 | 1854-0032 | 7 | 1 | TRANSISTOR NPN 2N3053S SI TO-39 PD=1W | 3L585 | 2N3053S |
| A2R1 | 0698-3438 | 3 | 1 | RESISTOR 147 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-147R-F |
| A2R2 | 0699-0057 | 8 | 1 | RESISTOR 2K .1% .1W F TC=0+ 5 | 28480 | 0699-0057 |
| A2R3 | 0698-5453 | 6 | 1 | RESISTOR 900 .1% .125W F TC=0+-50 | 03888 | PMF55 T-2-900R-B |
| A2R4 | 0698-7448 | 3 | 1 | RESISTOR 100 .1% .125W F TC=0+-25 | 19701 | MF52C1/4-T9-100R-D |
| A2R5 | 2100-3212 | 8 | 1 | RESISTOR-TRMR 200 10% C TOP-ADJ 1-TRN | 28480 | 2100-3212 |
| APR10 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 81121 | CB1005 |
| APR11 | 0757-0275 | 6 | 1 | RESISTOR 113 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-113R-F |
| APR12 | 2100-3103 | 6 | 1 | RESISTOR-TRMR 10K 10% C SIDE-ADJ 17-TRN | 02111 | 43P103 |
| APR13 | 0698-4421 | 6 | 2 | RESISTOR 249 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-249R-F |
| APR14 | 0757-0439 | 4 | 2 | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| APR15 | 0683-3055 | 9 | 1 | RESISTOR 3M 5% .25W FC TC=-900/+1100 | 81121 | CB3055 |
| APR16 | 0757-0404 | 3 | 1 | RESISTOR 130 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-131-F |
| APR17 | 0757-0465 | 6 | 2 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| APR18 | 0757-0465 | 6 | 6 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| APR19 | 0757-0438 | 3 | 4 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R20 | 0757-0438 | 3 | 8 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R30 | 0683-4705 | 8 | 8 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R31 | 0498-4391 | 9 | 2 | RESISTOR 69.8 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-698R-F |
| A2R32 | 0757-0402 | 1 | 1 | RESISTOR 110 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-111-F |
| A2R33 | 0698-4391 | 7 | | RESISTOR 69.8 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-698R-F |
| A2R34 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R35 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R36 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R37 | 0757-0437 | 2 | 1 | RESISTOR 4.75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4751-F |
| A2R38 | 0698-4453 | 4 | 1 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A2R39 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R40 | 0757-0346 | 2 | 3 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R-F |
| A2R41 | 0757-0403 | 2 | 1 | RESISTOR 121 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-121R-F |
| A2R42 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R-F |
| A2R49 | 0757-0424 | 7 | 1 | RESISTOR 1.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1101-F |
| A2R50 | 0698-4421 | 6 | | RESISTOR 249 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-249R-F |
| A2R51 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R52 | 0698-4445 | 4 | 1 | RESISTOR 5.76K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5761-F |
| A2R53 | 0757-0437 | 4 | | RESISTOR 4.75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4751-F |
| A2R54 | 0698-3122 | 2 | 1 | RESISTOR 412 1% .125W F TC=0+-100 | 03888 | PMF55-1/8-T0-4120-F |
| A2R55 | 0698-3488 | 3 | 1 | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-442R-F |
| A2R56 | 0757-0280 | 3 | 3 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R57 | 0683-3625 | 9 | 1 | RESISTOR 3.6K 5% .25W FC TC=-400/+700 | 01121 | CB3625 |
| A2R58 | 0683-1525 | 4 | 1 | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A2R60 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R61 | 0698-4484 | 1 | 2 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A2R62 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R63 | 0683-1015 | 7 | 3 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R64 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A2R65 | 0698-4450 | 1 | 2 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A2R66 | 0698-3518 | 0 | 2 | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A2R67 | 0757-0421 | 4 | 2 | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-825R-F |
| A2R68 | 0698-4402 | 3 | 2 | RESISTOR 97.6 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-976R-F |
| A2R69 | 0698-3518 | 0 | | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A2R79 | 0757-0421 | 4 | | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-825R-F |
| A2R89 | 0698-4381 | 7 | 1 | RESISTOR 48.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-487R-F |
| A2R81 | 0698-4402 | 3 | | RESISTOR 97.6 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-976R-F |
| A2R82 | 0698-4404 | 1 | | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A2R83 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A2R84 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R85 | 0683-2425 | 5 | 1 | RESISTOR 2.4K 5% .25W FC TC=-400/+700 | 01121 | CB2425 |
| A2R86 | 0698-4450 | 1 | | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A2R100 | 0683-5115 | 6 | 2 | RESISTOR 510 5% .25W FC TC=-400/+500 | 01121 | CB5115 |
| APR101 | 0683-0475 | 1 | 1 | RESISTOR 4.7 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| APR102 | 0683-2025 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A2R103 | 0757-0420 | 3 | 1 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A2R104 | 0757-0416 | 7 | 1 | RESISTOR 511 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-511R-F |
| A2R105 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A2R106 | 0698-3223 | 4 | 1 | RESISTOR 1.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1241-F |
| A2R107 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R108 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A2R109 | 0683-0625 | 3 | 3 | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R110 | 0683-5115 | 6 | | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| A2R111 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A2R112 | 0683-1035 | 1 | 3 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R113 | 0683-0625 | 3 | | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R114 | 0683-0625 | 3 | | RESISTOR 6.2 5% .25W FC TC=-400/+500 | 01121 | CB6265 |
| A2R120 | 0683-4715 | 0 | 4 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R121 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R122 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R123 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A2R125 | 0683-4725 | 2 | 5 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R126 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R127 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A2R130 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R131 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R132 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A2R133 | 0683-1025 | 7 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A2R140 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R141 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A2R142 | 0683-0335 | 2 | 4 | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R143 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R144 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R145 | 0683-0335 | 2 | | RESISTOR 3.3 5% .25W FC TC=-400/+500 | 01121 | CB3365 |
| A2R150 | 0757-0277 | 8 | 1 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A2R151 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A2U1 | 1826-0111 | 7 | 2 | IC OP AMP GP DUAL T0-99 PKG | 3L585 | CA1458T |
| A2U2 | 1826-0111 | 7 | | IC OP AMP GP DUAL T0-99 PKG | 3L585 | CA1458T |
| A2U3 | 1858-0047 | 5 | 1 | TRANSISTOR ARRAY 16-PIN PLSTC DIP | 13686 | ULN-2003A |
| A2U4 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A2U5 | 1820-1433 | 6 | 1 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A4 | 03506-66504 | 6 | 1 | BROADBAND POWER/OVERLOAD/CALIBRATION (3506A/B) | 28480 | 03506-66504 |
| A4C1 | 0160-3879 | 7 | 15 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C2 | 0160-0127 | 2 | 2 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A4C3 | 0160-0576 | 5 | 18 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C4 | 0180-0228 | 6 | 4 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C5 | 0160-0158 | 9 | 1 | CAPACITOR-FXD 5600PF +-10% 200VDC POLYE | 28480 | 0160-0158 |
| A4C6 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C7 | 0160-0363 | 8 | 1 | CAPACITOR-FXD 620PF +-5% 300VDC MICA | 28480 | 0160-0363 |
| A4C8 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C9 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C10 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C11 | 0180-0309 | 4 | | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C12 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C13 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C14 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C15 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C16 | 0140-0193 | 0 | 1 | CAPACITOR-FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300WV1CR |
| A4C17 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C18 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C19 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C21 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C22 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C23 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C24 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A4C25 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C26 | 0160-0128 | 3 | 4 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A4C27 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A4C28 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A4C29 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C30 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C31 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C32 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C33 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C35 | 0180-1734 | 5 | 1 | CAPACITOR-FXD 47UF+-10% 6VDC TA | 56289 | 150D476X9006B2 |
| A4C40 | 0160-0127 | 2 | | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A4C41 | 0180-0486 | 8 | 1 | CAPACITOR-FXD 10UF+-10% 20VDC TA | 28480 | 0180-0486 |
| A4C42 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C44 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C101 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C102 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A4C103 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A4C104 | 0180-0309 | 4 | | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C105 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C107 | 0160-0128 | 3 | | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A4C108 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C109 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C110* | 0140-0190 | 7 | 1 | CAPACITOR-FXD 39PF +-5% 300VDC MICA | 72136 | DM15F390J0300WV1CR |
| A4C110* | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-0196 |
| A4C110* | 0160-2198 | 1 | 1 | CAPACITOR-FXD 20PF +-5% 300VDC MICA | 28480 | 0160-2198 |
| A4C110* | 0160-2199 | 2 | 1 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A4C110* | 0160-2308 | 5 | 1 | CAPACITOR-FXD 36PF +-5% 300VDC MICA | 28480 | 0160-2308 |
| A4C111 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C112 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C113 | 0121-0036 | 0 | 1 | CAPACITOR-V TRMR CER 5.5-18PF 350V | 52763 | 394324 5.5/18PF NPO |
| A4C114 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A4C115 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C116 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C117 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C118 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C119 | 0180-0100 | 3 | 1 | CAPACITOR-FXD 4.7UF+-10% 35VDC TA | 56289 | 150D475X9035B2 |
| A4C120 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C121 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C124 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A4C125 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A4C126 | 0140-4382 | 9 | 1 | CAPACITOR-FXD 3.3PF +- .25PF 200VDC CER | 28480 | 0160-4382 |
| A4C127 | 0160-3874 | 2 | 1 | CAPACITOR-FXD 10PF +- .5PF 200VDC CER | 28480 | 0160-3874 |
| A4C128 | 0160-2940 | 1 | 1 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A4CR1 | 1901-0535 | 9 | 5 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR2 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR3 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR4 | 1901-0050 | 3 | 6 | DIODE-SWITCHING 80V 200MA 2NS DD-35 | 28480 | 1901-0050 |
| A4CR5 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DD-35 | 28480 | 1901-0050 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A4CR8 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR9 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR10 | 1901-0539 | 3 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR11 | 1901-0539 | 3 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR12 | 1901-0539 | 3 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR13 | 1901-0539 | 3 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR14 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR15 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR16 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR104 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR105 | 1902-0686 | 3 | 1 | DIODE-ZNR 6.2V 2% DO-7 PD=.4W TC=+.002% | 04713 | 1N825 |
| A4DS1 | 1990-0487 | 7 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4584 |
| A4DS2 | 1990-0436 | 6 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| A4J1 | 1250-1637 | 3 | 1 | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A4L1 | 9100-0539 | 3 | 4 | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L2 | 9100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L3 | 9100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L4 | 9100-3548 | 0 | 2 | INDUCTOR RF-CM-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A4L5 | 9100-3548 | 0 | | INDUCTOR RF-CM-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A4L105 | 9100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L106 | 9140-0411 | 4 | 1 | COIL-VAR 200NH-300NH PC-MTG | 28480 | 9140-0411 |
| A4Q1 | 1853-0010 | 2 | 1 | TRANSISTOR PNP SI TO-18 PD=360MW | 28480 | 1853-0010 |
| A4Q2 | 1853-0354 | 7 | 2 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A4Q3 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A4Q4 | 1854-0485 | 7 | 2 | TRANSISTOR NPN SI TO-104 PD=175MW | 28480 | 1854-0485 |
| A4Q5 | 1854-0485 | 7 | | TRANSISTOR NPN SI TO-104 PD=175MW | 28480 | 1854-0485 |
| A4Q6 | 1854-0071 | 7 | 5 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q7 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q8 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q101 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q102 | 1854-0795 | 2 | 4 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MP5H10 |
| A4Q103 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MP5H10 |
| A4Q104 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MP5H10 |
| A4Q105 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MP5H10 |
| A4Q106 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4R2 | 0683-5635 | 5 | 4 | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CR5635 |
| A4R3 | 0683-5635 | 5 | | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CR5635 |
| A4R4 | 0683-5125 | 8 | 1 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CR5125 |
| A4R5 | 0683-3325 | 6 | 3 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CR3325 |
| A4R6 | 0683-7525 | 6 | 1 | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CR7525 |
| A4R7 | 0683-2025 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A4R8 | 0683-4305 | 4 | 2 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CR4305 |
| A4R9 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CR4305 |
| A4R10 | 0683-5105 | 4 | 4 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CR5105 |
| A4R11 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CR5105 |
| A4R12 | 0683-2705 | 4 | 4 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CR2705 |
| A4R13 | 0683-3015 | 1 | 1 | RESISTOR 300 5% .25W FC TC=-400/+600 | 01121 | CR3015 |
| A4R14 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CR2705 |
| A4R15 | 0683-2435 | 7 | 3 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CR2435 |
| A4R16 | 0683-2435 | 7 | | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CR2435 |
| A4R17 | 0757-0410 | 1 | 1 | RESISTOR 301 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-301R-F |
| A4R18 | 0683-2035 | 3 | 1 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CR2035 |
| A4R19 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CR5105 |
| A4R20 | 0683-3625 | 9 | 1 | RESISTOR 3.6K 5% .25W FC TC=-400/+700 | 01121 | CR3625 |
| A4R21 | 0757-0407 | 6 | 1 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A4R22 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A4R23 | 0683-1035 | 1 | 14 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A4R24 | 2100-0552 | 3 | 1 | RESISTOR-TRMR 50 10% C SIDE-ADJ 1-TRN | 28480 | 2100-0552 |
| A4R25 | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453R-F |
| A4R26 | 0698-3497 | 4 | 2 | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A4R28 | 0757-0449 | 6 | 4 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R29 | 2100-3054 | 6 | 1 | RESISTOR-TRMR 50K 10% C SIDE-ADJ 17-TRN | 02111 | 43P503 |
| A4R30 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A4R31 | 0757-0421 | 4 | 1 | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-825R-F |
| A4R33 | 0698-4494 | 3 | 1 | RESISTOR 35.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3572-F |
| A4R34 | 0698-4476 | 1 | | RESISTOR 10.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1022-F |
| A4R35 | 0698-4468 | 1 | 1 | RESISTOR 1.13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1131-F |
| A4R36 | 0757-0280 | 3 | 4 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R37* | 0698-4475 | 0 | 1 | RESISTOR 7.76K 1% .125W F TC=0+-100 | 03689 | PHF55-1/8-T0-9761-F |
| A4R37* | 0698-4476 | 1 | 2 | RESISTOR 10.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1022-F |
| A4R37* | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A4R38 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R39 | 0757-0467 | 0 | 2 | RESISTOR 121K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1213-F |
| A4R40 | 0757-0467 | 8 | | RESISTOR 121K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1213-F |
| A4R41 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A4R42 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|-------------------|
| A4R43 | 0757-0457 | 8 | 1 | RESISTOR 56.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5622-F |
| A4R44 | 0757-0449 | 6 | 1 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R45 | 0757-0460 | 1 | 1 | RESISTOR 61.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6192-F |
| A4R46 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R47 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R48 | 0683-1055 | 5 | 1 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R49 | 0683-3325 | 6 | 1 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A4R50 | 0683-3325 | 6 | 1 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A4R52 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A4R53 | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |
| A4R54 | 0811-1780 | 6 | 1 | RESISTOR 1K 5% .25W PWM TC=+3400+-300 | 54294 | VA12-1/4-1001-J |
| A4R56 | 0757-0447 | 6 | 1 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R57 | 0698-3268 | 7 | 1 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A4R58 | 0698-3572 | 6 | 2 | RESISTOR 60.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6042-F |
| A4R59 | 0698-3572 | 6 | 1 | RESISTOR 60.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6042-F |
| A4R60 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R62 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R64 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R65 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R70 | 0683-2435 | 7 | 1 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A4R71 | 0683-4725 | 2 | 4 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R75 | 0683-5105 | 4 | 1 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A4R80 | 1810-0075 | 9 | 1 | NETWORK-RES 8-SIP750.0 OHM X 7 | 28480 | 1810-0075 |
| A4R101 | 0683-1015 | 7 | 5 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R102 | 0757-0280 | 3 | 3 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R103 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R104 | 0683-3035 | 5 | 1 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A4R105 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R106 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R107 | 0683-1025 | 9 | 2 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R108 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R109 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R110 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R111 | 0683-4715 | 0 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A4R112 | 0683-4715 | 0 | 1 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A4R113 | 0683-4705 | 8 | 3 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R114 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R115 | 0683-2705 | 4 | 1 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R116 | 0683-2705 | 4 | 1 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R117 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R118 | 0683-1025 | 9 | 2 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R120 | 0698-4352 | 7 | 1 | RESISTOR 88.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-88R7-F |
| A4R121 | 0698-4453 | 4 | 1 | RESISTOR 462 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-462R-F |
| A4R122 | 0698-4352 | 7 | 1 | RESISTOR 88.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-88R7-F |
| A4R123 | 0698-2363 | 1 | 2 | RESISTOR 75 1% .125W F TC=0+-50 | 19761 | MC4C1/8-T2-75R0-B |
| A4R124 | 0698-2363 | 1 | 1 | RESISTOR 75 1% .125W F TC=0+-50 | 19761 | MC4C1/8-T2-75R0-B |
| A4R125 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R126 | 0683-4725 | 8 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R127 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R128 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R129 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R130 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R132 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R133 | 0698-4469 | 3 | 1 | RESISTOR 649 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-649R-F |
| A4R134 | 2100-3123 | 0 | 1 | RESISTOR-TRMR 500 10% C SIDE-ADJ 17-TRN | 02111 | 43P581 |
| A4R135 | 0698-3497 | 4 | 1 | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A4R136 | 2100-3122 | 9 | 1 | RESISTOR-TRMR 100 10% C SIDE-ADJ 17-TRN | 02111 | 43P101 |
| A4R137 | 0683-5635 | 5 | 1 | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R138 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R139 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R140 | 0683-5635 | 5 | 1 | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R141 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R142 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R143 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R144 | 0698-3548 | 6 | 1 | RESISTOR 732 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-732R-F |
| A4R150 | 0683-1055 | 5 | 1 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R151 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R152 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4T1 | 08552-6044 | 1 | 1 | TRANSFORMER-6-TURNS | 28480 | 08552-6044 |
| A4U1 | 1826-2655 | 4 | 1 | IC OSC TTL LS DUAL | 01295 | SN74LS625N |
| A4U2 | 1826-0803 | 2 | 1 | IC GATE ECL OR NOR TPL | 04713 | MC10105P |
| A4U3 | 1826-0340 | 4 | 1 | IC OP AMP LOW BIAS-H-TMPD TO-99 PKG | 28480 | 1826-0340 |
| A4U4 | 1826-0421 | 2 | 1 | IC CONV RMS/DC 14-DIP-C PKG | 24355 | AD536AJ |
| A4U4 | 1200-0638 | 7 | 1 | SECRET-IC 14-COBT DIP DIP 5LDR | 28480 | 1200-0638 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------|----------|-----------------|
| A4U5 | 1826-0111 | 7 | 3 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A4U6 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A4U101 | 1826-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A4U103 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A4U104 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING READ | 28486 | 9170-0894 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A4 | 03506-66508 | 0 | 1 | BROADBAND POWER/OVERLOAD/CALIBRATION (3506C) | 20480 | 03506-66508 |
| A4C1 | 0160-3879 | 7 | 15 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C2 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 20480 | 0160-0127 |
| A4C3 | 0160-0576 | 5 | 18 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C4 | 0180-0228 | 6 | 4 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C5 | 0160-0158 | 2 | 1 | CAPACITOR-FXD 5600PF +-10% 200VDC POLYE | 20480 | 0160-0158 |
| A4C6 | 0160-0576 | 5 | 8 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C7 | 0160-0363 | 8 | 1 | CAPACITOR-FXD 620PF +-5% 300VDC MICA | 20480 | 0160-0363 |
| A4C8 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C9 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C10 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C11 | 0180-0100 | 3 | 1 | CAPACITOR-FXD 4.7UF+-10% 35VDC TA | 56289 | 150D475X9035B2 |
| A4C12 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C13 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C14 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C15 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C16 | 0140-0193 | 0 | 1 | CAPACITOR-FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300WV1CR |
| A4C17 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C18 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C19 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C21 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C22 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C23 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C24 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 20480 | 0160-2204 |
| A4C25 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C26 | 0160-0128 | 3 | 4 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 20480 | 0160-0128 |
| A4C27 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A4C28 | 0180-1746 | 5 | 5 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A4C29 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A4C30 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C31 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C32 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C33 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C35 | 0180-1704 | 5 | 1 | CAPACITOR-FXD 47UF+-10% 6VDC TA | 56289 | 150D476X9006B2 |
| A4C40 | 0160-0127 | 2 | 8 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 20480 | 0160-0127 |
| A4C41 | 0180-0486 | 8 | 1 | CAPACITOR-FXD 100PF+-10% 20VDC TA | 20480 | 0180-0486 |
| A4C42 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C44 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C101 | 0160-0576 | 5 | 3 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C102 | 0160-0128 | 3 | 5 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 20480 | 0160-0128 |
| A4C103 | 0160-0128 | 3 | 3 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 20480 | 0160-0128 |
| A4C104 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C105 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C107 | 0160-0128 | 3 | 7 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 20480 | 0160-0128 |
| A4C108 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C109 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C110* | 0140-0190 | 7 | 1 | CAPACITOR-FXD 39PF +-5% 300VDC MICA | 72136 | DM15E390J0300WV1CR |
| A4C110* | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 20480 | 0160-0196 |
| A4C110* | 0160-2198 | 1 | 1 | CAPACITOR-FXD 20PF +-5% 300VDC MICA | 20480 | 0160-2198 |
| A4C110* | 0160-2199 | 2 | 1 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 20480 | 0160-2199 |
| A4C110* | 0160-2308 | 5 | 1 | CAPACITOR-FXD 36PF +-5% 300VDC MICA | 20480 | 0160-2308 |
| A4C111 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C112 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C113 | 0121-0036 | 0 | 1 | CAPACITOR-V TRMR-CER 5.5 16PF 350V | 52763 | 304324 5.5/16PF NP0 |
| A4C114 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 20480 | 0160-3847 |
| A4C115 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C116 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C117 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C118 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C119 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A4C120 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C121 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C124 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 20480 | 0160-3879 |
| A4C125 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 20480 | 0160-0576 |
| A4C126 | 0160-4382 | 9 | 1 | CAPACITOR-FXD 3.3PF +- .25PT 200VDC CER | 20480 | 0160-4382 |
| A4C127 | 0160-3874 | 2 | 1 | CAPACITOR-FXD 10PF +- .5PF 200VDC CER | 20480 | 0160-3874 |
| A4C128 | 0160-2940 | 1 | 1 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 20480 | 0160-2940 |
| A4CR1 | 1901-0535 | 9 | 5 | DIODE-SM SIG SCHOTTKY | 20480 | 1901-0535 |
| A4CR2 | 1901-0535 | 9 | 9 | DIODE-SM SIG SCHOTTKY | 20480 | 1901-0535 |
| A4CR3 | 1901-0535 | 9 | 9 | DIODE-SM SIG SCHOTTKY | 20480 | 1901-0535 |
| A4CR4 | 1901-0050 | 3 | 6 | DIODE-SWITCHING 80V 200MA 2NS 60-35 | 20480 | 1901-0050 |
| A4CR5 | 1901-0050 | 3 | 3 | DIODE-SWITCHING 80V 200MA 2NS 60-35 | 20480 | 1901-0050 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A4CR8 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR9 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR10 | 1901-0539 | 3 | 4 | DIODE 5M SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR11 | 1901-0539 | 3 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR12 | 1901-0539 | 3 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR13 | 1901-0539 | 3 | | DIODE 5M SIG SCHOTTKY | 28480 | 1901-0539 |
| A4CR14 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4CR15 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR16 | 1901-0535 | 9 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A4CR104 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A4DR105 | 1902-0606 | 3 | 1 | DIODE-ZNR 6.2V 2% DO-7 PD=.4W TC=+.002% | 04713 | 1N825 |
| A4DS1 | 1990-0487 | 7 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BUR=5V | 28480 | 5082-4584 |
| A4DS2 | 1990-0486 | 6 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BUR=5V | 28480 | 5082-4684 |
| A4J1 | 1250-1637 | 3 | 1 | CONNECTOR-RF SM-SNP M SGL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A4L1 | 2100-0539 | 3 | 4 | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L2 | 2100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L3 | 2100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A4L4 | 2100-3548 | 0 | 2 | INDUCTOR RF-CO-MLD 470NH 5% .166PX.385LG | 28480 | 9100-3548 |
| A4L5 | 2100-3548 | 0 | | INDUCTOR RF-CO-MLD 470NH 5% .166PX.385LG | 28480 | 9100-3548 |
| A4L105 | 9100-0539 | 3 | | INDUCTOR (MISC ITEM) | 28480 | 9160-0539 |
| A4L106 | 9140-0411 | 4 | 1 | COIL-VAR 200NH-300NH PC-MTG | 28480 | 9140-0411 |
| A4Q1 | 1853-0010 | 2 | 1 | TRANSISTOR PNP SI TO-18 PD=360MW | 28480 | 1853-0010 |
| A4Q2 | 1853-0354 | 7 | 2 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A4Q3 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A4Q4 | 1854-0485 | 7 | 2 | TRANSISTOR NPN SI TO-184 PD=175MW | 28480 | 1854-0485 |
| A4Q5 | 1854-0485 | 7 | | TRANSISTOR NPN SI TO-184 PD=175MW | 28480 | 1854-0485 |
| A4Q6 | 1854-0071 | 7 | 5 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q7 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q8 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q101 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4Q102 | 1854-0795 | 2 | 4 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A4Q103 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A4Q104 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A4Q105 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A4Q106 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A4R2 | 0683-5635 | 5 | 4 | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R3 | 0683-5635 | 5 | | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R4 | 0683-5125 | 8 | 1 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A4R5 | 0683-3325 | 6 | 3 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A4R6 | 0683-7525 | 6 | 1 | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CB7525 |
| A4R7 | 0683-2025 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A4R8 | 0683-4305 | 4 | 2 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A4R9 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A4R10 | 0683-5105 | 4 | 4 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A4R11 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A4R12 | 0683-2705 | 4 | 4 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R13 | 0683-3015 | 1 | 1 | RESISTOR 300 5% .25W FC TC=-400/+600 | 01121 | CB3015 |
| A4R14 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R15 | 0683-2435 | 7 | 3 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A4R16 | 0683-2435 | 7 | | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A4R17 | 0757-0410 | 1 | 1 | RESISTOR 301 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-301R-F |
| A4R18 | 0683-2035 | 3 | 1 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A4R19 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A4R20 | 0683-2725 | 8 | 1 | RESISTOR 2.7K 5% .25W FC TC=-400/+700 | 01121 | CB2725 |
| A4R21 | 0757-0402 | 1 | 1 | RESISTOR 110 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-111-F |
| A4R22 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A4R23 | 0683-1035 | 1 | 14 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R24 | 2100-0552 | 3 | 1 | RESISTOR-TRMR 50 10% C SIDE-ADJ 1-TRN | 28480 | 2100-0552 |
| A4R25 | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-453R-F |
| A4R26 | 0698-3497 | 4 | 2 | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-604R-F |
| A4R28 | 0757-0440 | 6 | 4 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-2002-F |
| A4R29 | 2100-3054 | 6 | 1 | RESISTOR-TRMR 50K 10% C SIDE-ADJ 17-TRN | 02111 | 43P503 |
| A4R30 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A4R31 | 0757-0421 | 4 | 1 | RESISTOR 825 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-825R-F |
| A4R33 | 0698-4494 | 3 | 1 | RESISTOR 35.7K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-3572-F |
| A4R34 | 0698-4476 | 1 | | RESISTOR 10.2K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1022-F |
| A4R35 | 0698-4468 | 1 | 1 | RESISTOR 1.13K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1131-F |
| A4R36 | 0757-0800 | 3 | 4 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1001-F |
| A4R37* | 0698-4475 | 0 | 1 | RESISTOR 9.74K 1% .125W F TC=0+-100 | 03658 | PME55-1/8-T0-9741-F |
| A4R37* | 0698-4476 | 1 | 2 | RESISTOR 10.2K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1022-F |
| A4R37* | 0757-0442 | 9 | 1 | RESISTOR 19K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1002-F |
| A4R38 | 0757-0440 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-2002-F |
| A4R39 | 0757-0467 | 0 | 2 | RESISTOR 121K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1213-F |
| A4R40 | 0757-0467 | 8 | | RESISTOR 121K 1% .125W F TC=0+-100 | 24546 | CA-1/8-T0-1213-F |
| A4R41 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R42 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|-------------------|
| A4R43 | 0757-0459 | 8 | 1 | RESISTOR 56.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5622-F |
| A4R44 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R45 | 0757-0460 | 1 | 1 | RESISTOR 61.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6192-F |
| A4R46 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R47 | 0683-1055 | 5 | 3 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R48 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R49 | 0683-3325 | 6 | | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A4R50 | 0683-3325 | 6 | | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A4R52 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A4R53 | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |
| A4R54 | 0811-1780 | 6 | 1 | RESISTOR 1K 5% .25W PWM TC=+3400+-300 | 54294 | VA12-1/4-1001-J |
| A4R56 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A4R57 | 0698-3268 | 7 | 1 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A4R58 | 0698-3572 | 6 | 2 | RESISTOR 60.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6042-F |
| A4R59 | 0698-3572 | 6 | | RESISTOR 60.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6042-F |
| A4R60 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R62 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R64 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R65 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R70 | 0683-2435 | 7 | | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A4R71 | 0683-4725 | 2 | 4 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R75 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A4R80 | 1010-0075 | 9 | 1 | NETWORK-RES 8-STP750.0 OHM X 7 | 20480 | 1010-0075 |
| A4R101 | 0683-1015 | 7 | 5 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R102 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R103 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R104 | 0683-3035 | 5 | 1 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A4R105 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R106 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A4R107 | 0683-1035 | 9 | 7 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R108 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R109 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R110 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R111 | 0683-4715 | 0 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A4R112 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A4R113 | 0683-4705 | 8 | 3 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R114 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R115 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R116 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A4R117 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R118 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R120 | 0698-4359 | 7 | 2 | RESISTOR 98.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-987-F |
| A4R121 | 0698-4453 | 4 | 1 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A4R122 | 0698-4359 | 7 | | RESISTOR 98.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-987-F |
| A4R123 | 0698-7363 | 1 | 2 | RESISTOR 75 .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-75R0-B |
| A4R124 | 0698-7363 | 1 | | RESISTOR 75 .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-75R0-B |
| A4R125 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A4R126 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R127 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R128 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A4R129 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R130 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R132 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4R133 | 0698-4460 | 3 | 1 | RESISTOR 649 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-649R-F |
| A4R134 | 2100-3123 | 0 | 1 | RESISTOR-TRMR 500 10% C SIDE-ADJ 17-TRN | 02111 | 43P501 |
| A4R135 | 0698-3497 | 4 | | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A4R136 | 2100-3122 | 9 | 1 | RESISTOR-TRMR 100 10% C SIDE-ADJ 17-TRN | 02111 | 43P101 |
| A4R137 | 0683-5635 | 5 | | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R138 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R139 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R140 | 0683-5635 | 5 | | RESISTOR 56K 5% .25W FC TC=-400/+800 | 01121 | CB5635 |
| A4R141 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R142 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R143 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A4R144 | 0698-3548 | 6 | 1 | RESISTOR 732 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-732R-F |
| A4R150 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A4R151 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A4R152 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A4T1 | 08552-6044 | 1 | 1 | TRANSFORMER-6-TURNS | 28480 | 08552-6044 |
| A4U1 | 1820-2655 | 6 | 1 | IC OSC TTL LS DUAL | 01295 | SN74LS625N |
| A4U2 | 1820-0803 | 2 | 1 | IC GATE ECL OR-NOR TPL | 04713 | MC10105P |
| A4U3 | 1826-0340 | 4 | 1 | IC OP AMP LOW BIAS-H-IMPD TO-99 PKG | 28480 | 1826-0340 |
| A4U4 | 1826-0421 | 2 | 1 | IC CONV RMS/DC 14-DIP-C PKG | 24355 | AD536AJ |
| A4U4 | 1200-0638 | 7 | 1 | SOCKET IC 14-CONT DIP DIP-GLDR | 28480 | 1200-0638 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|---------------------------------|----------|-----------------|
| A4U5 | 1826-0111 | 7 | 3 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A4U6 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A4U101 | 1820-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A4U103 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A4U104 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A5 | 03586-66505 | 7 | 1 | INPUT MIXER (3586A/B) | 28480 | 03586-66505 |
| A5C1 | 0160-4385 | 2 | 2 | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A5C2 | 0160-4385 | 2 | 2 | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A5C5 | 0160-3847 | 9 | 13 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C6 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C7 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C20 | 0160-4283 | 9 | 1 | CAPACITOR-FXD 100PF +-5% 200VDC CER | 51642 | 150-100 NP0-101J |
| A5C21 | 0160-2249 | 3 | 2 | CAPACITOR-FXD 4.7PF +--.25PF 500VDC CER | 28480 | 0160-2249 |
| A5C22 | 0160-2249 | 3 | 3 | CAPACITOR-FXD 4.7PF +--.25PF 500VDC CER | 28480 | 0160-2249 |
| A5C23 | 0121-0162 | 3 | 1 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 16-1326-25004-910 |
| A5C24 | 0140-2263 | 1 | 1 | CAPACITOR-FXD 18PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2263 |
| A5C25 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C28 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C29 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C30 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A5C40 | 0180-0228 | 6 | 5 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C41 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C42 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C43 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C44 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C45 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C52 | 0160-2255 | 1 | 1 | CAPACITOR-FXD 8.2PF +--.25PF 500VDC CER | 28480 | 0160-2255 |
| A5C53 | 0121-0451 | 3 | 6 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C54 | 0160-2241 | 5 | 1 | CAPACITOR-FXD 2.2PF +--.25PF 500VDC CER | 28480 | 0160-2241 |
| A5C55 | 0160-2201 | 7 | 2 | CAPACITOR-FXD 51PF +-5% 300VDC MICA | 28480 | 0160-2201 |
| A5C56 | 0121-0451 | 3 | 3 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C57 | 0160-2257 | 3 | 1 | CAPACITOR-FXD 10PF +-5% 500VDC CER 0+-60 | 28480 | 0160-2257 |
| A5C58 | 0160-2201 | 7 | 7 | CAPACITOR-FXD 51PF +-5% 300VDC MICA | 28480 | 0160-2201 |
| A5C59 | 0121-0451 | 3 | 3 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C60 | 0160-2253 | 9 | 1 | CAPACITOR-FXD 6.8PF +--.25PF 500VDC CER | 28480 | 0160-2253 |
| A5C61 | 0121-0451 | 3 | 3 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C62 | 0140-0191 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E560J0300VDCR |
| A5C63 | 0121-0451 | 3 | 3 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C64 | 0160-2266 | 4 | 1 | CAPACITOR-FXD 24PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2266 |
| A5C65 | 0121-0451 | 3 | 7 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C67 | 0160-3879 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A5C68 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C69 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C70 | 0180-1701 | 2 | 2 | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56289 | 150D685X0006A2 |
| A5C71 | 0180-1701 | 2 | 2 | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56289 | 150D685X0006A2 |
| A5C72 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C73 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C74 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C75 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C76 | 0180-2062 | 0 | 1 | CAPACITOR-FXD 120UF+-20% 10VDC TA | 56289 | 150D127X0010R2 |
| A5CR1 | 1906-0211 | 8 | 1 | DIODE-ARRAY VF DIFF=20MV | 28480 | 1906-0211 |
| A5J1 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A5L1 | 9100-2249 | 6 | 1 | INDUCTOR RF-CH-MLD 150NH 10% .105DX.26LG | 28480 | 9100-2249 |
| A5L21 | 9100-1379 | 1 | 1 | INDUCTOR-VAR | 28480 | 9100-1379 |
| A5L22 | 9100-3562 | 8 | 3 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L23 | 9100-3562 | 8 | 8 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L24 | 9100-3562 | 8 | 8 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L25 | 9140-0257 | 6 | 1 | COIL-VAR 297NH-363NH Q=140 PC-MTG | 28480 | 9140-0257 |
| A5L40 | 9140-0394 | 2 | 3 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L41 | 9140-0394 | 2 | 2 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L42 | 9140-0394 | 2 | 2 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L50 | 9140-0384 | 0 | 1 | INDUCTOR 618NH 2% .344DX.625LG | 28480 | 9140-0384 |
| A5L51 | 9140-0386 | 2 | 2 | INDUCTOR 702NH 2% .344DX.625LG | 28480 | 9140-0386 |
| A5L52 | 9140-0386 | 2 | 2 | INDUCTOR 702NH 2% .344DX.625LG | 28480 | 9140-0386 |
| A5L53 | 9140-0385 | 1 | 1 | INDUCTOR 831NH 2% .344DX.625LG | 28480 | 9140-0385 |
| A5Q21 | 1854-0345 | 8 | 2 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A5Q22 | 1854-0345 | 8 | 2 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A5Q70 | 1854-0795 | 8 | 2 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A5Q71 | 1854-0795 | 2 | 2 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A5Q72 | 1853-0354 | 7 | 1 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A5R1 | 0757-0282 | 5 | 3 | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A5R2 | 0757-0277 | 8 | 3 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A5R3 | 0757-0277 | 8 | 3 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A5R4 | 2100-3383 | 4 | 1 | RESISTOR-TRMR 50 10% C TOP-ADJ 1-TRN | 28480 | 2100-3383 |
| A5R5 | 0757-0401 | 0 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0 101-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|--|----------|---------------------|
| A5R6 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A5R7 | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A5R8 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A5R9 | 0757-0282 | 5 | | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A5R10 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A5R11 | 0757-0284 | 7 | | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A5R12 | 0757-0282 | 5 | | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A5R20 | 0698-4354 | 4 | 2 | RESISTOR 11.8 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-11R8-F |
| A5R21 | 0698-4354 | 4 | | RESISTOR 11.8 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-11R8-F |
| A5R22 | 0698-4386 | 2 | 4 | RESISTOR 59 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-59R0-F |
| A5R23* | 0698-3445 | 2 | 1 | RESISTOR 346 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-348R-F |
| A5R23* | 0698-3447 | 4 | 1 | RESISTOR 422 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-422R-F |
| A5R23* | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453R-F |
| A5R23* | 0698-4123 | 5 | 1 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A5R23* | 0698-4450 | 1 | 1 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A5R23* | 0698-4452 | 3 | 1 | RESISTOR 374 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-374R-F |
| A5R23* | 0698-4453 | 4 | 1 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A5R23* | 0698-4454 | 5 | 1 | RESISTOR 523 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-523R-F |
| A5R24 | 2100-1984 | 7 | 1 | RESISTOR-TRMR 100 10% C TOP-ADJ 1-TRN | 73138 | R2PR100 |
| A5R25 | 0683-6225 | 1 | 1 | RESISTOR 6.2K 5% .25W FC TC=-400/+700 | 01121 | CB6225 |
| A5R26 | 0683-2725 | 8 | 1 | RESISTOR 2.7K 5% .25W FC TC=-400/+700 | 01121 | CB2725 |
| A5R27 | 0683-7505 | 2 | 2 | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| A5R28 | 0683-1815 | 5 | 1 | RESISTOR 180 5% .25W FC TC=-400/+600 | 01121 | CB1815 |
| A5R29 | 0683-7505 | 2 | | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| A5R30 | 0757-0398 | 4 | 1 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A5R31 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A5R32 | 0698-4448 | 7 | 2 | RESISTOR 294 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-294R-F |
| A5R33 | 0757-0294 | 9 | 1 | RESISTOR 17.8 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-17R8-F |
| A5R34 | 0698-4448 | 7 | | RESISTOR 294 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-294R-F |
| A5R50 | 2100-3349 | 2 | 1 | RESISTOR-TRMR 100 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3349 |
| A5R51 | 0698-3279 | 0 | 2 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A5R52 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A5R53 | 0698-4442 | 1 | 1 | RESISTOR 4.42K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4421-F |
| A5R54 | 0698-4464 | 7 | 1 | RESISTOR 887 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-887R-F |
| A5R70 | 0683-2405 | 1 | 1 | RESISTOR 24 5% .25W FC TC=-400/+500 | 01121 | CB2405 |
| A5R71 | 0683-5115 | 6 | 1 | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| A5R72 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A5R73 | 0757-0411 | 2 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A5R74 | 0698-0063 | 4 | 2 | RESISTOR 5.23K 1% .125W F TC=0+-100 | 91637 | CMF-1/8-T1-5231-F |
| A5R75 | 0757-0427 | 0 | 1 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A5R76 | 0698-0063 | 4 | | RESISTOR 5.23K 1% .125W F TC=0+-100 | 91637 | CMF-1/8-T1-5231-F |
| A5R77 | 0757-0415 | 6 | 1 | RESISTOR 475 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-475R-F |
| A5R78 | 0757-0381 | 5 | 2 | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A5R79 | 0683-5105 | 4 | 2 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A5R80 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| A5R81 | 0757-0301 | 5 | | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| A5R82 | 0498-4393 | 1 | 1 | RESISTOR 73.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-73R2-F |
| A5T1 | 08552-6044 | 1 | 3 | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A5T3 | 9100-4038 | 5 | 1 | TRANSFORMER BEAD CORE; WITH CT PRI & SEC | 28480 | 9100-4038 |
| A5T20 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A5T21 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A5U1 | 1658-0015 | 7 | 1 | IC MISC | 28480 | 1658-0015 |
| A5Y1** | 0410-0753 | 1 | 2 | CRYSTAL-QUARTZ MATCHED PAIR; 49.995 MHZ | 28480 | 0410-0753 |
| A5Y2 | 0410-0753 | 1 | | CRYSTAL-QUARTZ MATCHED PAIR; 50.005MHZ | 28480 | 0410-0753 |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD **HP- PART NUMBER 0410-0753 CONSISTS OF A MATCHED SET OF 2 CRYSTALS; 1 EACH 49.995MHZ AND 1 EACH 50.005MHZ. | 28480 | 9170-0894 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A5 | 03586-66509 | 1 | 1 | INPUT MIXER (3586C) | 28480 | 03586-66509 |
| A5C1 | 0160-4385 | 2 | 2 | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A5C2 | 0160-4385 | 2 | | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A5C5 | 0160-3847 | 9 | 13 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C6 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C7 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C20 | 0160-4283 | 9 | 1 | CAPACITOR-FXD 100PF +-5% 200VDC CER | 51642 | 150-100-NP0-101J |
| A5C21 | 0160-2249 | 3 | 2 | CAPACITOR-FXD 4.7PF +-1.25PF 500VDC CER | 28480 | 0160-2249 |
| A5C22 | 0160-2249 | 3 | | CAPACITOR-FXD 4.7PF +-1.25PF 500VDC CER | 28480 | 0160-2249 |
| A5C23 | 0121-0162 | 3 | 1 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A5C24 | 0160-2263 | 1 | 1 | CAPACITOR-FXD 18PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2263 |
| A5C25 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C28 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C29 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C30 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A5C40 | 0180-0228 | 6 | 5 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C41 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C42 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C43 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C44 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C45 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C52 | 0160-2255 | 1 | 1 | CAPACITOR-FXD 8.2PF +-1.25PF 500VDC CER | 28480 | 0160-2255 |
| A5C53 | 0121-0451 | 3 | 6 | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C54 | 0160-2241 | 5 | 1 | CAPACITOR-FXD 2.2PF +-1.25PF 500VDC CER | 28480 | 0160-2241 |
| A5C55 | 0160-2291 | 7 | 2 | CAPACITOR-FXD 51PF +-5% 300VDC MICA | 28480 | 0160-2291 |
| A5C56 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C57 | 0160-2257 | 3 | 1 | CAPACITOR-FXD 10PF +-5% 500VDC CER 0+ 60 | 28480 | 0160-2257 |
| A5C58 | 0160-2201 | 7 | | CAPACITOR-FXD 51PF +-5% 300VDC MICA | 28480 | 0160-2201 |
| A5C59 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C60 | 0160-2253 | 9 | 1 | CAPACITOR-FXD 6.8PF +-1.25PF 500VDC CER | 28480 | 0160-2253 |
| A5C61 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C62 | 0140-0191 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E56J03000V1CR |
| A5C63 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C64 | 0160-2266 | 4 | 1 | CAPACITOR-FXD 24PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2266 |
| A5C65 | 0121-0451 | 3 | | CAPACITOR-V TRMR-AIR 1.7-11PF 175V | 74970 | 187-0106-028 |
| A5C67 | 0160-3879 | 7 | 1 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A5C68 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C69 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C70 | 0180-1701 | 2 | 2 | CAPACITOR-FXD 5.1UF+-20% 6VDC TA | 56289 | 150D685X0006A2 |
| A5C71 | 0180-1701 | 2 | | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56289 | 150D685X0006A2 |
| A5C72 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C73 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C74 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A5C75 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A5C76 | 0180-0262 | 0 | 1 | CAPACITOR-FXD 120UF+-20% 10VDC TA | 56289 | 150D127X0010R2 |
| A5CR1 | 1906-0211 | 8 | 1 | DIODE-ARRAY VF DIF=20MV | 28480 | 1906-0211 |
| A5J1 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A5L1 | 9100-2249 | 6 | 1 | INDUCTOR RF-CH-MLD 150NH 10% .165DX.26LG | 28480 | 9100-2249 |
| A5L21 | 9100-1379 | 1 | 1 | INDUCTOR-VAR | 28480 | 9100-1379 |
| A5L22 | 9100-3562 | 8 | 3 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L23 | 9100-3562 | 8 | | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L24 | 9100-3562 | 8 | | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A5L25 | 9140-0257 | 6 | 1 | COIL-VAR 297NH-363NH Q=140 PC-MTG | 28480 | 9140-0257 |
| A5L40 | 9140-0394 | 2 | 3 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L41 | 9140-0394 | 2 | | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L42 | 9140-0394 | 2 | | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A5L50 | 9140-0384 | 0 | 1 | INDUCTOR 610NH 2% .344DX.625LG | 28480 | 9140-0384 |
| A5L51 | 9140-0386 | 2 | 2 | INDUCTOR 702NH 2% .344DX.625LG | 28480 | 9140-0386 |
| A5L52 | 9140-0386 | 2 | | INDUCTOR 702NH 2% .344DX.625LG | 28480 | 9140-0386 |
| A5L53 | 9140-0385 | 1 | 1 | INDUCTOR 831NH 2% .344DX.625LG | 28480 | 9140-0385 |
| A5Q21 | 1854-0345 | 8 | 2 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A5Q22 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A5Q70 | 1854-0795 | 2 | 2 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A5Q71 | 1854-0795 | 2 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPSH10 |
| A5Q72 | 1853-0354 | 7 | 1 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A5R1 | 0757-0282 | 5 | 3 | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A5R2 | 0757-0277 | 8 | 3 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A5R3 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A5R4 | 2100-3383 | 4 | 1 | RESISTOR TRMR 50 10% C TOP-ADJ 1-TRN | 28480 | 2100-3383 |
| A5R5 | 0757-0401 | 0 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| ASR6 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| ASR7 | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| ASR8 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| ASR9 | 0757-0282 | 5 | | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| ASR10 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| ASR11 | 0757-0284 | 7 | | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| ASR12 | 0757-0282 | 5 | | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| ASR20 | 0698-4354 | 4 | 2 | RESISTOR 11.8 1% .125W F TC=0+-100 | 03888 | PM55-1/8-T0-11R8-F |
| ASR21 | 0698-4354 | 4 | | RESISTOR 11.8 1% .125W F TC=0+-100 | 03888 | PM55-1/8-T0-11R8-F |
| ASR22 | 0698-4386 | 2 | 1 | RESISTOR 59 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-59R0-F |
| ASR23* | 0698-3445 | 2 | 1 | RESISTOR 348 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-348R-F |
| ASR23* | 0698-3447 | 4 | 1 | RESISTOR 422 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-422R-F |
| ASR23* | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453R-F |
| ASR23* | 0698-4123 | 5 | 1 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| ASR23* | 0698-4452 | 3 | 1 | RESISTOR 374 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-374R-F |
| ASR23* | 0698-4453 | 4 | 1 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| ASR23* | 0698-4454 | 5 | 1 | RESISTOR 523 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-523R-F |
| ASR24 | 2100-1984 | 7 | 1 | RESISTOR-TRMR 100 10% C TOP-ADJ 1-TRN | 73138 | B2PR100 |
| ASR25 | 0683-6225 | 1 | 1 | RESISTOR 6.2K 5% .25W FC TC=-400/+700 | 01121 | CB6225 |
| ASR26 | 0683-2725 | 8 | 1 | RESISTOR 2.7K 5% .25W FC TC=-400/+700 | 01121 | CB2725 |
| ASR27 | 0683-7505 | 2 | 2 | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| ASR28 | 0683-1815 | 5 | 1 | RESISTOR 180 5% .25W FC TC=-400/+600 | 01121 | CB1815 |
| ASR29 | 0683-7505 | 2 | | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| ASR30 | 0757-0395 | 1 | 1 | RESISTOR 56.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-56R2-F |
| ASR31 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| ASR50 | 2100-3349 | 2 | 1 | RESISTOR-TRMR 100 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3349 |
| ASR51 | 0698-3279 | 0 | 2 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| ASR52 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| ASR53 | 0698-4442 | 1 | 1 | RESISTOR 4.42K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4421-F |
| ASR54 | 0698-4464 | 7 | 1 | RESISTOR 887 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-887R-F |
| ASR70 | 0683-2405 | 1 | 1 | RESISTOR 24 5% .25W FC TC=-400/+500 | 01121 | CB2405 |
| ASR71 | 0683-5115 | 6 | 1 | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| ASR72 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| ASR73 | 0757-0411 | 2 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| ASR74 | 0698-0063 | 4 | 2 | RESISTOR 5.23K 1% .125W F TC=0+-100 | 91637 | CMF-1/8-T1-5231-F |
| ASR75 | 0757-0427 | 0 | 1 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| ASR76 | 0698-0063 | 4 | | RESISTOR 5.23K 1% .125W F TC=0+-100 | 91637 | CMF-1/8-T1-5231-F |
| ASR77 | 0757-0415 | 6 | 1 | RESISTOR 475 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-475R-F |
| ASR78 | 0757-0381 | 5 | 2 | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| ASR79 | 0683-5105 | 4 | 2 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| ASR80 | 0683-5105 | 4 | | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CB5105 |
| ASR81 | 0757-0381 | 5 | | RESISTOR 15 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-15R0-F |
| ASR82 | 0698-4393 | 1 | 1 | RESISTOR 73.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-73R2-F |
| AST1 | 08552-6044 | 1 | 3 | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| AST3 | 9100-4038 | 5 | 1 | TRANSFORMER BEAD CORE; WITH CT PRI & SEC | 28480 | 9100-4038 |
| AST20 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| AST21 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| ASU1 | 1858-0015 | 7 | 1 | IC MISC | 28480 | 1858-0015 |
| ASY1** | 0410-0753 | 1 | 2 | CRYSTAL-QUARTZ MATCHED PAIR; 49.995 MHZ | 28480 | 0410-0753 |
| ASY2 | 0410-0753 | 1 | | CRYSTAL-QUARTZ MATCHED PAIR; 50.005MHZ | 28480 | 0410-0753 |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD **HP- PART NUMBER 0410-0753 CONSISTS OF A MATCHED SET OF 2 CRYSTALS; 1 EACH 49.995MHZ AND 1 EACH 50.005MHZ. | 28480 | 9170-0894 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A10 | 03586-66510 | 4 | 1 | SECOND MIXER (3586A/B/C) | 28480 | 03586-66510 |
| A10C1 | 0160-2205 | 1 | 2 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A10C2 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A10C3 | 0160-2205 | 1 | 16 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A10C4 | 0160-3847 | 9 | 16 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C5 | 0160-3847 | 9 | 16 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C6 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C7 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C15 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C16 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C17 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C18 | 0160-3847 | 9 | 3 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C20 | 0160-2249 | 3 | 2 | CAPACITOR-FXD 4.7PF +-25PF 500VDC CER | 28480 | 0160-2249 |
| A10C21 | 0160-2249 | 3 | 1 | CAPACITOR-FXD 4.7PF +-25PF 500VDC CER | 28480 | 0160-2249 |
| A10C22 | 0121-0162 | 3 | 1 | CAPACITOR-V TRMR A1R 1.2-3.5PF 350V | 38590 | 10-1326-25004-710 |
| A10C23 | 0160-2263 | 1 | 1 | CAPACITOR-FXD 18PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2263 |
| A10C24 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C25 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C26 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C27 | 0160-2306 | 3 | 2 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A10C40 | 0160-2230 | 2 | 1 | CAPACITOR-FXD 3300PF +-5% 300VDC MICA | 28480 | 0160-2230 |
| A10C41 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A10C42 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C43 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C50 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A10C51 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C52 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A10C53 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C54 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A10C55 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A10C101 | 0140-0205 | 5 | 1 | CAPACITOR-FXD 62PF +-5% 300VDC MICA | 72136 | DM15E620J03000VV1CR |
| A10C102 | 0160-4317 | 0 | 1 | CAPACITOR-FXD 1200PF +-1% 100VDC MICA | 28480 | 0160-4317 |
| A10C103 | 0140-0195 | 2 | 1 | CAPACITOR-FXD 130PF +-5% 300VDC MICA | 72136 | DM15F131J03000VV1CR |
| A10C104 | 0160-2387 | 0 | 2 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A10C106 | 0160-2373 | 4 | 1 | CAPACITOR-FXD 4700PF +-2% 300VDC MICA | 28480 | 0160-2373 |
| A10C107 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A10C108 | 0140-0223 | 7 | 1 | CAPACITOR-FXD 260PF +-1% 300VDC MICA | 72136 | DM15F261F03000VV1C |
| A10C109 | 0160-3084 | 6 | 1 | CAPACITOR-FXD 60PF +-2% 500VDC MICA | 28480 | 0160-3084 |
| A10C111 | 0160-2203 | 9 | 1 | CAPACITOR-FXD 91PF +-5% 300VDC MICA 0+70 | 28480 | 0160-2203 |
| A10C112 | 0160-2387 | 0 | 1 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A10C113 | 0160-3535 | 2 | 1 | CAPACITOR-FXD 560PF +-5% 300VDC MICA | 28480 | 0160-3535 |
| A10C114 | 0160-0980 | 5 | 1 | CAPACITOR-FXD 6200PF +-2% 300VDC MICA | 28480 | 0160-0980 |
| A10C115 | 0160-2307 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A10C116 | 0160-3156 | 3 | 1 | CAPACITOR-FXD 750PF +-1% 300VDC MICA | 28480 | 0160-3156 |
| A10C117 | 0140-0217 | 9 | 1 | CAPACITOR-FXD 140PF +-2% 300VDC MICA | 72136 | DM15F141G03000VV1CR |
| A10C119 | 0140-0209 | 9 | 1 | CAPACITOR-FXD 5PF +-10% 500VDC MICA | 72136 | DM15C050K05000VV1CR |
| A10C120 | 0140-0228 | 2 | 1 | CAPACITOR-FXD 360PF +-1% 300VDC MICA | 72136 | DM15F361F03000VV1C |
| A10CR1 | 1906-0210 | 7 | 1 | DIODE-ARRAY VF DIFF=20MV | 28480 | 5082-2830 |
| A10J1 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A10L1 | 9100-3818 | 7 | 2 | INDUCTOR RF-CH-MLD 47NH 20% .166DX.385LG | 28480 | 9100-3818 |
| A10L2 | 9100-3818 | 7 | 1 | INDUCTOR RF-CH-MLD 47NH 20% .166DX.385LG | 28480 | 9100-3818 |
| A10L20 | 9100-1379 | 1 | 1 | INDUCTOR-VAR | 28480 | 9100-1379 |
| A10L21 | 9100-3562 | 8 | 3 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A10L22 | 9100-3562 | 8 | 3 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A10L23 | 9100-3562 | 8 | 3 | INDUCTOR RF-CH-MLD 4.7UH 5% .166DX.385LG | 28480 | 9100-3562 |
| A10L24 | 9140-0257 | 6 | 1 | COIL-VAR 297NH-363NH Q=140 PC-MTC | 28480 | 9140-0257 |
| A10L40 | 9140-0393 | 1 | 1 | INDUCTOR RF-CH-MLD 20UH 5% .166DX.385LG | 28480 | 9140-0393 |
| A10L50 | 9140-0394 | 2 | 3 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A10L51 | 9140-0394 | 2 | 3 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A10L52 | 9140-0394 | 2 | 3 | INDUCTOR RF-CH-MLD 680NH 5% .166DX.385LG | 28480 | 9140-0394 |
| A10L101 | 9140-0376 | 0 | 3 | COIL-VARIABLE 110. MH; +-3% MIN; Q | 28480 | 9140-0376 |
| A10L102 | 9140-0377 | 0 | 1 | COIL-VARIABLE 290. MH; +-3% MIN; Q | 28480 | 9140-0377 |
| A10L103 | 9140-0376 | 1 | 1 | COIL-VARIABLE 110. MH; +-3% MIN; Q | 28480 | 9140-0376 |
| A10L104 | 9140-0376 | 0 | 1 | COIL-VARIABLE 110. MH; +-3% MIN; Q | 28480 | 9140-0376 |
| A10Q19 | 1854-0345 | 8 | 3 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A10Q20 | 1854-0345 | 8 | 3 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A10Q21 | 1854-0345 | 8 | 3 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A10R1 | 0757-0277 | 8 | 4 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A10R2 | 0757-0277 | 8 | 4 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A10R3 | 0757-0402 | 1 | 2 | RESISTOR 110 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-111-F |
| A10R5 | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A10R6 | 0757-0402 | 1 | 1 | RESISTOR 110 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-111-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A10R7 | 0693-1015 | 7 | 2 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A10R8 | 0757-0282 | 5 | 2 | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A10R9 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A10R10 | 0757-0284 | 7 | | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A10R11 | 0757-0282 | 5 | | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A10R12 | 0757-0385 | 9 | 2 | RESISTOR 22.1 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-22R1-F |
| A10R13 | 0757-0385 | 9 | | RESISTOR 22.1 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-22R1-F |
| A10R15 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A10R16 | 0757-0291 | 6 | 1 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A10R17 | 0757-0401 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A10R18 | 0698-4459 | 0 | 1 | RESISTOR 634 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-634R-F |
| A10R19 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A10R20 | 0698-3443 | 0 | 1 | RESISTOR 287 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-287R-F |
| A10R23* | 0698-3445 | 2 | 1 | RESISTOR 348 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-348R-F |
| A10R23* | 0698-3447 | 4 | 1 | RESISTOR 422 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-422R-F |
| A10R23* | 0698-3510 | 2 | 1 | RESISTOR 453 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453R-F |
| A10R23* | 0698-4123 | 5 | 1 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A10R23* | 0698-4450 | 1 | 1 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A10R23* | 0698-4452 | 3 | 1 | RESISTOR 374 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-374R-F |
| A10R23* | 0698-4453 | 4 | 1 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A10R23* | 0698-4454 | 5 | 1 | RESISTOR 523 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-523R-F |
| A10R24 | 2100-0568 | 1 | 1 | RESISTOR-TRMR 100 10% C TOP-ADJ 1-TRN | 28480 | 2100-0568 |
| A10R25 | 0683-1815 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A10R26 | 0683-6225 | 1 | 1 | RESISTOR 6.2K 5% .25W FC TC=-400/+700 | 01121 | CB6225 |
| A10R27 | 0683-2725 | 8 | 1 | RESISTOR 2.7K 5% .25W FC TC=-400/+700 | 01121 | CB2725 |
| A10R28 | 0757-0398 | 4 | 6 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R29 | 0683-1815 | 5 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1815 |
| A10R30 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R31 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R32 | 0698-3488 | 3 | 2 | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-422R-F |
| A10R33 | 0698-4373 | 7 | 1 | RESISTOR 26.7 1% .125W F TC=0+-100 | 03888 | PM55-1/8-T0-26R7-F |
| A10R34 | 0698-3488 | 3 | | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-422R-F |
| A10R40 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R41 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R42 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A10R43 | 2100-3352 | 7 | 1 | RESISTOR-TRMR 1K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3352 |
| A10R44 | 0757-0280 | 3 | 2 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A10R51 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A10R100 | 0698-3160 | 8 | 1 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A10R101 | 0698-3156 | 2 | 1 | RESISTOR 14.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1472-F |
| A10R102 | 0698-3245 | 9 | 1 | RESISTOR 20.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2052-F |
| A10R103 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A10R104 | 0698-3558 | 8 | 1 | RESISTOR 4.02K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4021-F |
| A10R105 | 2100-0567 | 0 | 1 | RESISTOR-TRMR 2K 10% C TOP-ADJ 1-TRN | 28480 | 2100-0567 |
| A10T1 | 08552-6044 | 1 | 3 | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A10T2 | 9100-4038 | 5 | 1 | TRANSFORMER BEAD CORE; WITH CT PRI & SEC | 28480 | 9100-4038 |
| A10T3 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A10T20 | 08552-6044 | 1 | | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A10U1 | 1858-0015 | 7 | 1 | IC MISC | 28480 | 1858-0015 |
| A10U40 | 1826-0715 | 7 | 2 | IC OP AMP LOW-NOISE 8-DIP-P PKG | 18324 | NESS34AN |
| A10U101 | 1826-0715 | 7 | | IC OP AMP LOW-NOISE 8-DIP-P PKG | 18324 | NESS34AN |
| A10Y1** | 0410-0753 | 1 | 2 | CRYSTAL-QUARTZ MATCHED PAIR: 49.995MHZ | 28480 | 0410-0753 |
| A10Y2 | 0410-0753 | 1 | | CRYSTAL-QUARTZ MATCHED PAIR: 50.005MHZ | 28480 | 0410-0753 |
| | | | | **-HP- PART NUMBER 0410-0753 CONSISTS OF A MATCHED SET OF 2 CRYSTALS; 1 EACH 49.995MHZ AND 1 EACH 50.005MHZ. | | |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A11 | 03586-66511 | 5 | 1 | SECOND LOCAL OSCILLATOR (3586A/B/C) | 28480 | 03586-66511 |
| A11C1 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020R2 |
| A11C2 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020R2 |
| A11C3 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X7010R2 |
| A11C4 | 0160-3879 | 7 | 5 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A11C6 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A11C12 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .01UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C13 | 0160-3847 | 9 | 18 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C15 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C16 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C20 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C22 | 0160-2242 | 6 | 1 | CAPACITOR-FXD 2.4PF +- .25PF 500VDC CER | 28480 | 0160-2242 |
| A11C23 | 0160-3847 | 7 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C24 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C25 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A11C26 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C27 | 0140-0193 | 0 | 1 | CAPACITOR-FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300WV1CR |
| A11C28 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A11C29 | 0160-0134 | 1 | 1 | CAPACITOR-FXD 220PF +-5% 300VDC MICA | 28480 | 0160-0134 |
| A11C31 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C32 | 0180-0210 | 6 | 1 | CAPACITOR-FXD 3.3UF+-20% 15VDC TA | 56269 | 150D335X0015A2 |
| A11C33 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C34 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C35 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C44 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C45 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C46 | 0160-4387 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 200VDC CER 10+-30 | 28480 | 0160-4387 |
| A11C48 | 0160-3752 | 5 | 5 | CAPACITOR-FXD 1000PF +-10% 50VDC CER | 28480 | 0160-3752 |
| A11C49 | 0160-3752 | 5 | 5 | CAPACITOR-FXD 1000PF +-10% 50VDC CER | 28480 | 0160-3752 |
| A11C50 | 0160-3877 | 5 | 3 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A11C51 | 0160-3877 | 5 | 3 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A11C52 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A11C53 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A11C54 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C55 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C56 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C57 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C58 | 0160-3752 | 5 | | CAPACITOR-FXD 1000PF +-10% 50VDC CER | 28480 | 0160-3752 |
| A11C61 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C62 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C70 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C80 | 0180-0106 | 9 | 1 | CAPACITOR-FXD 60UF+-20% 6VDC TA | 56289 | 150D606X0006B2 |
| A11C81 | 0140-2611 | 3 | 1 | CAPACITOR-FXD 1UF +-10% 50VDC MET-POLYE | 28480 | 0160-2611 |
| A11C82 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C83 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C85 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A11C86 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A11C91 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11C92 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A11CR20 | 0122-0089 | 5 | 1 | DIODE-VVC 29PF 10% C3/C25-MIN=5 RVR=30V | 04713 | MV109 |
| A11CR24 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A11CR91 | 1990-0486 | 6 | 1 | LED-1 AMP LUM-INT=1MCD IF=20MA-MAX RVR=5V | 28480 | 5082-4684 |
| A11J1 | 1250-1512 | 3 | 2 | CONNECTOR-RF SMB M PC 50 OHM | 28480 | 1250-1512 |
| A11L1 | 9140-0129 | 1 | 2 | INDUCTOR RF-CH-MLD 220UH 5% .166DX.385LG | 28480 | 9140-0129 |
| A11L2 | 9140-0129 | 1 | 2 | INDUCTOR RF-CH-MLD 220UH 5% .166DX.385LG | 28480 | 9140-0129 |
| A11L3 | 9100-3560 | 6 | 1 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.305LG | 28480 | 9100-3560 |
| A11L15 | 9140-0144 | 8 | 2 | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A11L20 | 9100-3547 | 9 | 3 | INDUCTOR RF-CH-MLD 4.3UH 5% .166DX.385LG | 28480 | 9100-3547 |
| A11L21 | 9100-3345 | 5 | 1 | INDUCTOR RF-CH-MLD 2UH 5% .166DX.385LG | 28480 | 9100-3345 |
| A11L22 | 9100-1379 | 1 | 1 | INDUCTOR-VAR | 28480 | 9100-1379 |
| A11L23 | 9100-2485 | 2 | 1 | INDUCTOR RF-CH-MLD 220MH 5% .166DX.385LG | 28480 | 9100-2485 |
| A11L33 | 9100-3547 | 9 | | INDUCTOR RF-CH-MLD 4.3UH 5% .166DX.385LG | 28480 | 9100-3547 |
| A11L44 | 9100-3547 | 9 | | INDUCTOR RF-CH-MLD 4.3UH 5% .166DX.385LG | 28480 | 9100-3547 |
| A11L50 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A11Q10 | 1854-0071 | 7 | 2 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A11Q11 | 1854-0071 | 7 | 2 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A11Q21 | 1853-0405 | 9 | 2 | TRANSISTOR PNP SI PD=300MW FT=850MHZ | 04713 | 2N4207 |
| A11Q22 | 1853-0405 | 9 | 2 | TRANSISTOR PNP SI PD=300MW FT=850MHZ | 04713 | 2N4209 |
| A11R11 | 0683-1525 | 4 | 1 | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CR1525 |
| A11R12 | 0683-2225 | 3 | 1 | RESISTOR 2.2K 5% .25W FC TC=-400/+700 | 01121 | CR2225 |
| A11R13 | 0683-1035 | 1 | 3 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A11R14 | 0683-3325 | 6 | 3 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CR3325 |
| A11R15 | 0683-1125 | 0 | 1 | RESISTOR 1.1K 5% .25W FC TC=-400/+700 | 01121 | CR1125 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|------------------|
| A11R16 | 0683-3325 | 6 | | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A11R21 | 0683-1025 | 9 | 7 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R22 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R23 | 0683-4705 | 8 | 6 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R24 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R25 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R26 | 0683-3325 | 6 | | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A11R27 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R28 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R31 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A11R32 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R33 | 1810-0229 | 5 | 2 | NETWORK-RES 8-SIP330.0 OHM X 7 | 01121 | 208A331 |
| A11R34 | 0683-2715 | 6 | 1 | RESISTOR 270 5% .25W FC TC=-400/+600 | 01121 | CB2715 |
| A11R44 | 1810-0229 | 5 | | NETWORK-RES 8-SIP330.0 OHM X 7 | 01121 | 208A331 |
| A11R46 | 0683-5605 | 9 | 1 | RESISTOR 56 5% .25W FC TC=-400/+500 | 01121 | CB5605 |
| A11R47 | 0683-1215 | 9 | 1 | RESISTOR 120 5% .25W FC TC=-400/+600 | 01121 | CB1215 |
| A11R48 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A11R50 | 0683-1015 | 7 | 3 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A11R51 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R52 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R53 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A11R54 | 0683-6815 | 5 | 2 | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A11R55 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A11R56 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A11R57 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A11R61 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R62 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A11R63 | 0683-5135 | 0 | 1 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A11R70 | 0683-1055 | 5 | 1 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A11R71 | 0683-3015 | 1 | 1 | RESISTOR 300 5% .25W FC TC=-400/+600 | 01121 | CB3015 |
| A11R80 | 0757-0449 | 6 | 2 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A11R81 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A11R82 | 0683-8235 | 7 | 1 | RESISTOR 82K 5% .25W FC TC=-400/+800 | 01121 | CB8235 |
| A11R83 | 0683-3035 | 5 | 2 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A11R84 | 0683-3035 | 5 | | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A11R85 | 0683-1825 | 7 | 5 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R86 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R91 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R92 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A11R93 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R94 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R95 | 0683-4715 | 0 | 1 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A11R96 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A11U33 | 1820-0810 | 1 | 2 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A11U44 | 1820-0810 | 1 | | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A11U50 | 1826-0598 | 4 | 1 | IC 14-DIP-P PKG | 04713 | MC12002P |
| A11U60 | 1826-0026 | 3 | 1 | IC COMPARATOR PRCN TO-99 PKG | 01275 | LM311L |
| A11U70 | 1826-0599 | 5 | 1 | IC 16-DIP-P PKG | 04713 | MC14568BCP |
| A11U80 | 1820-0478 | 7 | 1 | IC OP AMP LOW BIAS-H-IMPD TO-99 PKG | 27014 | LM308H |
| A11U90 | 1826-0412 | 1 | 1 | IC COMPARATOR PRCN DUAL 8-DIP-P PKG | 27014 | LM393N |
| A11Y20 | 0410-0759 | 7 | 1 | CRYSTAL-QUARTZ 49.984375 MHZ | 28480 | 0410-0759 |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |
| A12 | 03586-66512 | 6 | 1 | PART OF 03586-66511 | 28480 | 03586-66512 |
| A12C1 | 0160-3752 | 5 | | CAPACITOR-FXD 1000PF +-10% 50VDC CER | 28480 | 0160-3752 |
| A12C2 | 0160-3752 | 5 | | CAPACITOR-FXD 1000PF +-10% 50VDC CER | 28480 | 0160-3752 |
| A12J1 | 1250-1512 | 3 | | CONNECTOR-RF SMD M PC 50-OHM | 28480 | 1250-1512 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A15 | 03586-66515 | 9 | 1 | TRACKING OUTPUT (3586A/B/C) | 28480 | 03586-66515 |
| A15C1 | 0140-0205 | 5 | 2 | CAPACITOR-FXD 62PF +-5% 360VDC MICA | 72136 | DM15F620J0360WV1CR |
| A15C2 | 0160-2258 | 4 | 1 | CAPACITOR-FXD 110PF +-5% 500VDC CER 01-30 | 28480 | 0160-2258 |
| A15C3 | 0140-0205 | 5 | 5 | CAPACITOR-FXD 62PF +-5% 360VDC MICA | 72136 | DM15F620J0360WV1CR |
| A15C4 | 0160-3879 | 7 | 10 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C5 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C6 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C7 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C8 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C9 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C10 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C11 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C12 | 0160-2204 | 9 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A15C13 | 0150-0091 | 8 | 1 | CAPACITOR-FXD 1.5PF +--.25PF 500VDC CER | 28480 | 0150-0091 |
| A15C14 | 0160-2203 | 9 | 1 | CAPACITOR-FXD 21PF +-5% 300VDC MICA 01-70 | 28480 | 0160-2203 |
| A15C15 | 0160-2257 | 3 | 1 | CAPACITOR-FXD 10PF +-5% 500VDC CER 01-60 | 28480 | 0160-2257 |
| A15C16 | 0160-2197 | 2 | 2 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2197 |
| A15C17 | 0160-2266 | 4 | 1 | CAPACITOR-FXD 24PF +-5% 500VDC CER 01-30 | 28480 | 0160-2266 |
| A15C19 | 0180-0106 | 9 | 1 | CAPACITOR-FXD 50UF+-20% 6VDC TA | 56259 | 150060X0006A2 |
| A15C20 | 0160-0576 | 5 | 11 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C21 | 0180-0309 | 4 | 3 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56259 | 1500475X0010A2 |
| A15C22 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 1500475X0010A2 |
| A15C23 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C24 | 0180-0197 | 8 | 2 | CAPACITOR-FXD 2.2UF+-10% 25VDC TA | 56289 | 1500225X9020A2 |
| A15C25 | 0180-0197 | 8 | 8 | CAPACITOR-FXD 2.2UF+-10% 25VDC TA | 56259 | 1500225X9020A2 |
| A15C26 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A15C27 | 0180-1701 | 2 | 3 | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56259 | 1500685X0006A2 |
| A15C28 | 0160-0162 | 5 | 1 | CAPACITOR-FXD .022UF +-10% 200VDC POLY E | 28480 | 0160-0162 |
| A15C29 | 0160-2197 | 2 | 2 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2197 |
| A15C30 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C31 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C32 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C33 | 0180-1701 | 2 | 2 | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56259 | 1500685X0006A2 |
| A15C34 | 0180-1701 | 2 | 2 | CAPACITOR-FXD 6.8UF+-20% 6VDC TA | 56289 | 1500685X0006A2 |
| A15C35 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C36 | 0180-0309 | 4 | 4 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 1500475X0010A2 |
| A15C37 | 0180-0228 | 6 | 2 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A15C38 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A15C39 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C40 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C41 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C42 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C43 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A15C44 | 0160-3874 | 2 | 1 | CAPACITOR-FXD 10PF +-1.5PF 280VDC CER | 28480 | 0160-3874 |
| A15C45 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15C46 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .010UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A15CR1 | 1902-0041 | 4 | 3 | DIODE-ZNR 5.11V 5% DO-35 PD=.4W | 28480 | 1902-0041 |
| A15CR2 | 1901-0050 | 3 | 4 | DIODE SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A15CR3 | 1901-0050 | 3 | 3 | DIODE SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A15CR4 | 1901-0535 | 9 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A15CR5 | 1901-0535 | 9 | 9 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A15CR6 | 1901-0535 | 9 | 9 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A15CR7 | 1901-0535 | 9 | 9 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A15CR9 | 1901-0050 | 3 | 3 | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A15CR10 | 1902-0041 | 4 | 4 | DIODE-ZNR 5.11V 5% DO-35 PD=.4W | 28480 | 1902-0041 |
| A15CR11 | 1901-0050 | 3 | 3 | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A15CR12 | 1902-0041 | 4 | 4 | DIODE-ZNR 5.11V 5% DO-35 PD=.4W | 28480 | 1902-0041 |
| A15J1 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A15J2 | 1250-1637 | 3 | 1 | CONNECTOR-RF SM-GNP M SCL-HOLE-FR 75-OHM | 28480 | 1250-1637 |
| A15L1 | 9140-0261 | 2 | 4 | INDUCTOR RF-CH-MLD 100NH 5% .166DX.385LG | 28480 | 9140-0261 |
| A15L2 | 9140-0395 | 3 | 1 | INDUCTOR RF-CH-MLD 560NH 5% .166DX.385LG | 28480 | 9140-0395 |
| A15L3 | 9140-0261 | 2 | 2 | INDUCTOR RF-CH-MLD 100NH 5% .166DX.385LG | 28480 | 9140-0261 |
| A15L4 | 9140-0261 | 2 | 2 | INDUCTOR RF-CH-MLD 100NH 5% .166DX.385LG | 28480 | 9140-0261 |
| A15L5 | 9100-3547 | 9 | 1 | INDUCTOR RF-CH-MLD 4.3UH 5% .166DX.385LG | 28480 | 9100-3547 |
| A15L6 | 9140-0261 | 2 | 2 | INDUCTOR RF-CH-MLD 100NH 5% .166DX.385LG | 28480 | 9140-0261 |
| A15L7 | 9100-3345 | 5 | 2 | INDUCTOR RF-CH-MLD 2UH 5% .166DX.385LG | 28480 | 9100-3345 |
| A15L8 | 9100-3345 | 5 | 5 | INDUCTOR RF-CH-MLD 2UH 5% .166DX.385LG | 28480 | 9100-3345 |
| A15L9 | 9100-3552 | 6 | 1 | INDUCTOR RF-CH-MLD 1.5UH 5% .166DX.385LG | 28480 | 9100-3552 |
| A15L10 | 9140-0210 | 1 | 3 | INDUCTOR RF-CH-MLD 100UH 5% .166DX.385LG | 28480 | 9140-0210 |
| A15L11 | 9140-0210 | 1 | 1 | INDUCTOR RF-CH-MLD 100UH 5% .166DX.385LG | 28480 | 9140-0210 |
| A15L12 | 9140-0210 | 1 | 1 | INDUCTOR RF-CH-MLD 100UH 5% .166DX.385LG | 28480 | 9140-0210 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|---------------------|
| A15Q1 | 1853-0354 | 7 | 3 | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0354 |
| A15Q2 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A15Q3 | 1853-0354 | 7 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0354 |
| A15Q4 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A15R1 | 0757-0383 | 7 | 1 | RESISTOR 18.2 1% .125W F TC=0+-100 | 19791 | MF4C1/8-T0-18R2-F |
| A15R2 | 0683-1315 | 0 | 1 | RESISTOR 130 5% .25W FC TC=-400/+600 | 01121 | CR1315 |
| A15R3 | 2100-3383 | 4 | 1 | RESISTOR-TMR 50 10% C TOP-ADJ 1-TRN | 28480 | 2100-3383 |
| A15R4 | 0683-3315 | 4 | 2 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A15R5 | 0683-4785 | 8 | 2 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CR4705 |
| A15R6 | 0683-4785 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CR4785 |
| A15R8 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CR4725 |
| A15R9 | 0683-1025 | 9 | 2 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CR1025 |
| A15R10 | 0683-2715 | 6 | 1 | RESISTOR 270 5% .25W FC TC=-400/+600 | 01121 | CR2715 |
| A15R11 | 0757-0481 | 0 | 2 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A15R13 | 0757-0407 | 6 | 1 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A15R14 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CR1025 |
| A15R15 | 0698-4451 | 2 | 2 | RESISTOR 340 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-340R-F |
| A15R16 | 0698-4451 | 2 | | RESISTOR 340 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-340P-F |
| A15R17 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A15R18 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CR1015 |
| A15R19 | 0683-1525 | 4 | 2 | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CR1525 |
| A15R20 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A15R21 | 0698-4438 | 5 | 1 | RESISTOR 3.07K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3091-F |
| A15R22 | 0757-0435 | 0 | 1 | RESISTOR 3.92K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3921-F |
| A15R23 | 0698-4453 | 4 | 2 | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A15R24 | 0698-7332 | 4 | 2 | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A15R25 | 0683-1045 | 3 | 2 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CR1045 |
| A15R26 | 0757-0398 | 4 | 1 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A15R27 | 0698-3488 | 3 | 2 | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-442R-F |
| A15R28 | 0698-3432 | 7 | 1 | RESISTOR 26.1 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-26R1-F |
| A15R29 | 0698-3438 | 3 | | RESISTOR 442 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-442R-F |
| A15R30 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CR1045 |
| A15R31 | 0698-4453 | 4 | | RESISTOR 402 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-402R-F |
| A15R32* | 0698-0077 | 0 | 1 | RESISTOR 93.1K 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-9312-F |
| A15R32* | 0698-4513 | 7 | 1 | RESISTOR 77.6K 1% .125W F TC=0+-100 | 03668 | PME55-1/8-T0-9762-F |
| A15R32* | 0757-0464 | 5 | 1 | RESISTOR 90.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9092-F |
| A15R32* | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A15R32* | 0757-0978 | 6 | 1 | RESISTOR 95.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9532-F |
| A15R33 | 0698-4285 | 4 | 1 | RESISTOR 21K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2182-F |
| A15R34 | 0698-7962 | 6 | 1 | RESISTOR 976K 1% .125W F TC=0+-100 | 07716 | CEA-1/8-T0-9763-F |
| A15R35 | 0698-7332 | 4 | | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A15R36 | 0698-3215 | 4 | 1 | RESISTOR 499K 1% .125W F TC=0+-100 | 28480 | 0698-3215 |
| A15R38 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A15R39 | 0683-2015 | 9 | 1 | RESISTOR 200 5% .25W FC TC=-400/+600 | 01121 | CR2015 |
| A15R40 | 0757-0280 | 3 | 2 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A15R41 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A15R42 | 0683-5135 | 0 | 1 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CR5135 |
| A15R43 | 0683-7525 | 6 | 3 | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CR7525 |
| A15R44 | 0683-7525 | 6 | | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CR7525 |
| A15R45 | 0757-0283 | 6 | 1 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A15R46 | 1810-0076 | 0 | 1 | NETWORK-RES 9-STP1.8K OHM X B | 28480 | 1810-0076 |
| A15R47 | 0698-4414 | 7 | 2 | RESISTOR 158 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-158R-F |
| A15R48 | 0698-4393 | 1 | 2 | RESISTOR 73.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-73R2-F |
| A15R49 | 0698-4414 | 7 | | RESISTOR 158 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-158R-F |
| A15R50 | 0698-4393 | 1 | | RESISTOR 73.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-73R2-F |
| A15R51 | 0683-4715 | 0 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A15R52 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CR1525 |
| A15R53 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A15R54 | 0683-2425 | 5 | 1 | RESISTOR 2.4K 5% .25W FC TC=-400/+700 | 01121 | CR2425 |
| A15R55 | 0683-7525 | 6 | | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CR7525 |
| A15U1 | 1826-0598 | 4 | 1 | IC 14-DIP-P PKG | 04713 | MC12002P |
| A15U2 | 1820-0270 | 7 | 1 | IC WIDEBAND AMPL VJD TO-100 PKG | 07263 | 733HC |
| A15U3 | 1820-0478 | 7 | 1 | IC OP AMP LGW-BIAS-H-IMPD TO-99 PKG | 27014 | LM308H |
| A15U4 | 1820-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A15U5 | 1820-0802 | 1 | 1 | IC GATE ECL NOR QUAD 2-INP | 04713 | MC10102P |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A16 | 03506-66516 | 3 | 1 | 10MHZ FREQUENCY REFERENCE (3506A/B/C) | 28480 | 03506-66516 |
| A16C1 | 0180-2635 | 3 | 1 | CAPACITOR-FXD 1000UF+50-10% 35VDC AL | 28480 | 0180-2635 |
| A16C2 | 0160-4571 | 8 | 3 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A16C3 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A16C4 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A16C5 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A16C10 | 0150-0012 | 3 | 1 | CAPACITOR-FXD .01UF +-20% 1KVDC CER | 56289 | C023A102J103MS38 |
| A16CR1 | 1990-0517 | 4 | 1 | LED LAMP LHM-INT=3MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4655 |
| A16CR2 | 1902-3205 | 8 | 1 | DIODE ZNR 15V 5% 80-35 PD=.4W TC=+.057% | 28480 | 1902-3205 |
| A16J1 | 1250-1195 | 8 | 1 | CONNECTOR-RF SM-SLD M PC 50-OHM | 28480 | 1250-1195 |
| A16Q1 | 1053-0020 | 4 | 1 | TRANSISTOR PNP SI PD=300MW FT=150MHZ | 28480 | 1053-0020 |
| A16Q2 | 1054-0094 | 4 | 2 | TRANSISTOR NPN SI PD=200MW FT=350MHZ | 28480 | 1054-0094 |
| A16Q3 | 1054-0094 | 4 | | TRANSISTOR NPN SI PD=200MW FT=350MHZ | 28480 | 1054-0094 |
| A16R1 | 0011-3069 | 8 | 1 | RESISTOR 1 5% .5W PW TC=0+-150 | 75042 | BW20-1-1R0-J |
| A16R2 | 0698-3515 | 7 | 2 | RESISTOR 5.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5901-F |
| A16R3 | 0698-3160 | 8 | 1 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A16R4 | 0698-3515 | 7 | 1 | RESISTOR 5.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5901-F |
| A16R5 | 0698-4492 | 1 | 1 | RESISTOR 32.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3242-F |
| A16R6 | 0683-1025 | 9 | 2 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A16R7 | 2100-3351 | 6 | 1 | RESISTOR-TRMR 500 10% C SIDE-ADJ 1-TRN | 20480 | 2100-3351 |
| A16R8 | 0683-2025 | 1 | 3 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A16R10 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A16R11 | 0683-1645 | 9 | 1 | RESISTOR 160K 5% .25W FC TC=-800/+900 | 01121 | CB1645 |
| A16R12 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A16R13 | 0698-4470 | 5 | 1 | RESISTOR 6.98K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6981-F |
| A16R14 | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |
| A16R15 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A16R16 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A16R17 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A16R18 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A16R22 | 0683-1015 | 7 | 2 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A16R24 | 0686-8215 | 9 | 1 | RESISTOR 820 5% .5W CC TC=0/+529 | 01121 | EB8215 |
| A16R25 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A16R26 | 0683-3915 | 0 | 1 | RESISTOR 390 5% .25W FC TC=-400/+600 | 01121 | CB3915 |
| A16U1 | 1826-0203 | 8 | 1 | IC 7815 V RGLTR TO-3 | 07263 | 7815KC |
| A16U2 | 1826-0678 | 1 | 1 | IC OP AMP GP DUAL TO-99 PKG | 27014 | LM358H |
| A16U3 | 0760-0568 | 1 | 1 | HI STAB OSC. | 28480 | 0760-0568 |
| | 1250-1499 | 5 | 1 | ADAPTER-COAX RTANG M-BNC F-BNC | 28480 | 1250-1499 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A20 | 03586-66520 | 6 | 1 | IF FILTER -2000HZ (3586B) | 28480 | 03586-66520 |
| A20C3 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C4 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C11 | 0180-0374 | 3 | 2 | CAPACITOR-FXD 16UF+-10% 20VDC TA | 56289 | 150D106X9020B2 |
| A20C12 | 0180-0374 | 3 | 2 | CAPACITOR-FXD 16UF+-10% 20VDC TA | 56289 | 150D106X9020B2 |
| A20C32 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-ATR 1.2-3.5PF 350V | 08590 | 18-1326-25004-910 |
| A20C34 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C35 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C36 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C41 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C42 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-ATR 1.2-3.5PF 350V | 08590 | 18-1326-25004-910 |
| A20C51 | 0140-0223 | 7 | 1 | CAPACITOR-FXD 260PF +-1% 300VDC MICA | 72136 | DM15F261F0300WV1C |
| A20C52 | 0160-3844 | 6 | 1 | CAPACITOR-FXD 170PF +-1% 100VDC MICA | 28480 | 0160-3844 |
| A20C53 | 0160-3843 | 5 | 1 | CAPACITOR-FXD 560PF +-1% 100VDC MICA | 28480 | 0160-3843 |
| A20C54 | 0140-0172 | 5 | 3 | CAPACITOR-FXD 3300PF +-1% 100VDC MICA | 72136 | DM19F302F0100WV1CR |
| A20C55 | 0160-3085 | 7 | 3 | CAPACITOR-FXD 510PF +-1% 300VDC MICA | 28480 | 0160-3085 |
| A20C56 | 0160-0136 | 3 | 1 | CAPACITOR-FXD 2500PF +-1% 300VDC MICA | 28480 | 0160-0136 |
| A20C57 | 0140-0172 | 5 | 3 | CAPACITOR-FXD 3000PF +-1% 100VDC MICA | 72136 | DM19F302F0100WV1CR |
| A20C58 | 0160-3793 | 4 | 1 | CAPACITOR-FXD 680PF +-1% 100VDC MICA | 28480 | 0160-3793 |
| A20C59 | 0160-3156 | 3 | 1 | CAPACITOR-FXD 750PF +-1% 300VDC MICA | 28480 | 0160-3156 |
| A20C60 | 0140-0172 | 5 | 3 | CAPACITOR-FXD 3300PF +-1% 100VDC MICA | 72136 | DM19F302F0100WV1CR |
| A20C61 | 0160-0841 | 7 | 2 | CAPACITOR-FXD 1740PF +-1% 300VDC MICA | 28480 | 0160-0841 |
| A20C62 | 0160-3085 | 7 | 2 | CAPACITOR-FXD 510PF +-1% 300VDC MICA | 28480 | 0160-3085 |
| A20C63 | 0160-0841 | 7 | 2 | CAPACITOR-FXD 1740PF +-1% 300VDC MICA | 28480 | 0160-0841 |
| A20C64 | 0160-2587 | 2 | 1 | CAPACITOR-FXD 4000PF +-1% 100VDC MICA | 28480 | 0160-2587 |
| A20C65 | 0160-3085 | 7 | 2 | CAPACITOR-FXD 510PF +-1% 300VDC MICA | 28480 | 0160-3085 |
| A20C66 | 0140-0225 | 9 | 1 | CAPACITOR-FXD 308PF +-1% 300VDC MICA | 72136 | DM15F301F0300WV1C |
| A20C67 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C81 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C82 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C91 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C92 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C93 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A20C151 | 0140-0202 | 2 | 1 | CAPACITOR-FXD 15PF +-5% 500VDC MICA | 72136 | DM15C150J0500WV1CR |
| A20C153 | 0160-2307 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A20C154 | 0160-3024 | 4 | 1 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A20C155 | 0160-0356 | 9 | 1 | CAPACITOR-FXD 16PF +-5% 300VDC MICA | 28480 | 0160-0356 |
| A20C156 | 0140-0190 | 7 | 1 | CAPACITOR-FXD 39PF +-5% 300VDC MICA | 72136 | DM15E390J0300WV1CR |
| A20C157 | 0160-2203 | 9 | 1 | CAPACITOR-FXD 91PF +-5% 300VDC MICA 0+70 | 28480 | 0160-2203 |
| A20C158 | 0140-0209 | 9 | 2 | CAPACITOR-FXD 5PF +-10% 500VDC MICA | 72136 | DM15C050K0500WV1CR |
| A20C159 | 0160-2199 | 2 | 1 | CAPACITOR-FXD 30PF +-5% 300VDC MICA | 28480 | 0160-2199 |
| A20C160 | 0140-0199 | 6 | 1 | CAPACITOR-FXD 240PF +-5% 300VDC MICA | 72136 | DM15F241J0300WV1CR |
| A20C161 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A20C164 | 0160-0342 | 3 | 1 | CAPACITOR-FXD 800PF +-1% 300VDC MICA | 28480 | 0160-0342 |
| A20C166 | 0140-0209 | 9 | 2 | CAPACITOR-FXD 5PF +-10% 500VDC MICA | 72136 | DM15C050K0500WV1CR |
| A20CR1- A20CR4 | 1901-0535 | 9 | 4 | DIODE-5M SIG SCHOTTKY | 28480 | 1901-0535 |
| A20L51 | 9140-0357 | 7 | 2 | COIL-VARIABLE 235. MH; +-3% MIN; Q | 28480 | 9140-0357 |
| A20L52 | 9140-0363 | 5 | 1 | COIL-VARIABLE 18.30 MH; +-3% MIN; Q MIN | 28480 | 9140-0363 |
| A20L53 | 9140-0357 | 7 | 2 | COIL-VARIABLE 235. MH; +-3% MIN; Q | 28480 | 9140-0357 |
| A20L54 | 9140-0364 | 6 | 1 | COIL-VARIABLE 27.50 MH; +-3% MIN; Q MIN | 28480 | 9140-0364 |
| A20L55 | 9140-0365 | 7 | 1 | COIL-VARIABLE 164. MH; +-3% MIN; Q | 28480 | 9140-0365 |
| A20L56 | 9140-0366 | 8 | 1 | COIL-VARIABLE 44.5 MH; +-3% MIN; Q MIN | 28480 | 9140-0366 |
| A20L57 | 9140-0367 | 9 | 1 | COIL-VARIABLE 31.40 MH; +-3% MIN; Q MIN | 28480 | 9140-0367 |
| A20L58 | 9140-0355 | 5 | 1 | COIL-VARIABLE 124. MH; +-3% MIN; Q | 28480 | 9140-0355 |
| A20L59 | 9140-0368 | 0 | 1 | COIL-VARIABLE 10.2 MH; +-3% MIN; Q MIN | 28480 | 9140-0368 |
| A20L91 | 9140-0380 | 6 | 1 | COIL-VARIABLE 11.8 MH; +-3% MIN; Q MIN | 28480 | 9140-0380 |
| A20L92 | 9140-0381 | 7 | 1 | COIL-VARIABLE 9.2 MH; +-3% MIN; Q MIN | 28480 | 9140-0381 |
| A20R1 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R2 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R3 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R4 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R5 | 0698-4433 | 0 | 1 | RESISTOR 2.26K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2261-F |
| A20R6 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R7 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R8 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R9* | 0698-3160 | 8 | 2 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A20R9* | 0698-3162 | 0 | 2 | RESISTOR 46.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4642-F |
| A20R9* | 0698-4511 | 5 | 2 | RESISTOR 86.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8662-F |
| A20R9* | 9757-0469 | 0 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A20R10 | 0698-4431 | 8 | 1 | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A20R11 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R12 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R13 | 0683-6835 | 9 | 3 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R14 | 0683-5135 | 0 | 3 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R15 | 0683-6835 | 9 | | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R16 | 0683-5135 | 0 | | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R17 | 0683-6835 | 9 | | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R18 | 0683-5135 | 0 | | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R21 | 0757-0401 | 0 | 2 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R22 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R23 | 0698-3279 | 0 | 0 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R24 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20R25 | 0757-0462 | 3 | 1 | RESISTOR 75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7502-F |
| A20R26 | 0698-4499 | 8 | 2 | RESISTOR 54.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5492-F |
| A20R27 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R28 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R29 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R30 | 0757-0123 | 3 | 1 | RESISTOR 34.6K 1% .125W F TC=0+-100 | 28480 | 0757-0123 |
| A20R31 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R32 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R33 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R34 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R35 | 2100-3214 | 0 | 1 | RESISTOR-TRMR 100K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3214 |
| A20R36 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R37 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R38 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R39 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A20R40 | 2100-3210 | 6 | 1 | RESISTOR-TRMR 10K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3210 |
| A20R51 | 0698-3151 | 7 | 1 | RESISTOR 2.87K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2871-F |
| A20R52 | 0757-0441 | 8 | 1 | RESISTOR 8.25K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8251-F |
| A20R53 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R81 | 0698-0369 | 5 | 1 | RESISTOR 110.5K 1% .125W F TC=0+-25 | 28480 | 0698-0369 |
| A20R82 | 0698-6624 | 5 | 1 | RESISTOR 2K .1% .125W F TC=0+-25 | 28480 | 0698-6624 |
| A20R83 | 0698-8059 | 4 | | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MFAC1/8-T9-4321-B |
| A20R84 | 0698-3444 | 1 | 1 | RESISTOR 316 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-316R-F |
| A20R85 | 0698-4428 | 3 | 1 | RESISTOR 1.69K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1691-F |
| A20R86* | 0698-3160 | 8 | | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A20R86* | 0698-3162 | 0 | | RESISTOR 46.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4642-F |
| A20R86* | 0698-4511 | 5 | | RESISTOR 86.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8662-F |
| A20R86* | 0757-0451 | 0 | 1 | RESISTOR 24.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2432-F |
| A20R91 | 0698-3228 | 9 | 2 | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A20R92 | 0698-3228 | 9 | | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A20R93 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R94 | 0698-4499 | 8 | | RESISTOR 54.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5492-F |
| A20R95 | 2100-3253 | 7 | | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20U1 | 1826-0217 | 4 | 2 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U2 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A20U3 | 1826-0417 | 6 | 2 | IC SWITCH ANLG QUAD 16-DIP C PKG | 27014 | LF13333D |
| A20U4 | 1826-0417 | 6 | | IC SWITCH ANLG QUAD 16-DIP C PKG | 27814 | LF13333D |
| A20U6 | 1826-0222 | 1 | 1 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A20U7 | 1826-0217 | 4 | | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U9 | 1826-0476 | 7 | 1 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A20U10 | 1826-0715 | 7 | 1 | IC OP AMP LOW-NOISE 8-DIP-P PKG | 18324 | NE5534AN |
| A20U11 | 1826-0081 | 0 | 1 | IC OP AMP WB TO-99 PKG | 27014 | LM318H |
| A20Y1** | 0410-0765 | 5 | 4 | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y2 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y3 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y4 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |

**WHEN -HP- PART NUMBER 0410-0765 IS ORDERED, A MATCHED SET OF 2 CRYSTALS WILL BE SENT: 1 EACH 15.613KHZ AND 1 EACH 15.637KHZ.

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|----------------------|
| A20 | 03586-66523 | 9 | 1 | 1F FILTER 3100HZ (3506A/B/C) | 28480 | 03586-66523 |
| A20C3 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C4 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C11 | 0180-0374 | 3 | 2 | CAPACITOR-FXD 10UF+10% 20VDC TA | 56289 | 150D106X9020B2 |
| A20C12 | 0180-0374 | 3 | 3 | CAPACITOR-FXD 10UF+10% 20VDC TA | 56289 | 150D106X9020B2 |
| A20C32 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A20C34 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C35 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C36 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C41 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C42 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A20C51 | 0160-2373 | 4 | 1 | CAPACITOR-FXD 4700PF +-2% 300VDC MICA | 28480 | 0160-2373 |
| A20C52 | 0140-0231 | 7 | 1 | CAPACITOR-FXD 440PF +-1% 300VDC MICA | 72136 | DM15F441F0300WV1C |
| A20C53 | 0140-0226 | 0 | 1 | CAPACITOR-FXD 320PF +-1% 300VDC MICA | 72136 | DM15F321F0300WV1C |
| A20C54 | 0160-2387 | 0 | 3 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A20C55 | 0160-0136 | 3 | 3 | CAPACITOR-FXD 2500PF +-1% 300VDC MICA | 28480 | 0160-0136 |
| A20C56 | 0140-0155 | 4 | 2 | CAPACITOR-FXD 1325PF +-1% 500VDC MICA | 72136 | DM20F1325RF0500WV1CR |
| A20C57 | 0160-3288 | 2 | 1 | CAPACITOR-FXD 530PF +-1% 100VDC MICA | 28480 | 0160-3288 |
| A20C58 | 0160-3843 | 5 | 1 | CAPACITOR-FXD 560PF +-1% 100VDC MICA | 28480 | 0160-3843 |
| A20C59 | 0160-3024 | 4 | 1 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A20C60 | 0160-0136 | 3 | 3 | CAPACITOR-FXD 2500PF +-1% 300VDC MICA | 28480 | 0160-0136 |
| A20C61 | 0160-3156 | 3 | 2 | CAPACITOR-FXD 750PF +-1% 300VDC MICA | 28480 | 0160-3156 |
| A20C62 | 0140-0228 | 2 | 1 | CAPACITOR-FXD 360PF +-1% 300VDC MICA | 72136 | DM15F361F0300WV1C |
| A20C63 | 0140-0155 | 4 | 2 | CAPACITOR-FXD 1325PF +-1% 500VDC MICA | 72136 | DM20F1325RF0500WV1CR |
| A20C64 | 0140-0172 | 5 | 1 | CAPACITOR-FXD 3000PF +-1% 100VDC MICA | 72136 | DM19F302F0100WV1CR |
| A20C65 | 0160-2387 | 0 | 3 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A20C66 | 0160-0952 | 1 | 1 | CAPACITOR-FXD 220PF +-1% 300VDC MICA | 28480 | 0160-0952 |
| A20C67 | 0160-2387 | 0 | 3 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A20C68 | 0160-3840 | 2 | 1 | CAPACITOR-FXD 7800PF +-1% 100VDC MICA | 28480 | 0160-3840 |
| A20C69 | 0160-3156 | 3 | 2 | CAPACITOR-FXD 750PF +-1% 300VDC MICA | 28480 | 0160-3156 |
| A20C70 | 0160-0136 | 3 | 3 | CAPACITOR-FXD 2500PF +-1% 300VDC MICA | 28480 | 0160-0136 |
| A20C71 | 0160-4317 | 0 | 1 | CAPACITOR-FXD 1200PF +-1% 100VDC MICA | 28480 | 0160-4317 |
| A20C72 | 0140-0184 | 7 | 1 | CAPACITOR-FXD 8200PF +-1% 100VDC MICA | 72136 | DM20F822F0100WV1CR |
| A20C81 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C82 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C91 | 0160-3548 | 7 | 2 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C92 | 0160-3548 | 7 | 2 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C93 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A20C151 | 0160-2205 | 1 | 1 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A20C152 | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-0196 |
| A20C153 | 0160-2150 | 5 | 4 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C154 | 0140-0197 | 4 | 1 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A20C155 | 0140-0220 | 4 | 2 | CAPACITOR-FXD 210PF +-1% 300VDC MICA | 72136 | DM15F201F0300WV1CR |
| A20C156 | 0160-2150 | 5 | 1 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C157 | 0160-2015 | 1 | 2 | CAPACITOR-FXD 15PF +-5% 500VDC MICA | 28480 | 0160-2015 |
| A20C158 | 0160-2198 | 1 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-2198 |
| A20C159 | 0140-0196 | 3 | 1 | CAPACITOR-FXD 150PF +-5% 300VDC MICA | 72136 | DM15F151J0300WV1CR |
| A20C160 | 0140-0191 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15F56J0300WV1CR |
| A20C161 | 0160-2150 | 5 | 1 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C162 | 0160-2197 | 0 | 1 | CAPACITOR-FXD 10PF +-5% 300VDC MICA | 28480 | 0160-2197 |
| A20C163 | 0160-2307 | 4 | 3 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A20C164 | 0160-0945 | 2 | 1 | CAPACITOR-FXD 910PF +-5% 100VDC MICA | 28480 | 0160-0945 |
| A20C165 | 0160-2150 | 5 | 1 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C166 | 0160-2015 | 1 | 1 | CAPACITOR-FXD 15PF +-5% 500VDC MICA | 28480 | 0160-2015 |
| A20C167 | 0160-2307 | 4 | 3 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A20C168 | 0160-2307 | 4 | 3 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A20C169 | 0140-0220 | 4 | 1 | CAPACITOR-FXD 200PF +-1% 300VDC MICA | 72136 | DM15F201F0300WV1CR |
| A20C170 | 0160-2025 | 3 | 1 | CAPACITOR-FXD 220PF +-5% 500VDC MICA | 28480 | 0160-2025 |
| A20C171 | 0140-0194 | 1 | 1 | CAPACITOR-FXD 110PF +-5% 300VDC MICA | 72136 | DM15F111J0300WV1CR |
| A20C172 | 0160-0363 | 8 | 1 | CAPACITOR-FXD 620PF +-5% 300VDC MICA | 28480 | 0160-0363 |
| A20CR1 | 1901-0535 | 9 | 2 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20CR2 | 1901-0535 | 9 | 2 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20CR3 | 1901-0040 | 1 | 2 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A20CR4 | 1901-0040 | 1 | 2 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A20L51 | 0140-0354 | 4 | 2 | COIL-VARIABLE 21.05 MH; +-3% MIN; Q MIN | 28480 | 0140-0354 |
| A20L52 | 0140-0355 | 5 | 2 | COIL-VARIABLE 126. MH; +-3% MIN; Q | 28480 | 0140-0355 |
| A20L53 | 0140-0355 | 5 | 2 | COIL-VARIABLE 126. MH; +-3% MIN; Q | 28480 | 0140-0355 |
| A20L54 | 0140-0356 | 6 | 1 | COIL-VARIABLE 55. MH; +-3% MIN; Q MIN | 28480 | 0140-0356 |
| A20L55 | 0140-0357 | 7 | 1 | COIL-VARIABLE 235. MH; +-3% MIN; Q | 28480 | 0140-0357 |
| A20L56 | 0140-0358 | 8 | 1 | COIL-VARIABLE 31.3 MH; +-3% MIN; Q MIN | 28480 | 0140-0358 |
| A20L57 | 0140-0359 | 9 | 1 | COIL-VARIABLE 359. MH; +-3% MIN; Q | 28480 | 0140-0359 |
| A20L58 | 0140-0354 | 4 | 2 | COIL-VARIABLE 21.05 MH; +-3% MIN; Q MIN | 28480 | 0140-0354 |
| A20L59 | 0140-0360 | 2 | 1 | COIL-VARIABLE 536. MH; +-3% MIN; Q | 28480 | 0140-0360 |
| A20L60 | 0140-0361 | 3 | 1 | COIL-VARIABLE 10.70 MH; +-3% MIN; Q MIN | 28480 | 0140-0361 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A20L61 | 9140-0362 | 4 | 1 | COIL-VARIABLE 92.9 MH; +-3% MIN; Q MIN | 28480 | 9140-0362 |
| A20L91 | 9140-0378 | 2 | 1 | COIL-VARIABLE 12.6 MH; +-3% MIN; Q MIN | 28480 | 9140-0378 |
| A20L92 | 9140-0379 | 3 | 1 | COIL-VARIABLE 8.6 MH; +-3% MIN; Q MIN | 28480 | 9140-0379 |
| A20R1 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R2 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R3 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R4 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R5 | 0698-4433 | 0 | 1 | RESISTOR 2.26K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2261-F |
| A20R6 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R7 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R8 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R9* | 0698-3160 | 8 | 2 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A20R9* | 0698-3162 | 0 | 2 | RESISTOR 46.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4642-F |
| A20R9* | 0698-4511 | 5 | 2 | RESISTOR 86.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8662-F |
| A20R9* | 0757-0469 | 0 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |
| A20R10 | 0698-4431 | 8 | 1 | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A20R11 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R12 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R13 | 0683-6035 | 7 | 3 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R14 | 0683-5135 | 0 | 3 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R15 | 0683-6035 | 9 | 3 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R16 | 0683-5135 | 0 | 3 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R17 | 0683-6035 | 9 | 3 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R18 | 0683-5135 | 0 | 3 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R21* | 0698-4408 | 9 | 2 | RESISTOR 124 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-124R-F |
| A20R21* | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A20R21* | 0757-0398 | 4 | 2 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A20R21* | 0757-0401 | 0 | 2 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R22 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R23 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R24 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20R25 | 0757-0462 | 3 | 1 | RESISTOR 75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7502-F |
| A20R26 | 0698-4499 | 8 | 1 | RESISTOR 54.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5492-F |
| A20R27 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R28 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R29 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R30 | 0757-0123 | 3 | 1 | RESISTOR 34.5K 1% .125W F TC=0+-100 | 28480 | 0757-0123 |
| A20R31* | 0698-4408 | 9 | 2 | RESISTOR 124 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-124R-F |
| A20R31* | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A20R31* | 0757-0398 | 4 | 2 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A20R31* | 0757-0401 | 0 | 2 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R32 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R33 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R34 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R35 | 2100-3214 | 0 | 1 | RESISTOR-TRMR 100K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3214 |
| A20R36 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R37 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R38 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R39 | 0757-0453 | 2 | 3 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A20R40 | 2100-3210 | 6 | 1 | RESISTOR-TRMR 10K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3210 |
| A20R51 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R52 | 0698-3540 | 8 | 1 | RESISTOR 15.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1542-F |
| A20R51 | 0698-0369 | 5 | 1 | RESISTOR 110.5K .1% .125W F TC=0+-25 | 28480 | 0698-0369 |
| A20R52 | 0698-6624 | 5 | 1 | RESISTOR 2K .1% .125W F TC=0+-25 | 28480 | 0698-6624 |
| A20R53 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-4321-B |
| A20R54 | 0698-3444 | 1 | 1 | RESISTOR 316 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-316R-F |
| A20R55 | 0698-4478 | 3 | 1 | RESISTOR 1.69K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1691-F |
| A20R56* | 0698-3160 | 8 | 2 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A20R56* | 0698-3162 | 0 | 2 | RESISTOR 46.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4642-F |
| A20R56* | 0698-4511 | 5 | 2 | RESISTOR 86.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8662-F |
| A20R56* | 0757-0451 | 0 | 1 | RESISTOR 24.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2432-F |
| A20R91 | 0757-0453 | 2 | 2 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A20R92 | 0757-0453 | 2 | 2 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A20R93 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R94 | 0698-3499 | 6 | 1 | RESISTOR 40.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4022-F |
| A20R95 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20U1 | 1826-0217 | 4 | 2 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U2 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 31585 | CA307T |
| A20U3 | 1826-0417 | 6 | 2 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF1333D |
| A20U4 | 1826-0417 | 6 | 2 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF1333D |
| A20U6 | 1826-0222 | 1 | 1 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A20U7 | 1826-0217 | 4 | 2 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U9 | 1826-0476 | 7 | 1 | IC SWITCH ANLG 8-DIP-P PKG | 31295 | TL601CP |
| A20U10 | 1826-0715 | 7 | 1 | IC OP AMP LOW-NOISE 8-DIP-P PKG | 19324 | NE5334AN |
| A20U11 | 1826-0081 | 0 | 1 | IC OP AMP WB TO-99 PKG | 27014 | LM318H |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|--|----------|-----------------|
| A20Y** | 0410-0765 | 5 | 4 | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y2 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y3 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y4 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| | | | | **WHEN -HP- PART NUMBER 0410-0765 IS ORDERED, A MATCHED SET OF 2 CRYSTALS WILL BE SENT: 1 EACH 15.613KHS AND 1 EACH 15.637KHZ. | | |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|----------------------|
| A20 | 03586-66524 | 0 | 1 | IF FILTER-1740HZ (3586A/B) | 28480 | 03586-66524 |
| A20C3 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C4 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C11 | 0180-0374 | 3 | 2 | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020R2 |
| A20C12 | 0180-0374 | 3 | 2 | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020R2 |
| A20C32 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A20C34 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C35 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C36 | 0160-3847 | 9 | 4 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A20C41 | 0160-2940 | 1 | 2 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A20C42 | 0121-0162 | 3 | 2 | CAPACITOR-V TRMR-AIR 1.2-3.5PF 350V | 08590 | 10-1326-25004-910 |
| A20C51 | 0160-0952 | 1 | 1 | CAPACITOR-FXD 220PF +-1% 300VDC MICA | 28480 | 0160-0952 |
| A20C52 | 0160-0336 | 5 | 1 | CAPACITOR-FXD 100PF +-1% 300VDC MICA | 28480 | 0160-0336 |
| A20C53 | 0160-0234 | 0 | 1 | CAPACITOR-FXD 500PF +-1% 300VDC MICA | 72136 | DM15F501F0300WV1C |
| A20C54 | 0160-2587 | 2 | 2 | CAPACITOR-FXD 4000PF +-1% 100VDC MICA | 28480 | 0160-2587 |
| A20C55 | 0140-0177 | 0 | 1 | CAPACITOR-FXD 460PF +-1% 300VDC MICA | 72136 | DM15F401F0300WV1CR |
| A20C56 | 0140-0235 | 1 | 1 | CAPACITOR-FXD 2250PF +-1% 300VDC MICA | 72136 | DM20F2250RF0300WV1C |
| A20C57 | 0160-0136 | 3 | 1 | CAPACITOR-FXD 2500PF +-1% 300VDC MICA | 28480 | 0160-0136 |
| A20C58 | 0160-3085 | 7 | 1 | CAPACITOR-FXD 510PF +-1% 300VDC MICA | 28480 | 0160-3085 |
| A20C59 | 0160-3843 | 5 | 1 | CAPACITOR-FXD 540PF +-1% 100VDC MICA | 28480 | 0160-3843 |
| A20C60 | 0140-3172 | 5 | 1 | CAPACITOR-FXD 3000PF +-1% 100VDC MICA | 72136 | DM19F302F0100WV1CR |
| A20C61 | 0160-4317 | 0 | 1 | CAPACITOR-FXD 1200PF +-1% 100VDC MICA | 28480 | 0160-4317 |
| A20C62 | 0160-0228 | 2 | 1 | CAPACITOR-FXD 360PF +-1% 300VDC MICA | 72136 | DM15F361F0300WV1C |
| A20C63 | 0140-0155 | 4 | 1 | CAPACITOR-FXD 1325PF +-1% 500VDC MICA | 72136 | DM20F1325RF0500WV1CR |
| A20C64 | 0160-2587 | 2 | 2 | CAPACITOR-FXD 4000PF +-1% 100VDC MICA | 28480 | 0160-2587 |
| A20C65 | 0160-3288 | 2 | 1 | CAPACITOR-FXD 530PF +-1% 100VDC MICA | 28480 | 0160-3288 |
| A20C66 | 0160-0191 | 0 | 1 | CAPACITOR-FXD 272PF +-1% 300VDC MICA | 28480 | 0160-0191 |
| A20C67 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C81 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C82 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A20C91 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C92 | 0160-3548 | 7 | 3 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A20C93 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A20C151 | 0140-0209 | 9 | 2 | CAPACITOR-FXD 5PF +-10% 500VDC MICA | 72136 | DM15C050K0500WV1CR |
| A20C152 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A20C153 | 0140-0209 | 9 | 2 | CAPACITOR-FXD 5PF +-10% 500VDC MICA | 72136 | DM15C050K0500WV1CR |
| A20C154 | 0140-0197 | 4 | 2 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A20C155 | 0160-2150 | 5 | 2 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C156 | 0160-2205 | 1 | 1 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A20C157 | 0140-0197 | 4 | 2 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A20C158 | 0160-0190 | 7 | 1 | CAPACITOR-FXD 32PF +-5% 300VDC MICA | 72136 | DM15E390J0300WV1CR |
| A20C159 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A20C161 | 0160-2025 | 3 | 1 | CAPACITOR-FXD 220PF +-5% 500VDC MICA | 28480 | 0160-2025 |
| A20C162 | 0160-2150 | 5 | 2 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A20C163 | 0140-0202 | 2 | 1 | CAPACITOR-FXD 15PF +-5% 500VDC MICA | 72136 | DM15C150J0500WV1CR |
| A20C164 | 0140-0226 | 0 | 1 | CAPACITOR-FXD 320PF +-1% 300VDC MICA | 72136 | DM15F321F0300WV1C |
| A20C165 | 0160-2307 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A20CR1 | 1901-0535 | 9 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20CR2 | 1901-0535 | 9 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20CR3 | 1901-0535 | 9 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20CR4 | 1901-0535 | 9 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A20L51 | 9140-0369 | 1 | 2 | COIL-VARIABLE 279. MH; +-3% MIN; Q | 28480 | 9140-0369 |
| A20L52 | 9140-0354 | 4 | 1 | COIL-VARIABLE 21.05 MH; +-3% MIN; Q MIN | 28480 | 9140-0354 |
| A20L53 | 9140-0369 | 1 | 2 | COIL-VARIABLE 279. MH; +-3% MIN; Q | 28480 | 9140-0369 |
| A20L54 | 9140-0371 | 5 | 1 | COIL-VARIABLE 32.10 MH; +-3% MIN; Q MTN | 28480 | 9140-0371 |
| A20L55 | 9140-0372 | 6 | 1 | COIL-VARIABLE 269. MH; +-3% MIN; Q | 28480 | 9140-0372 |
| A20L56 | 9140-0373 | 7 | 1 | COIL-VARIABLE 57.30 MH; +-3% MIN; Q MIN | 28480 | 9140-0373 |
| A20L57 | 9140-0374 | 8 | 1 | COIL-VARIABLE 104. MH; +-3% MIN; Q | 28480 | 9140-0374 |
| A20L58 | 9140-0375 | 9 | 1 | COIL-VARIABLE 121. MH; +-3% MIN; Q | 28480 | 9140-0375 |
| A20L59 | 9140-0368 | 0 | 1 | COIL-VARIABLE 10.2 MH; +-3% MIN; Q MIN | 28480 | 9140-0368 |
| A20L91 | 9140-0382 | 8 | 1 | COIL-VARIABLE 11.6 MH; +-3% MIN; Q MIN | 28480 | 9140-0382 |
| A20L92 | 9140-0383 | 9 | 1 | COIL-VARIABLE 9.5 MH; +-3% MIN; Q MIN | 28480 | 9140-0383 |
| A20R1 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R2 | 0698-6323 | 1 | 4 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R3 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19791 | MF4C1/8-T9-4321-F |
| A20R4 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19791 | MF4C1/8-T9-4321-F |
| A20R5 | 0698-4453 | 0 | 1 | RESISTOR 2.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2261-F |
| A20R6 | 0698-8059 | 4 | 4 | RESISTOR 4.32K .1% .125W F TC=0+-25 | 19791 | MF4C1/8-T9-4321-F |
| A20R7 | 0698-6323 | 1 | 1 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R8 | 0698-6323 | 1 | 1 | RESISTOR 100 .1% .125W F TC=0+-25 | 28480 | 0698-6323 |
| A20R9* | 0698-3160 | 8 | 1 | RESISTOR 31.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3162-F |
| A20R9* | 0698-3162 | 0 | 1 | RESISTOR 46.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4642-F |
| A20R9* | 0698-4511 | 5 | 1 | RESISTOR 86.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8662-F |
| A20R9* | 0757-0469 | 0 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A20R10 | 0698-4431 | 8 | 1 | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A20R11 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R12 | 0757-0346 | 2 | 2 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A20R13 | 0683-6835 | 9 | 3 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R14 | 0683-5135 | 0 | 3 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R15 | 0683-6835 | 9 | | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R16 | 0683-5135 | 0 | | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R17 | 0683-6835 | 9 | | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A20R18 | 0683-5135 | 0 | - | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A20R21 | 0757-0401 | 0 | 2 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R22 | 0698-3279 | 0 | 4 | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R23 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R24 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20R25 | 0757-0462 | 3 | 1 | RESISTOR 75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7502-F |
| A20R26 | 0698-4499 | 8 | 2 | RESISTOR 54.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5492-F |
| A20R27 | 0757-0465 | 6 | 4 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R28 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R29 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R30 | 0757-0123 | 3 | 1 | RESISTOR 34.8K 1% .125W F TC=0+-100 | 28480 | 0757-0123 |
| A20R31 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A20R32 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R33 | 0698-3279 | 0 | | RESISTOR 4.99K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A20R34 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R35 | 2100-3214 | 0 | 1 | RESISTOR-TRMR 100K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3214 |
| A20R36 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R37 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R38 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R39 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A20R40 | 2100-3210 | 6 | 1 | RESISTOR-TRMR 10K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3210 |
| A20R51 | 0698-4435 | 2 | 1 | RESISTOR 2.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2491-F |
| A20R52 | 0698-4020 | 1 | 1 | RESISTOR 9.53K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9531-F |
| A20R53 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A20R81 | 0699-0369 | 5 | 1 | RESISTOR 110.5K 1% .125W F TC=0+-25 | 28480 | 0699-0369 |
| A20R82 | 0698-6624 | 5 | 1 | RESISTOR 2K 1% .125W F TC=0+-25 | 28480 | 0698-6624 |
| A20R83 | 0698-8059 | 4 | | RESISTOR 4.32K 1% .125W F TC=0+-25 | 19701 | MF4C1/8-T0-4321-B |
| A20R84 | 0698-3444 | 1 | 1 | RESISTOR 316 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-316R-F |
| A20R85 | 0698-4428 | 3 | 1 | RESISTOR 1.69K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1691-F |
| A20R86* | 0698-3280 | 3 | 1 | RESISTOR 63.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6342-F |
| A20R86* | 0757-0124 | 4 | 1 | RESISTOR 39.2K 1% .125W F TC=0+-100 | 28480 | 0757-0124 |
| A20R86* | 0757-0447 | 4 | 1 | RESISTOR 16.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1622-F |
| A20R86* | 0757-0451 | 0 | 1 | RESISTOR 24.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2432-F |
| A20R91 | 0698-3228 | 9 | 2 | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A20R92 | 0698-3228 | 9 | | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A20R93 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A20R94 | 0698-4499 | 8 | | RESISTOR 54.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5492-F |
| A20R95 | 2100-3253 | 7 | | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A20U1 | 1826-0217 | 4 | 2 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U2 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L565 | CA307T |
| A20U3 | 1826-0417 | 6 | 2 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF13333D |
| A20U4 | 1826-0417 | 6 | | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF13333D |
| A20U6 | 1826-0222 | 1 | 1 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A20U7 | 1826-0217 | 4 | | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A20U9 | 1826-0476 | 7 | 1 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A20U10 | 1826-0715 | 7 | 1 | IC OP AMP LOW-NOISE 8-DIP-P PKG | 18324 | NE5834AN |
| A20U11 | 1826-0081 | 0 | 1 | IC OP AMP WB TO-99 PKG | 27014 | LM318H |
| A20Y1** | 0410-0765 | 5 | 4 | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y2 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y3 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |
| A20Y4 | 0410-0765 | 5 | | CRYSTAL-QUARTZ PAIR; 15613 HZ & 15637 | 28480 | 0410-0765 |

**WHEN -HP- PART NUMBER 0410-0765 IS ORDERED, A MATCHED SET OF 2 CRYSTALS WILL BE SENT: 1 EACH 15.613KHZ AND 1 EACH 15.637KHZ.

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A21 | 03586-66521 | 7 | 1 | IF GAIN & DETECTION (3586A/B/C) | 28480 | 03586-66521 |
| A21C1* | 0140-0193 | 0 | 2 | CAPACITOR-FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300WV1CR |
| A21C1* | 0140-0194 | 1 | 1 | CAPACITOR-FXD 110PF +-5% 300VDC MICA | 72136 | DM15F111J0300WV1CR |
| A21C1* | 0140-0195 | 2 | 2 | CAPACITOR-FXD 130PF +-5% 300VDC MICA | 72136 | DM15F131J0300WV1CR |
| A21C1* | 0140-0196 | 3 | 2 | CAPACITOR-FXD 150PF +-5% 300VDC MICA | 72136 | DM15F151J0300WV1CR |
| A21C1* | 0160-2204 | 0 | 2 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A21C1* | 0160-2205 | 1 | 2 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A21C2 | 0140-0200 | 8 | 1 | CAPACITOR-FXD 680PF +-5% 300VDC MICA | 72136 | DM15F681J0300WV1CR |
| A21C3 | 0160-2055 | 7 | 18 | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C4 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C5 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C6 | 0160-2306 | 3 | | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A21C7 | 0140-0191 | 8 | 3 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E560J0300WV1CR |
| A21C8 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C9 | 0160-2055 | 7 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C10 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C11 | 0160-2306 | 3 | | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A21C12 | 0140-0191 | 8 | | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E560J0300WV1CR |
| A21C13 | 0160-4571 | 0 | 3 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A21C18 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A21C19 | 0160-2055 | 7 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C20 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C21 | 0160-2306 | 3 | | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A21C22 | 0140-0191 | 8 | | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E560J0300WV1CR |
| A21C23 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A21C24 | 0160-3847 | 7 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A21C25 | 0160-2204 | 0 | | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A21C26 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C27 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C28 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C29 | 0160-3658 | 0 | 1 | CAPACITOR-FXD 10UF +-10% 50VDC MET-POLYCE | 28480 | 0160-3658 |
| A21C30 | 0160-0174 | 9 | 1 | CAPACITOR-FXD .47UF +80-20% 25VDC CER | 28480 | 0160-0174 |
| A21C31 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C32 | 0160-0153 | 4 | 3 | CAPACITOR-FXD 1000PF +-10% 200VDC POLYCE | 28480 | 0160-0153 |
| A21C33 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C34 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C35 | 0180-0374 | 3 | 3 | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D106X9020B2 |
| A21C36 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D106X9020B2 |
| A21C37 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D106X9020B2 |
| A21C38 | 0160-0153 | 4 | | CAPACITOR-FXD 1000PF +-10% 200VDC POLYCE | 28480 | 0160-0153 |
| A21C39 | 0180-0100 | 3 | 3 | CAPACITOR-FXD 4.7UF+-10% 35VDC TA | 56289 | 150D475X9035B2 |
| A21C40 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C41 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C42 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A21C43 | 0140-0222 | 6 | 2 | CAPACITOR-FXD 240PF +-1% 300VDC MICA | 72136 | DM15F241F0300WV1CR |
| A21C44 | 0160-2387 | 0 | 2 | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A21C45 | 0160-3548 | 7 | 1 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A21C46 | 0140-0222 | 6 | | CAPACITOR-FXD 240PF +-1% 300VDC MICA | 72136 | DM15F241F0300WV1CR |
| A21C47 | 0160-2387 | 0 | | CAPACITOR-FXD 1000PF +-1% 500VDC MICA | 28480 | 0160-2387 |
| A21C48 | 0150-0012 | 3 | 1 | CAPACITOR-FXD .01UF +-20% 1KVDC CER | 56289 | C023A102J103MS38 |
| A21C49 | 0160-0128 | 3 | 1 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A21C51 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A21C52 | 0180-0100 | 3 | | CAPACITOR-FXD 4.7UF+-10% 35VDC TA | 56289 | 150D475X9035B2 |
| A21C53 | 0180-0100 | 3 | | CAPACITOR-FXD 4.7UF+-10% 35VDC TA | 56289 | 150D475X9035B2 |
| A21C60* | 0140-0195 | 2 | | CAPACITOR-FXD 130PF +-5% 300VDC MICA | 72136 | DM15F131J0300WV1CR |
| A21C60* | 0140-0196 | 3 | | CAPACITOR-FXD 150PF +-5% 300VDC MICA | 72136 | DM15F151J0300WV1CR |
| A21C60* | 0140-0197 | 4 | 1 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A21C60* | 0140-0198 | 5 | 1 | CAPACITOR-FXD 200PF +-5% 300VDC MICA | 72136 | DM15F201J0300WV1CR |
| A21C60* | 0160-2205 | 1 | | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A21C60* | 0160-2206 | 2 | 1 | CAPACITOR-FXD 160PF +-5% 300VDC MICA | 28480 | 0160-2206 |
| A21C61* | 0140-0192 | 9 | 1 | CAPACITOR-FXD 60PF +-5% 300VDC MICA | 72136 | DM15E600J0300WV1CR |
| A21C61* | 0140-0193 | 0 | | CAPACITOR-FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300WV1CR |
| A21C61* | 0160-2306 | 3 | 4 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A21C61* | 0160-2307 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A21C70 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C71 | 0160-0153 | 4 | | CAPACITOR-FXD 1000PF +-10% 200VDC POLYCE | 28480 | 0160-0153 |
| A21C72 | 0180-0309 | 4 | 2 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A21C73 | 0180-0309 | 4 | | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A21C74 | 0180-0061 | 5 | 1 | CAPACITOR-FXD 100UF+75-10% 16VDC AL | 56289 | 30D107G016DC2 |
| A21C75 | 0180-0466 | 4 | 1 | CAPACITOR-FXD 2200UF+100-10% 16VDC AL | 28480 | 0180-0466 |
| A21C80 | 0160-2055 | 9 | | CAPACITOR-FXD .01UF +80-20% 100VDC CER | 28480 | 0160-2055 |
| A21C90 | 0160-4532 | 1 | 1 | CAPACITOR-FXD 1000PF +-20% 50VDC CER | 28480 | 0160-4532 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|-------------------|
| A21CR1 | 1901-0040 | 1 | 6 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR2 | 1901-0033 | 2 | 2 | DIODE-GEN PRP 180V 200MA DO-7 | 28480 | 1901-0033 |
| A21CR3 | 1901-0033 | 2 | 2 | DIODE-GEN PRP 180V 200MA DO-7 | 28480 | 1901-0033 |
| A21CR4 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR5 | 1902-0048 | 1 | 1 | DIODE-ZNR 6.81V 5Z DO-35 PD=.4W | 28480 | 1902-0048 |
| A21CR6 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR7 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR8 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR9 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A21CR10 | 1902-0945 | 7 | 1 | DIODE-ZNR 3V 5Z DO-35 PD=.4W TC=-.043% | 28480 | 1902-0945 |
| A21E1 | 1990-0702 | 9 | 1 | OPTO-ISOLATOR LED-PCNDCT IF=40MA-MAX | 18178 | VTL5C3/2 |
| A21L1 | 9100-0539 | 3 | 1 | INDUCTOR (MISC ITEM) | 28480 | 9100-0539 |
| A21Q2 | 1854-0071 | 7 | 3 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A21Q3 | 1854-0071 | 7 | 3 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A21Q4 | 1854-0071 | 7 | 3 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A21R1 | 0683-1035 | 1 | 4 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A21R2 | 0683-1025 | 9 | 7 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R3 | 0757-0435 | 0 | 1 | RESISTOR 3.92K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3921-F |
| A21R4 | 0683-1045 | 3 | 5 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A21R5 | 0683-4735 | 4 | 1 | RESISTOR 47K 5% .25W FC TC=-400/+800 | 01121 | CB4735 |
| A21R6 | 0698-6624 | 5 | 1 | RESISTOR 2K .1% .125W F TC=0+-25 | 28480 | 0698-6624 |
| A21R7 | 0699-0369 | 5 | 1 | RESISTOR 110.5K .1% .125W F TC=0+-25 | 28480 | 0699-0369 |
| A21R8 | 0698-3279 | 0 | 1 | RESISTOR 4.97K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4991-F |
| A21R9 | 0698-3268 | 7 | 1 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A21R10 | 0698-4494 | 3 | 1 | RESISTOR 35.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3572-F |
| A21R11 | 0698-8344 | 0 | 1 | RESISTOR 604K 1% .125W F TC=0+-100 | 28480 | 0698-8344 |
| A21R13 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R14 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A21R15 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A21R16 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A21R17 | 0757-0442 | 9 | 7 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R18 | 0683-2715 | 6 | 1 | RESISTOR 270 5% .25W FC TC=-400/+600 | 01121 | CB2715 |
| A21R19 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A21R20 | 0811-1780 | 6 | 1 | RESISTOR 1K 5% .25W PWM TC=+3400+-300 | 54294 | VA12-1/4-1001-J |
| A21R21 | 0698-4486 | 3 | 1 | RESISTOR 24.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2492-F |
| A21R22 | 0757-0469 | 0 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |
| A21R23 | 2100-3054 | 6 | 1 | RESISTOR-TRMR 50K 10% C SIDE-ADJ 17-TRN | 02111 | 43P503 |
| A21R24 | 0698-4529 | 5 | 1 | RESISTOR 226K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2263-F |
| A21R25 | 2100-3274 | 2 | 1 | RESISTOR-TRMR 10K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3274 |
| A21R26 | 0698-4506 | 8 | 1 | RESISTOR 73.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7322-F |
| A21R27* | 0698-3518 | 0 | 1 | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A21R27* | 0698-4472 | 7 | 1 | RESISTOR 7.69K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7681-F |
| A21R27* | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |
| A21R28 | 2100-3351 | 6 | 1 | RESISTOR-TRMR 500 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3351 |
| A21R29 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A21R30 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| A21R31 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R32 | 0683-1015 | 7 | 3 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A21R36 | 0683-1005 | 5 | 2 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A21R37 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A21R38 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R39 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R41 | 0698-3558 | 8 | 2 | RESISTOR 4.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4021-F |
| A21R42 | 0757-0437 | 2 | 1 | RESISTOR 4.75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4751-F |
| A21R43 | 0757-0288 | 1 | 1 | RESISTOR 9.09K 1% .125W F TC=0+-100 | 19791 | MF4C1/8-T0-9091-F |
| A21R44 | 2100-3273 | 1 | 1 | RESISTOR-TRMR 2K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3273 |
| A21R45 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R46 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R47 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R48 | 0757-0443 | 0 | 1 | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A21R49 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R50 | 0757-0442 | 9 | 1 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A21R51 | 0698-3280 | 3 | 4 | RESISTOR 63.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6342-F |
| A21R52 | 0698-3280 | 3 | 1 | RESISTOR 63.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6342-F |
| A21R54 | 0698-3280 | 3 | 1 | RESISTOR 63.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6342-F |
| A21R55 | 0698-3280 | 3 | 1 | RESISTOR 63.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6342-F |
| A21R56 | 0683-1045 | 0 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A21R57 | 0683-4715 | 3 | 1 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A21R58 | 0683-3025 | 3 | 1 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CB3025 |
| A21R59 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A21R60 | 0698-3558 | 8 | 1 | RESISTOR 4.02K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4021-F |
| A21R61 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A21R62 | 0698-4452 | 3 | 1 | RESISTOR 374 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-374R-F |
| A21R63 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A21R68 | 0683-2435 | 7 | 1 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A21R69 | 0683-2035 | 3 | 1 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A21R70 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A21R71 | 0683-1525 | 4 | 1 | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A21R72 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A21R73 | 0683-5135 | 0 | 1 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CB5135 |
| A21R74 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A21R75 | 0683-1025 | 7 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R76 | 0683-1015 | 9 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A21R78 | 0811-3070 | 1 | 1 | RESISTOR 2.2 5% .5W PW TC=0+/-150 | 28480 | 0811-3070 |
| A21R80 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A21R81 | 0757-0274 | 5 | 1 | RESISTOR 1.21K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1211-F |
| A21R82 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1002-F |
| A21R83 | 0757-0466 | 7 | 2 | RESISTOR 110K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1103-F |
| A21R84 | 0698-6360 | 6 | 4 | RESISTOR 10K .1% .125W F TC=0+/-25 | 28480 | 0698-6360 |
| A21R85 | 0698-6360 | 6 | | RESISTOR 10K .1% .125W F TC=0+/-25 | 28480 | 0698-6360 |
| A21R86 | 0698-6360 | 6 | | RESISTOR 10K .1% .125W F TC=0+/-25 | 28480 | 0698-6360 |
| A21R87 | 0698-6360 | 6 | | RESISTOR 10K .1% .125W F TC=0+/-25 | 28480 | 0698-6360 |
| A21R88 | 0757-0411 | 2 | 1 | RESISTOR 332 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-332R-F |
| A21R89 | 0757-0459 | 9 | 1 | RESISTOR 22.1K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-2212-F |
| A21R90 | 0698-7332 | 4 | 1 | RESISTOR 1M 1% .125W F TC=0+/-100 | 28480 | 0698-7332 |
| A21R91 | 0757-0433 | 8 | 1 | RESISTOR 3.30K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-3321-F |
| A21R92 | 0683-1635 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1635 |
| A21R93 | 0683-7535 | 8 | 1 | RESISTOR 75K 5% .25W FC TC=-400/+800 | 01121 | CB7535 |
| A21R94 | 0698-3382 | 6 | 1 | RESISTOR 5.49K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-5491-F |
| A21R95 | 0698-3497 | 4 | 1 | RESISTOR 6.04K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-604R-F |
| A21R96 | 2100-3352 | 7 | 1 | RESISTOR-TRMR 1K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3352 |
| A21R97 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A21R98 | 0757-0466 | 7 | | RESISTOR 110K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1103-F |
| A21R99 | 0698-4820 | 1 | 1 | RESISTOR 9.52K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-9531-F |
| A21S1 | 3101-1341 | 3 | 2 | SWITCH-SL SPDT SUBMIN .5A 125VAC/DC | 28480 | 3101-1341 |
| A21S2 | 3101-1341 | 3 | | SWITCH-SL SPDT SUBMIN .5A 125VAC/DC | 28480 | 3101-1341 |
| A21U1 | 1820-1433 | 6 | 2 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A21U2 | 1820-1730 | 6 | 2 | IC FF TTL LS D-TYPE POS-EDGE TRIG CCM | 01295 | SN74LS273N |
| A21U3 | 5061-0795 | 5 | 1 | RESISTOR NETWORK | 28480 | 5061-0795 |
| A21U4 | 1826-0501 | 5 | 1 | IC SWITCH ANLG 16-DIP-C PKG | 27014 | LF135080 |
| A21U5 | 1826-0421 | 2 | 1 | IC CONV RMS/DC 14-DIP-C PKG | 24355 | AD536AJ |
| A21U5 | 1200-0638 | 7 | 1 | SOCKET-IC 14-CONT DIP-DIP-SLDR | 28480 | 1200-0638 |
| A21U6 | 1826-0417 | 6 | 1 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF133330 |
| A21U7 | 1826-0109 | 3 | 3 | IC OP AMP WB TO-99 PKG | 34371 | HA2-2625-B0593 |
| A21U8 | 1826-0109 | 3 | | IC OP AMP WB TO-99 PKG | 34371 | HA2-2625-B0593 |
| A21U9 | 1826-0109 | 3 | | IC OP AMP WB TO-99 PKG | 34371 | HA2-2625-B0593 |
| A21U10 | 1826-0013 | 8 | 1 | IC OP AMP LOW-NOISE TO-99 PKG | 06665 | SS8741CJ |
| A21U11 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A21U13 | 1820-0427 | 6 | 1 | IC MODULATOR TO-100 PKG | 04713 | MC1496C |
| A21U16 | 1826-0348 | 2 | 1 | IC AUDIO AMPL DUAL 14-DIP-P PKG | 27014 | LM377N |
| A21U17 | 1826-0111 | 7 | 1 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1450T |
| A21U18 | 1826-0476 | 7 | 1 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A21U19 | 1826-0021 | 8 | 1 | IC OP AMP GP TO-99 PKG | 27014 | LM310H |
| A21U20 | 1826-0557 | 5 | 1 | IC OP AMP GP QUAD 14-DIP-C PKG | 27014 | LM340J |
| A21U21 | 1820-1433 | 6 | | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A21U22 | 1820-1730 | 6 | | IC FF TTL LS D-TYPE POS-EDGE-TRIG CCM | 01295 | SN74LS273N |
| A21U23 | 1820-1934 | 2 | 1 | IC CONV B R-D/A 16-DIP-C PKG | 06665 | DA0-08EQ |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A22 | 03586-66522 | 8 | 1 | ANALOG/DIGITAL CONVERTER-3100HZ (3586A/B/C) | 28480 | 03586-66522 |
| A22C1 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .010UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A22C2 | 0180-0210 | 6 | 1 | CAPACITOR-FXD 3.30UF +-20% 15VDC TA | 56289 | 150D335X0015A2 |
| A22C3 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .010UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A22C4 | 0160-4812 | 0 | 1 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-4812 |
| A22C5 | 0170-0040 | 9 | 1 | CAPACITOR-FXD .047UF +-10% 200VDC POLYE | 56289 | 292P47392 |
| A22C7 | 0160-3405 | 5 | 1 | CAPACITOR-FXD 2UF +-10% 50VDC MET-POLYC | 28480 | 0160-3405 |
| A22C8 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C9 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C10 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 220PF +-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C11 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 220PF +-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C12 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 220PF +-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C13 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C14 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C15 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C16 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C17 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C18 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C19 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C20 | 0160-5349 | 0 | 2 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C21 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C22 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C23 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C24 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C101 | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-0196 |
| A22C101 | 0160-4813 | 1 | 1 | CAPACITOR-FXD 180PF +-5% 100VDC CER | 28480 | 0160-4813 |
| A22C102 | 0160-4801 | 7 | 1 | CAPACITOR-FXD 100PF +-5% 100VDC CER | 28480 | 0160-4801 |
| A22C103 | 0140-0194 | 1 | 1 | CAPACITOR-FXD 113PF +-5% 300VDC MICA | 72136 | DM15F111J0300WV1CR |
| A22C104 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 750PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A22C105 | 0160-5349 | 0 | 2 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C106 | 0140-0199 | 6 | 1 | CAPACITOR-FXD 240PF +-5% 300VDC MICA | 72136 | DM15F241J0300WV1CR |
| A22C107 | 0160-4822 | 2 | 2 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C108 | 0160-4822 | 2 | 2 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C109 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C110 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C111 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C113 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 330UF +-10% 16VDC TA | 56289 | 150D336X9010R2 |
| A22CR1 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR2 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR4 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N825 6.2V 5% DO-7 PD=.4W | 04713 | 1N825 |
| A22CR5 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR6 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22L1 | 9100-0541 | 7 | 3 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L2 | 9100-0541 | 7 | 3 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L3 | 9100-0541 | 7 | 3 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L101 | 9140-0137 | 1 | 1 | INDUCTOR RF-CH-MLD 10H 5% .2DX.45LG Q=60 | 28480 | 9140-0137 |
| A22L102 | 9100-1637 | 4 | 1 | INDUCTOR RF-CH-MLD 120UH 5% .166DX.385LG | 28480 | 9100-1637 |
| A22L103 | 9100-1634 | 1 | 1 | INDUCTOR RF-CH-MLD 75UH 5% .166DX.385LG | 28480 | 9100-1634 |
| A22Q1 | 1853-0089 | 5 | 1 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A22Q101 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=300MHZ | 28480 | 1854-0071 |
| A22Q102 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q103 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q104 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q105 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22R1 | 0683-2225 | 3 | 1 | RESISTOR 2.2K 5% .25W FC TC=-400/+700 | 01121 | CR2225 |
| A22R2 | 0683-2245 | 7 | 2 | RESISTOR 220K 5% .25W FC TC=-800/+900 | 01121 | CR2245 |
| A22R3 | 0683-2235 | 5 | 3 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R4 | 0683-2245 | 7 | 2 | RESISTOR 220K 5% .25W FC TC=-800/+900 | 01121 | CR2245 |
| A22R5 | 0683-1835 | 9 | 1 | RESISTOR 18K 5% .25W FC TC=-400/+800 | 01121 | CR1835 |
| A22R6 | 2100-3356 | 1 | 1 | RESISTOR-TRMR 200K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3356 |
| A22R7 | 0683-7535 | 8 | 1 | RESISTOR 75K 5% .25W FC TC=-400/+800 | 01121 | CR7535 |
| A22R8 | 0683-1035 | 1 | 5 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A22R9 | 0683-1035 | 1 | 5 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A22R10 | 0683-2235 | 5 | 3 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R11 | 0683-6835 | 9 | 1 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CR6835 |
| A22R12 | 0683-2235 | 5 | 3 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R13 | 0683-3335 | 8 | 1 | RESISTOR 33K 5% .25W FC TC=-400/+800 | 01121 | CR3335 |
| A22R14 | 0683-1935 | 1 | 1 | RESISTOR 19K 5% .25W FC TC=-400/+700 | 01121 | CR1935 |
| A22R15 | 1810-0231 | 9 | 1 | NETWORK-RES 8-SIP2.2K OHM X 7 | 01121 | 28FA022 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A22R16 | 1810-0204 | 4 | 1 | NETWORK-RES 8-SIP1.0K OHM X 7 | 01121 | 208A102 |
| A22R17 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R18 | 0683-5125 | 8 | 2 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R19 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R20 | 0698-6846 | 3 | 1 | RESISTOR 5.42K .5% .125W F TC=0+-50 | 24546 | NC55-1/8-T2-5421-D |
| A22R21 | 2100-3095 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 17-TRN | 02111 | 43P201 |
| A22R22 | 0698-5552 | 6 | 1 | RESISTOR 1K 1% .125W F TC=0+-25 | 28480 | 0698-5552 |
| A22R23 | 0698-3152 | 8 | 1 | RESISTOR 3.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3491-F |
| A22R24 | 0757-0427 | 0 | 1 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A22R25 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R26 | 0757-0420 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A22R27 | 0757-0442 | 9 | 3 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R28 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R29 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R30 | 0757-0445 | 0 | 2 | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R31 | 0757-0445 | 2 | | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R32 | 0698-3557 | 7 | 1 | RESISTOR 806 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-806R-F |
| A22R33 | 0757-0438 | 3 | 5 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R34 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R35 | 0757-0433 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A22R36 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R38 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R39 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R40 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A22R101 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A22R102 | 0683-2035 | 3 | 3 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R103 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R104 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R105 | 0698-3450 | 9 | 4 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R106 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R107 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R108 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R109 | 0757-0161 | 9 | 4 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R110 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R111 | 0698-3493 | 0 | 2 | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R112 | 0698-3493 | 0 | | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R113 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R114 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R115 | 0698-4484 | 1 | 2 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R116 | 0698-4484 | 1 | | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R117 | 0698-4123 | 5 | 2 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R118 | 0698-4123 | 5 | | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R119 | 0757-0277 | 8 | 2 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22R120 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22U1 | 1820-1443 | 4 | 1 | IC SN74LS164N TTL LS R/S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A22U2 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A22U3 | 1826-9581 | 5 | 2 | IC SWITCH ANLG 16-DIP-C PKG | 27014 | LF13508D |
| A22U4 | 1826-0222 | 1 | 2 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U5 | 1826-0642 | 9 | 1 | IC CONV 3-1/2-DIG-A/D 16-DIP-C PKG | 04713 | MC1405L |
| A22U6 | 1820-2310 | 0 | 1 | IC CNTR PHOS D/CD UP/DOWN SYNCHRD | 50688 | MK50399N |
| A22U7 | 1826-0581 | 5 | | IC SWITCH ANLG 16-DIP-C PKG | 27014 | LF13508D |
| A22U8 | 1820-0668 | 7 | 1 | IC BUF TTL NON-INV HEX 1-IMP | 01295 | SN7407N |
| A22U9 | 1820-1416 | 5 | 1 | IC SCHMITT-TRIG TTL LS INV HEX 1-IMP | 01295 | SN74LS14N |
| A22U10 | 1820-1197 | 9 | 3 | IC GATE TTL LS NAND QUAD 2-IMP | 01295 | SN74LS00N |
| A22U11 | 1820-1197 | 9 | | IC GATE TTL LS NAND QUAD 2-IMP | 01295 | SN74LS00N |
| A22U12 | 1820-1201 | 6 | 1 | IC GATE TTL LS AND QUAD 2-IMP | 01295 | SN74LS08N |
| A22U13 | 1820-1197 | 9 | | IC GATE TTL LS NAND QUAD 2-IMP | 01295 | SN74LS00N |
| A22U14 | 1820-1991 | 1 | 4 | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U15 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U16 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U17 | 1826-0138 | 8 | 1 | IC COMPARATOR GP QUAD 14-DIP-P PKG | 01295 | LM339N |
| A22U18 | 1820-1446 | 5 | 1 | IC LCH TTL LS QUAD | 01295 | SN74LS279N |
| A22U19 | 1820-1122 | 0 | 1 | IC CNTR CMOS ECD SYNCHRD DUAL | 04713 | MC145180CP |
| A22U20 | 1820-1188 | 8 | 1 | IC PL LOOP 16-DIP-P PKG | 3LS85 | CD4046AF |
| A22U21 | 1826-0222 | 1 | | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U22 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS273N |
| A22U101 | 1820-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-IMP | 01295 | SN74LS10N |
| A22U102 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22Y101 | 0410-1209 | 4 | 1 | CRYSTAL-QUARTZ 1.37750 KHZ | 28480 | 0410-1209 |
| A22Y102 | 0410-1214 | 1 | 1 | CRYSTAL-QUARTZ 1.74250 KHZ | 28480 | 0410-1214 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A22 | 03586-66525 | 1 | 1 | ANALOG/DIGITAL CONVERTER-2000HZ (3586B) | 28480 | 03586-66525 |
| A22C1 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 0160-3847 |
| A22C2 | 0180-0210 | 6 | 1 | CAPACITOR-FXD 3.30UF+-20% 15VDC TA | 56289 | 150D335X0015A2 |
| A22C3 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 0160-3847 |
| A22C4 | 0160-4812 | 0 | 1 | CAPACITOR-FXD 220PF +-5% 100VDC CER | 28480 | 0160-4812 |
| A22C5 | 0170-0040 | 9 | 1 | CAPACITOR-FXD .047UF +-10% 200VDC POLYE | 56289 | 222P47392 |
| A22C7 | 0160-3405 | 5 | 1 | CAPACITOR-FXD 2UF +-10% 50VDC MET-POLYC | 28480 | 0160-3405 |
| A22C8 | 0160-4571 | 8 | 16 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C9 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C10 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C11 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C12 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C13 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C14 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C15 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C16 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C17 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C18 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C19 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C20 | 0160-5349 | 8 | 2 | CAPACITOR-FXD 220PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C21 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C22 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C23 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C24 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C101 | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-0196 |
| A22C101 | 0160-4813 | 1 | 1 | CAPACITOR-FXD 180PF +-5% 100VDC CER | 28480 | 0160-4813 |
| A22C102 | 0160-4801 | 7 | 1 | CAPACITOR-FXD 100PF +-5% 100VDC CER | 28480 | 0160-4801 |
| A22C103 | 0140-0194 | 1 | 1 | CAPACITOR-FXD 110PF +-5% 300VDC MICA | 72136 | DM15F111J300VW1CR |
| A22C104 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A22C105 | 0160-5349 | 0 | 1 | CAPACITOR-FXD 220PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C106 | 0160-0199 | 6 | 1 | CAPACITOR-FXD 240PF +-5% 300VDC MICA | 72136 | DM15F241J300VW1CR |
| A22C107 | 0160-4822 | 2 | 2 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C108 | 0160-4822 | 2 | 1 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C109 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C110 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C111 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C113 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 16VDC TA | 56289 | 150D336X9010R2 |
| A22CR1 | 1901-0040 | 1 | 5 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR2 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR3 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR4 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N325 6.2V 5% DO-7 PD=.4W | 64713 | 1N325 |
| A22CR5 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR6 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22L1 | 9100-0541 | 7 | 3 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L2 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L3 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L101 | 9140-0137 | 1 | 1 | INDUCTOR RF-CH-MLD 1MH 5% .2DX.45LG Q=60 | 28480 | 9140-0137 |
| A22L102 | 9100-1637 | 4 | 1 | INDUCTOR RF-CH-MLD 120UH 5% .166DX.385LG | 28480 | 9100-1637 |
| A22L103 | 9100-1634 | 1 | 1 | INDUCTOR RF-CH-MLD 75UH 5% .166DX.385LG | 28480 | 9100-1634 |
| A22Q1 | 1853-0089 | 5 | 1 | TRANSISTOR PNP 2N4217 SI PD=200MW | 04713 | 2N4217 |
| A22Q101 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A22Q102 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q103 | 1854-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q104 | 1854-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q105 | 1854-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22R1 | 0683-2225 | 3 | 1 | RESISTOR 2.2K 5% .25W FC TC=-400/+700 | 01121 | CB2225 |
| A22R2 | 0683-2245 | 7 | 2 | RESISTOR 220K 5% .25W FC TC=-800/+900 | 01121 | CB2245 |
| A22R3 | 0683-2235 | 5 | 3 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CB2235 |
| A22R4 | 0683-2245 | 7 | 3 | RESISTOR 220K 5% .25W FC TC=-800/+900 | 01121 | CB2245 |
| A22R5 | 0683-1835 | 9 | 1 | RESISTOR 18K 5% .25W FC TC=-400/+800 | 01121 | CB1835 |
| A22R6 | 2100-3356 | 1 | 1 | RESISTOR-TRMR 200K 10% C STDF-ADJ 1-TRN | 28480 | 2100-3356 |
| A22R7 | 0683-7535 | 8 | 1 | RESISTOR 75K 5% .25W FC TC=-400/+800 | 01121 | CB7535 |
| A22R8 | 0683-1035 | 1 | 5 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R9 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R10 | 0683-2235 | 5 | 1 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CB2235 |
| A22R11 | 0683-6835 | 9 | 1 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A22R12 | 0683-2235 | 5 | 1 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CB2235 |
| A22R13 | 0683-3335 | 8 | 1 | RESISTOR 33K 5% .25W FC TC=-400/+800 | 01121 | CB3335 |
| A22R14 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R15 | 1810-0231 | 9 | 1 | NETWORK-RES 8-S1P2.2K OHM X 7 | 01121 | 208A222 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A22R16 | 1810-0204 | 6 | 1 | NETWORK-RES 8-SIP1.0K OHM X 7 | 01121 | 208A102 |
| A22R17 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R18 | 0683-5125 | 8 | 2 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R19 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R20 | 0698-6846 | 3 | 1 | RESISTOR 5.42K .5% .125W F TC=0+-50 | 24546 | NC55-1/8-T2-5421-D |
| A22R21 | 2180-3095 | 5 | 1 | RESISTOR-TRMR 200 10% C STDC-ADJ 17-TRN | 02111 | 43P201 |
| A22R22 | 0698-5552 | 4 | 1 | RESISTOR 1K 1% .125W F TC=0+-25 | 28480 | 0698-5552 |
| A22R23 | 0698-3152 | 8 | 1 | RESISTOR 3.48K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3481-F |
| A22R24 | 0757-0427 | 0 | 1 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A22R25 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R26 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A22R27 | 0757-0442 | 9 | 3 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R28 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R29 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R30 | 0757-0445 | 2 | 2 | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R31 | 0757-0445 | 2 | | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R32 | 0698-3557 | 7 | 1 | RESISTOR 806 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-806R-F |
| A22R33 | 0757-0438 | 3 | 5 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R34 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R35 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A22R36 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R38 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R39 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R40 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A22R101 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A22R102 | 0683-2035 | 3 | 3 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R103 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R104 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R105 | 0698-3450 | 9 | 4 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R106 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R107 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R108 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R109 | 0757-0161 | 9 | 4 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R110 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R111 | 0698-3493 | 0 | 2 | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R112 | 0698-3493 | 0 | | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R113 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R114 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R115 | 0698-4484 | 1 | 2 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R116 | 0698-4484 | 1 | | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R117 | 0698-4123 | 5 | 2 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R118 | 0698-4123 | 5 | | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R119 | 0757-0277 | 8 | 2 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22R120 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22U1 | 1820-1433 | 6 | 1 | IC SHF RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A22U2 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A22U3 | 1826-0501 | 5 | 2 | IC SWITCH ANLG 16-DIP-C PKG | 27014 | LF13500D |
| A22U4 | 1826-0222 | 1 | 2 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U5 | 1826-0642 | 9 | 1 | IC CONV 3-1/2 DIG-A/D 16-DIP-C PKG | 04713 | MC1405L |
| A22U6 | 1820-2310 | 0 | 1 | IC CNTR PHOS DECD UP/DOWN SYNCHRD | 50689 | MC50399N |
| A22U7 | 1826-0501 | 5 | | IC SWITCH ANLG 16-DIP-C PKG | 27014 | LF13500D |
| A22U8 | 1820-0668 | 7 | 1 | IC RFR TTL NON-INV HEX 1-INP | 01295 | SN7407N |
| A22U9 | 1820-1416 | 5 | 1 | IC SCHMITT-TRIG TTL LS INV HEX 1-INP | 01295 | SN74LS14N |
| A22U10 | 1820-1197 | 9 | 3 | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A22U11 | 1820-1197 | 9 | | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A22U12 | 1820-1201 | 6 | 1 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A22U13 | 1820-1197 | 9 | | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A22U14 | 1820-1991 | 1 | 4 | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U15 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U16 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U17 | 1826-0138 | 8 | 1 | IC COMPARATOR GP QUAD 14-DIP-P PKG | 01295 | LM339N |
| A22U18 | 1820-1440 | 5 | 1 | IC LCH TTL LS QUAD | 01295 | SN74LS279N |
| A22U19 | 1820-1122 | 0 | 1 | IC CNTR CMGS BCD SYNCHRD DUAL | 04713 | MC14518ECP |
| A22U20 | 1820-1188 | 8 | 1 | IC PL LOOP 16-DIP-P PKG | 3L585 | CD4046AF |
| A22U21 | 1826-0222 | 1 | | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U22 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| A22U101 | 1820-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-INP | 01295 | SN74LS18N |
| A22U102 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22Y101 | 0410-1210 | 7 | 1 | CRYSTAL-QUARTZ 1.41250 MHZ | 28480 | 0410-1210 |
| A22Y102 | 0410-1215 | 2 | 1 | CRYSTAL-QUARTZ 1.71250 MHZ | 28480 | 0410-1215 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A22 | 03506-66526 | 2 | 1 | ANALOG/DIGITAL CONVERTER-1740HZ (3506A/B) | 28480 | 03506-66526 |
| A22C1 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A22C2 | 0180-0210 | 6 | 1 | CAPACITOR-FXD 3.3UF+-20% 15VDC TA | 56289 | 150D335X0015A2 |
| A22C3 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A22C4 | 0160-3454 | 4 | 1 | CAPACITOR-FXD 220PF +-10% 1KVDC CER | 28480 | 0160-3454 |
| A22C5 | 0170-0040 | 9 | 1 | CAPACITOR-FXD .047UF +-10% 200VDC POLY | 56289 | 292P47392 |
| A22C7 | 0160-3405 | 5 | 1 | CAPACITOR-FXD 2UF +-10% 50VDC MET-POLY | 28480 | 0160-3405 |
| A22C8 | 0160-4571 | 8 | 15 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C9 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C10 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C11 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C12 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A22C13 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C14 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C15 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C16 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C17 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C18 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C19 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C20 | 0160-5349 | 0 | 3 | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C21 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C22 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C23 | 0160-5349 | 0 | | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C24 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C101 | 0160-0196 | 5 | 1 | CAPACITOR-FXD 24PF +-5% 300VDC MICA | 28480 | 0160-0196 |
| A22C101 | 0160-4813 | 1 | 1 | CAPACITOR-FXD 180PF +-5% 100VDC CER | 28480 | 0160-4813 |
| A22C102 | 0160-4801 | 7 | 1 | CAPACITOR-FXD 180PF +-5% 100VDC CER | 28480 | 0160-4801 |
| A22C103 | 0140-0194 | 1 | 1 | CAPACITOR-FXD 110PF +-5% 300VDC MICA | 72136 | DM15F111J0300WV1CR |
| A22C104 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A22C105 | 0160-5349 | 0 | | CAPACITOR-FXD 200PF +-5% 100VDC CER | 28480 | 0160-5349 |
| A22C106 | 0140-0199 | 6 | 1 | CAPACITOR-FXD 240PF +-5% 300VDC MICA | 72136 | DM15F241J0300WV1CR |
| A22C107 | 0160-4822 | 2 | 2 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C108 | 0160-4822 | 2 | | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A22C109 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C110 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C111 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A22C113 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X9010B2 |
| A22CR1 | 1901-0040 | 1 | 5 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR2 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR3 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR4 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N825 6.2V 5% DO-7 PD=.4W | 04713 | 1N825 |
| A22CR5 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22CR6 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A22L1 | 9100-0541 | 7 | 3 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L2 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L3 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A22L101 | 9140-0137 | 1 | 1 | INDUCTOR RF-CH-MLD 1MH 5% .2DX.45LG Q=60 | 28480 | 9140-0137 |
| A22L102 | 9100-1637 | 4 | 1 | INDUCTOR RF-CH-MLD 120UH 5% .166DX.385LG | 28480 | 9100-1637 |
| A22L103 | 9100-1634 | 1 | 1 | INDUCTOR RF-CH-MLD 75UH 5% .166DX.385LG | 28480 | 9100-1634 |
| A22Q1 | 1853-0069 | 5 | 1 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A22Q101 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A22Q102 | 1854-0215 | 1 | 4 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q103 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q104 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22Q105 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A22R1 | 0683-2225 | 3 | 1 | RESISTOR 2.2K 5% .25W FC TC=-400/+700 | 01121 | CR2225 |
| A22R2 | 0683-2245 | 7 | 2 | RESISTOR 220K 5% .25W FC TC=-800/+800 | 01121 | CR2245 |
| A22R3 | 0683-2235 | 5 | 3 | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R4 | 0683-2245 | 7 | | RESISTOR 220K 5% .25W FC TC=-800/+800 | 01121 | CR2245 |
| A22R5 | 0683-1835 | 9 | 1 | RESISTOR 18K 5% .25W FC TC=-400/+800 | 01121 | CR1835 |
| A22R6 | 2100-3356 | 1 | 1 | RESISTOR-TRMR 200K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3356 |
| A22R7 | 0683-2535 | 8 | 1 | RESISTOR 75K 5% .25W FC TC=-400/+800 | 01121 | CR7535 |
| A22R8 | 0683-1035 | 1 | 5 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A22R9 | 0683-1935 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A22R10 | 0683-2235 | 5 | | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R11 | 0683-6835 | 9 | 1 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CR6835 |
| A22R12 | 0683-2235 | 5 | | RESISTOR 22K 5% .25W FC TC=-400/+800 | 01121 | CR2235 |
| A22R13 | 0683-3335 | 8 | 1 | RESISTOR 33K 5% .25W FC TC=-400/+800 | 01121 | CR3335 |
| A22R14 | 0683-1635 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A22R15 | 1010-0329 | 6 | 1 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A22R16 | 1810-0204 | 6 | 1 | NETWORK-RES 8-SIP1.0K OHM X 7 | 01121 | 208A102 |
| A22R17 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R18 | 0683-5125 | 8 | 2 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R19 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A22R20 | 0698-6044 | 3 | 1 | RESISTOR 5.42K 1% .125W F TC=0+-50 | 24546 | NC55-1/8-T2-5421-D |
| A22R21 | 2100-3695 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 17-TRN | 02111 | 43P201 |
| A22R22 | 0698-5552 | 6 | 1 | RESISTOR 1K 1% .125W F TC=0+-25 | 20480 | 0698-5552 |
| A22R23 | 0698-3152 | 8 | 1 | RESISTOR 3.48K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3481-F |
| A22R24 | 0757-0427 | 0 | 1 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A22R25 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A22R26 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A22R27 | 0757-0442 | 9 | 3 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R28 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R29 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A22R30 | 0757-0445 | 2 | 2 | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R31 | 0757-0445 | 2 | | RESISTOR 13K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1302-F |
| A22R32 | 0698-3557 | 7 | 1 | RESISTOR 806 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-806R-F |
| A22R33 | 0757-0438 | 3 | 6 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R34 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R35 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R36 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R38 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R39 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A22R40 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A22R101 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A22R102 | 0683-2035 | 3 | 3 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R103 | 0603-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R104 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A22R105 | 0698-3450 | 9 | 4 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R106 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R107 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R108 | 0698-3450 | 9 | | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A22R109 | 0757-0161 | 9 | 3 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R110 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R111 | 0698-3493 | 0 | 2 | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R112 | 0698-3493 | 0 | | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A22R113 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A22R114 | 0757-0164 | 2 | 1 | RESISTOR 5.6K 2% .25W F TC=0+-100 | 24546 | C5-1/4-T0-5601-G |
| A22R115 | 0698-4484 | 1 | 2 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R116 | 0698-4484 | 1 | | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A22R117 | 0698-4123 | 5 | 2 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R118 | 0698-4123 | 5 | | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A22R119 | 0757-0277 | 8 | 2 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22R120 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A22U1 | 1820-1433 | 6 | 1 | IC SHF-REGTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A22U2 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A22U3 | 1826-0501 | 5 | 2 | IC SWITCH ANLG 16 DIP-C PKG | 27014 | LF1350BD |
| A22U4 | 1826-0222 | 1 | 2 | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U5 | 1826-0642 | 9 | 1 | IC CONV 3-1/2 DIG-A/D 16-DIP-C PKG | 04713 | MC1405L |
| A22U6 | 1820-2310 | 0 | 1 | IC CNTR PHOS DECD UP/DOWN SYNCHRO | 50089 | MK50399N |
| A22U7 | 1826-0501 | 5 | | IC SWITCH ANLG 16 DIP-C PKG | 27014 | LF1350BD |
| A22U8 | 1820-0668 | 7 | 1 | IC BFR TTL NON-INV HEX 1-INP | 01295 | SN7407N |
| A22U9 | 1820-1416 | 5 | 1 | IC SCHMIT-TRIG TTL LS INV HEX 1-INP | 01295 | SN74LS14N |
| A22U10 | 1820-1197 | 9 | 3 | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A22U11 | 1820-1197 | 9 | | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A22U12 | 1820-1201 | 6 | 1 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A22U13 | 1820-1197 | 9 | | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A22U14 | 1820-1991 | 1 | 4 | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U15 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U16 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22U17 | 1820-1483 | 6 | 1 | IC GATE CMOS OR QUAD 2-INP | 31585 | CD4071BE |
| A22U18 | 1820-1440 | 5 | 1 | IC LCH TTL LS QUAD | 01295 | SN74LS279N |
| A22U19 | 1820-1122 | 0 | 1 | IC CNTR CMOS ECD SYNCHRO DUAL | 04713 | MC14518BCP |
| A22U20 | 1820-1188 | 8 | 1 | IC PL LOOP 16-DIP-P PKG | 31585 | CD4046AF |
| A22U21 | 1826-0222 | 1 | | IC OP AMP GP QUAD 14-DIP-P PKG | 07263 | UA4136PC |
| A22U101 | 1820-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-INP | 01295 | SN74LS10N |
| A22U102 | 1820-1991 | 1 | | IC CNTR TTL LS DECD DUAL 4-BIT | 01295 | SN74LS390N |
| A22Y101 | 0410-1211 | 8 | 1 | CRYSTAL-QUARTZ 1.42750 MHZ | 28480 | 0410-1211 |
| A22Y102 | 0410-1213 | 0 | 1 | CRYSTAL-QUARTZ 1.6975 MHZ | 28480 | 0410-1213 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A30 | 03586-66530 | 8 | 1 | FRACTIONAL N -N (3586A/B/C) | 28480 | 03586-66530 |
| A30C1 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A30C2 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X9010R2 |
| A30C3 | 0160-3879 | 7 | 11 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C5 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C6 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C7 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C8 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C9 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C10 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C11 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C12 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C13 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C14 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A30C15 | 0160-0191 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E56J0300WV1CR |
| A30L2 | 9100-3560 | 6 | 2 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A30L3 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A30Q1 | 1853-0448 | 0 | 1 | TRANSISTOR PNP SI TO-92 PD=625MW | 04713 | MPSH81 |
| A30Q2 | 1854-0019 | 3 | 1 | TRANSISTOR NPN SI TO-18 PD=360MW | 28480 | 1854-0019 |
| A30R1 | 1810-0121 | 6 | 1 | NETWORK-RES 9-SIP1.0K OHM X B | 91637 | CSPC9C07-102J |
| A30R2 | 0699-3492 | 9 | 1 | RESISTOR 2.47K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2671-F |
| A30R3 | 0698-4439 | 6 | 1 | RESISTOR 3.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3241-F |
| A30R4 | 0683-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A30R5 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A30R6 | 0683-2705 | 4 | 1 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A30R7 | 0683-7505 | 2 | 1 | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| A30R8 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A30R9 | 0683-3325 | 6 | 1 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| A30R10 | 0683-5115 | 6 | 1 | RESISTOR 510 5% .25W FC TC=-400/+600 | 01121 | CB5115 |
| A30U1 | 1820-1251 | 6 | 2 | IC CNTR TTL LS DECD ASYNCHRO | 01295 | SN74LS196N |
| A30U2 | 1820-1251 | 6 | | IC CNTR TTL LS DECD ASYNCHRO | 01295 | SN74LS196N |
| A30U3 | 1820-1849 | 2 | 1 | IC CNTR TTL S DECD ASYNCHRO | 01295 | SN74S196N |
| A30U4 | 1820-0686 | 9 | 2 | IC GATE TTL S AND TPL 3-INP | 01295 | SN74S11N |
| A30U5 | 1820-0629 | 0 | 7 | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U6 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U7 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U8 | 1820-0681 | 4 | 2 | IC GATE TTL S NAND QUAD 2-INP | 01295 | SN74S00N |
| A30U9 | 1820-1196 | 8 | 2 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS174N |
| A30U10 | 1820-1196 | 8 | | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS174N |
| A30U11 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U12 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U13 | 1820-0686 | 9 | | IC GATE TTL S AND TPL 3-INP | 01295 | SN74S11N |
| A30U14 | 1820-1144 | 6 | 1 | IC GATE TTL LS NOR QUAD 2-INP | 01295 | SN74LS02N |
| A30U15 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |
| A30U16 | 1820-2004 | 9 | 1 | IC MISC NMOS | 28480 | 1820-2004 |
| A30U17 | 1820-0681 | 4 | | IC GATE TTL S NAND QUAD 2-INP | 01295 | SN74S00N |
| A30U18 | 1820-0629 | 0 | | IC FF TTL S J-K NEG-EDGE-TRIG | 01295 | SN74S112N |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A31 | 03586-66531 | 9 | 1 | FRACTIONAL N VCO (3586A/B/C) | 28480 | 03586-66531 |
| A31C1 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C2 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C3 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 150D336X9010B2 |
| A31C4 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C5 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C7 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C8 | 0160-0576 | 5 | 2 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A31C9 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A31C10 | 0160-0570 | 9 | 3 | CAPACITOR-FXD 220PF +-20% 100VDC CER | 28480 | 5024EM100RD221M |
| A31C11 | 0160-0570 | 9 | | CAPACITOR-FXD 220PF +-20% 100VDC CER | 28480 | 5024EM100RD221M |
| A31C12 | 0160-0570 | 9 | | CAPACITOR-FXD 220PF +-20% 100VDC CER | 28480 | 5024EM100RD221M |
| A31C13 | 0160-3878 | 6 | 1 | CAPACITOR-FXD 1000PF +-20% 100VDC CER | 28480 | 0160-3878 |
| A31C14 | 0160-3879 | 7 | 22 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C15 | 0180-0228 | 6 | | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A31C16 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C17 | 0180-0291 | 3 | 1 | CAPACITOR-FXD 1UF+-10% 35VDC TA | 56289 | 150D105X9035A2 |
| A31C18 | 0160-4389 | 6 | 1 | CAPACITOR-FXD 100PF +-50% 200VDC CER | 28480 | 0160-4389 |
| A31C19 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C20 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C21 | 0180-0197 | 8 | 2 | CAPACITOR-FXD 2.2UF+-10% 20VDC TA | 56289 | 150D225X9020A2 |
| A31C22 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C23 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C24 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C25 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C26 | 0180-0197 | 8 | | CAPACITOR-FXD 2.2UF+-10% 20VDC TA | 56289 | 150D225X9020A2 |
| A31C27 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C28 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C29 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C32 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C33 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C35 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C36 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C37 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C38 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C39 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C40 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C41 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C42 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31C43 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A31CR2 | 1902-3105 | 7 | 1 | DIODE-ZNR 5.62V 2% DO-35 PD=.4W | 28480 | 1902-3105 |
| A31CR3 | 1901-0518 | 8 | 3 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A31CR4 | 0122-0089 | 5 | 3 | DIODE-VVC 25PF 10% C3/C25-MIN=5 BVR=30V | 04713 | MV109 |
| A31CR5 | 0122-0089 | 5 | | DIODE-VVC 25PF 10% C3/C25-MIN=5 BVR=30V | 04713 | MV109 |
| A31CR6 | 0122-0089 | 5 | | DIODE-VVC 25PF 10% C3/C25-MIN=5 BVR=30V | 04713 | MV109 |
| A31CR7 | 1901-0518 | 8 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A31CR8 | 1901-0518 | 8 | | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A31CR9 | 1901-0040 | 1 | 4 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A31CR10 | 1901-0040 | 1 | | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A31CR11 | 1990-0486 | 6 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA MAX BVR=5V | 28480 | 5082-4684 |
| A31CR15 | 1901-0040 | 1 | | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A31CR16 | 1901-0040 | 1 | | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A31J1 | 1250-1512 | 3 | 1 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A31L1 | 9100-3560 | 6 | 6 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31L2 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31L3 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31L4 | 9140-0350 | 9 | 1 | COIL-VAR 504NH 616NH Q=140 PC-MTG | 28480 | 9140-0350 |
| A31L5 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31L6 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31L7 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A31Q1 | 1854-0345 | 8 | 0 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q2 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q3 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q4 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q5 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q6 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q7 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q8 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A31Q9 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|------------------|
| A31R1 | 0698-4421 | 6 | 1 | RESISTOR 249 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-249R-F |
| A31R2 | 0683-1035 | 1 | 8 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R3 | 0757-0441 | 8 | 1 | RESISTOR 8.25K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8251-F |
| A31R4 | 2100-3210 | 6 | 1 | RESISTOR-TRMR 10K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3210 |
| A31R5 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R6 | 0698-3497 | 4 | 1 | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A31R7 | 0683-2025 | 1 | 4 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A31R8 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R9 | 0683-2025 | 1 | - | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A31R10 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R11 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R12 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R13 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A31R14 | 0683-3315 | 4 | 4 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A31R15 | 0757-0273 | 4 | 1 | RESISTOR 3.01K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3011-F |
| A31R16 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R17 | 0757-0405 | 4 | 1 | RESISTOR 162 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-162R-F |
| A31R18 | 0683-3035 | 5 | 3 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A31R19 | 0683-4705 | 8 | 10 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R20 | 0683-3035 | 5 | 1 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A31R21 | 0683-3035 | 5 | 1 | RESISTOR 30K 5% .25W FC TC=-400/+800 | 01121 | CB3035 |
| A31R22 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R23 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A31R24 | 0698-3223 | 4 | 1 | RESISTOR 1.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1241-F |
| A31R25 | 0757-0416 | 7 | 1 | RESISTOR 511 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-511R-F |
| A31R26 | 0683-2705 | 4 | 2 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A31R27 | 0757-0279 | 0 | 1 | RESISTOR 3.16K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3161-F |
| A31R28 | 0698-4443 | 2 | 1 | RESISTOR 4.53K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4531-F |
| A31R29 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A31R30 | 0683-2705 | 4 | 1 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A31R31 | 0683-3315 | 4 | 1 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A31R32 | 0757-0401 | 8 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A31R33 | 0683-4705 | 8 | 3 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R34 | 0757-0280 | 3 | 5 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A31R35 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A31R36 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R37 | 0757-0420 | 3 | 2 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A31R38 | 0698-3443 | 0 | 2 | RESISTOR 287 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-287R-F |
| A31R39 | 0757-0346 | 2 | 1 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R-F |
| A31R40 | 0757-0401 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A31R41 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R42 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A31R43 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A31R44 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R45 | 0757-0420 | 3 | 1 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A31R46 | 0698-3443 | 0 | 1 | RESISTOR 287 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-287R-F |
| A31R47 | 0698-3434 | 9 | 1 | RESISTOR 34.0 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-34R-F |
| A31R48 | 0757-0401 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A31R49 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R50 | 0757-0413 | 4 | 1 | RESISTOR 392 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-392R-F |
| A31R51 | 0757-0280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A31R52 | 0698-4424 | 9 | 1 | RESISTOR 1.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1461-F |
| A31R53 | 1010-0121 | 6 | 1 | NETWORK-RES 7-SIP1.0K OHM X B | 91637 | C109C07-102J |
| A31R56 | 0683-3315 | 4 | 1 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A31R57 | 0683-3315 | 4 | 1 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A31R58 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R61 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R62 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A31R75* | 0698-3262 | 1 | 1 | RESISTOR 40.2 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4022-F |
| A31R75* | 0698-4126 | 8 | 1 | RESISTOR 35.7 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357-F |
| A31R75* | 0698-4380 | 6 | 1 | RESISTOR 45.3 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-453-F |
| A31R75* | 0698-4384 | 0 | 1 | RESISTOR 54.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-549-F |
| A31R75* | 0757-0388 | 2 | 1 | RESISTOR 39.1 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-391-F |
| A31R75* | 0757-0394 | 0 | 1 | RESISTOR 51.1 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-511-F |
| A31U1 | 1026-0111 | 7 | 2 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A31U2 | 1026-0111 | 7 | 2 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A31U3 | 1020-1303 | 5 | 1 | IC CNTR ECL RCD POS-EDGE-TRIG | 04713 | MC10136L |
| A31U4 | 1020-0803 | 2 | 1 | IC GATE ECL OR-NOR TPL | 04713 | MC10105P |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A32 | 03586-66532 | 0 | 1 | FRACTIONAL N PHASE DETECTOR (3586A/B/C) | 28480 | 03586-66532 |
| A32C1 | 0140-0197 | 4 | 2 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A32C2 | 0140-0197 | 4 | 4 | CAPACITOR-FXD 180PF +-5% 300VDC MICA | 72136 | DM15F181J0300WV1CR |
| A32C3 | 0180-0210 | 6 | 4 | CAPACITOR-FXD 3.30UF +-20% 15VDC TA | 56289 | 1500335X0015A2 |
| A32C4 | 0160-4571 | 8 | 3 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-4571 |
| A32C5 | 0160-2257 | 3 | 1 | CAPACITOR-FXD 10PF +-5% 500VDC CER 3+ 60 | 28480 | 0160-2257 |
| A32C6 | 0160-2222 | 2 | 1 | CAPACITOR-FXD 1500PF +-5% 300VDC MICA | 28480 | 0160-2222 |
| A32C7 | 0160-2250 | 6 | 1 | CAPACITOR-FXD 5.1PF +--.25PF 500VDC CER | 28480 | 0160-2250 |
| A32C8 | 0160-0576 | 5 | 4 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A32C9 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A32C10 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A32C11 | 0160-2940 | 1 | 1 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A32C12 | 0160-2234 | 8 | 1 | CAPACITOR-FXD 1PT +--.25PF 500VDC CER | 28480 | 0160-2234 |
| A32C13 | 0160-4461 | 5 | 1 | CAPACITOR-FXD 150PF +-2.5% 160VDC POLYP | 28480 | 0160-4461 |
| A32C14 | 0160-4640 | 2 | 1 | CAPACITOR-FXD .1UF +-10% 100VDC | 28480 | 0160-4640 |
| A32C16 | 0160-0576 | 5 | 1 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A32C17 | 0180-0229 | 7 | 1 | CAPACITOR-FXD 33UF+-10% 10VDC TA | 56289 | 1500336X9010B2 |
| A32C18 | 0180-0228 | 6 | 2 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A32C19 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 1500226X9015B2 |
| A32C20 | 0160-3879 | 7 | 9 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C21 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C22 | 0160-3879 | 7 | 6 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C23 | 0180-0210 | 6 | 7 | CAPACITOR-FXD 3.30UF+-20% 15VDC TA | 56289 | 1500335X0015A2 |
| A32C24 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C25 | 0160-0576 | 5 | 9 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A32C26 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C27 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C28 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C29 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-4571 |
| A32C30 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-4571 |
| A32C32 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32C36 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A32C39 | 0180-0210 | 6 | 6 | CAPACITOR-FXD 3.30UF+-20% 15VDC TA | 56289 | 1500335X0015A2 |
| A32C80 | 0180-0210 | 6 | 6 | CAPACITOR-FXD 3.30UF+-20% 15VDC TA | 56289 | 1500335X0015A2 |
| A32C81 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A32CR1 | 1901-0040 | 1 | 9 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR2 | 1901-0040 | 1 | 9 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR3 | 1901-0518 | 8 | 4 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A32CR4 | 1901-0518 | 8 | 8 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A32CR5 | 1901-0518 | 8 | 8 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A32CR6 | 1901-0518 | 8 | 8 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A32CR7 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR8 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR9 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR10 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR11 | 1902-0048 | 1 | 1 | DIODE-ZNR 4.81V 5% DO-35 PD=.4W | 28480 | 1902-0048 |
| A32CR13 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR14 | 1902-3085 | 2 | 1 | DIODE-ZNR 4.75V 5% DO-35 PD=.4W | 28480 | 1902-3085 |
| A32CR15 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR20 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A32CR39 | 1902-0680 | 7 | 1 | DIODE-ZNR 1N827 6.2V 5% DO-7 PD=.4W | 24046 | 1N827 |
| A32L1 | 9100-3560 | 6 | 4 | INDUCTOR RF-CH-MLD 5.60H 5% .166DX.385LG | 28480 | 9100-3560 |
| A32L2 | 9100-3560 | 6 | 4 | INDUCTOR RF-CH-MLD 5.60H 5% .166DX.385LG | 28480 | 9100-3560 |
| A32L3 | 9100-3560 | 6 | 6 | INDUCTOR RF-CH-MLD 5.60H 5% .166DX.385LG | 28480 | 9100-3560 |
| A32L80 | 9100-3560 | 6 | 6 | INDUCTOR RF-CH-MLD 5.60H 5% .166DX.385LG | 28480 | 9100-3560 |
| A32Q1 | 1853-0089 | 5 | 10 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q2 | 1853-0089 | 5 | 5 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q3 | 1854-0092 | 2 | 11 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q4 | 1853-0089 | 5 | 5 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q5 | 1853-0089 | 5 | 5 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q8 | 1854-0475 | 5 | 1 | TRANSISTOR-DUAL NPN PD=750MW | 28480 | 1854-0475 |
| A32Q10 | 1853-0089 | 5 | 5 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q11 | 1855-0082 | 2 | 1 | TRANSISTOR J-FET P-CHAN D-MODE SI | 28480 | 1855-0082 |
| A32Q16 | 1855-0081 | 1 | 4 | TRANSISTOR J-FET N-CHAN D-MODE SI | 28480 | 1855-0081 |
| A32Q17 | 1855-0081 | 1 | 1 | TRANSISTOR J-FET N-CHAN D-MODE SI | 28480 | 1855-0081 |
| A32Q18 | 1854-0092 | 2 | 2 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q19 | 1854-0092 | 2 | 2 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q20 | 1854-0092 | 2 | 2 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q21 | 1853-0089 | 5 | 5 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q22 | 1855-0308 | 5 | 1 | TRANSISTOR-JFET DUAL N-CHAN D-MODE SI | 28480 | 1855-0308 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A32Q24 | 1854-0092 | 2 | 2 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q25 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q26 | 1853-0089 | 5 | | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q27 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| | 9170-0894 | 0 | | CORE-SHIELDING BEAD | 28480 | 9170-0894 |
| A32Q28 | 1853-0089 | 5 | 2 | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q29 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q30 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32Q31 | 1853-0089 | 5 | | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q32 | 1855-0081 | 1 | | TRANSISTOR J-FET N-CHAN D-MODE SI | 28480 | 1855-0081 |
| A32Q33 | 1855-0081 | 1 | 2 | TRANSISTOR J-FET N-CHAN D-MODE SI | 28480 | 1855-0081 |
| A32Q34 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| | 9170-0894 | 0 | | CORE-SHIELDING BEAD | 28480 | 9170-0894 |
| A32Q80 | 1853-0089 | 5 | | TRANSISTOR PNP 2N4917 SI PD=200MW | 07263 | 2N4917 |
| A32Q81 | 1854-0092 | 2 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A32R2 | 0757-0161 | 9 | 4 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A32R3 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1181-F |
| A32R4 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R6 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A32R7 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1181-F |
| A32R8 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R9 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A32R10 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A32R11 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R12 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A32R13 | 0683-4705 | 8 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R14 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A32R15 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A32R16 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A32R17 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A32R18 | 0757-0420 | 3 | 1 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A32R19 | 0698-3202 | 9 | | RESISTOR 1.74K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1741-F |
| A32R21 | 0698-4308 | 8 | | RESISTOR 16.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1692-F |
| A32R22 | 0757-0443 | 0 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A32R23 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+500 | 01121 | CB1035 |
| A32R24 | 0698-4431 | 8 | 6 | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R25 | 0698-4478 | 3 | | RESISTOR 10.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1072-F |
| A32R26 | 0698-4435 | 2 | | RESISTOR 2.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2491-F |
| A32R27 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1181-F |
| A32R28 | 0698-3179 | 9 | | RESISTOR 2.55K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2551-F |
| A32R29 | 0698-4202 | 1 | 3 | RESISTOR 8.87K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8871-F |
| A32R30 | 0698-4435 | 2 | | RESISTOR 2.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2491-F |
| A32R31 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1181-F |
| A32R32 | 0698-3179 | 9 | | RESISTOR 2.55K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2551-F |
| A32R33 | 0698-4202 | 1 | | RESISTOR 8.87K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8871-F |
| A32R34 | 0698-4435 | 2 | 1 | RESISTOR 2.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2491-F |
| A32R35 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1181-F |
| A32R36 | 0698-3179 | 9 | | RESISTOR 2.55K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2551-F |
| A32R37 | 0698-4202 | 1 | | RESISTOR 8.87K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8871-F |
| A32R38 | 0683-1015 | 7 | | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CB1015 |
| A32R39 | 0683-1525 | 4 | 8 | RESISTOR 1.5K 5% .25W FC TC=-400/+500 | 01121 | CB1525 |
| A32R40 | 0757-0443 | 0 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A32R41 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R42 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R43 | 0698-4431 | 8 | | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R44 | 0698-4431 | 8 | 8 | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R45 | 0698-4431 | 8 | | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R49 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R50 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A32R51 | 2100-3354 | 9 | | RESISTOR-TRMR 50K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3354 |
| A32R54 | 2100-3211 | 7 | 1 | RESISTOR-TRMR 1K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3211 |
| A32R59 | 0757-0200 | 7 | | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A32R60 | 0698-4431 | 8 | | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R61 | 2100-3303 | 4 | | RESISTOR-TRMR 50 10% C TOP-ADJ 1-TRN | 28480 | 2100-3303 |
| A32R62 | 0683-1055 | 5 | | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CB1055 |
| A32R63 | 0757-0442 | 9 | 5 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A32R64 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A32R65 | 0683-1065 | 3 | | RESISTOR 10M 5% .25W FC TC=-900/+1100 | 01121 | CB1065 |
| A32R66 | 0757-0446 | 3 | | RESISTOR 15K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1502-F |
| A32R67 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A32R68 | 0757-0401 | 0 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A32R69 | 0757-0446 | 3 | | RESISTOR 15K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1502-F |
| A32R70 | 0698-4431 | 8 | | RESISTOR 2.05K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2051-F |
| A32R71 | 0757-0418 | 9 | | RESISTOR 619 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-619R-F |
| A32R72 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|------------------|
| A32R73 | 0757-0274 | 5 | 1 | RESISTOR 1.21K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1211-F |
| A32R74 | 0698-3441 | 8 | 1 | RESISTOR 215 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-215R-F |
| A32R75 | 0698-3443 | 0 | 1 | RESISTOR 287 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-287R-F |
| A32R76 | 0757-0419 | 0 | 1 | RESISTOR 681 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-681R-F |
| A32R77 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R78 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R79 | 0757-0273 | 4 | 2 | RESISTOR 3.01K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-3011-F |
| A32R80 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1002-F |
| A32R81 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R82 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R83 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-101-F |
| A32R84 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A32R85 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-101-F |
| A32R86 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R87 | 0757-0427 | 0 | 2 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1501-F |
| A32R88 | 0757-0427 | 0 | | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1501-F |
| A32R89 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R90 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R91 | 0698-3512 | 4 | | RESISTOR 1.18K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1181-F |
| A32R92 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A32R93 | 0757-0443 | 0 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1102-F |
| A32R94 | 0698-4512 | 6 | 1 | RESISTOR 88.7K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-8872-F |
| A32R95 | 0683-3315 | 4 | 1 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A32R96 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R97 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R98 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R99 | 0757-0273 | 4 | | RESISTOR 3.01K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-3011-F |
| A32R100 | 0683-1525 | 4 | | RESISTOR 1.5K 5% .25W FC TC=-400/+700 | 01121 | CB1525 |
| A32R101* | 0698-4478 | 3 | 2 | RESISTOR 10.7K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1072-F |
| A32R101* | 0757-0442 | 9 | 4 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1002-F |
| A32R102 | 0757-0443 | 0 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-1102-F |
| A32R103 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A32R105 | 0757-0161 | 2 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-604R-F |
| A32R113 | 0757-0438 | 3 | | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4 1/8-T0-5111-F |
| A32U1 | 1820-0817 | 8 | 1 | IC FF ECL D-M/S DUAL | 04713 | KC10131P |
| A32U2 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| A32U3 | 1820-1196 | 8 | 1 | IC FF TTL LS D-TYPE PGS-EDGE-TRIG COM | 01295 | SN74LS174N |
| A32U4 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L595 | CA307T |
| A32U5 | 1821-0001 | 4 | 1 | TRANSISTOR ARRAY 14-PIN PLSTC DIP | 3L595 | CA3046 |
| A32U6 | 1810-0294 | 4 | 1 | NETWORK-RESISTOR 16 PIN DIP; RES | 28480 | 1810-0294 |
| A32U7 | 1826-0021 | 8 | 1 | IC OP AMP GP TO-99 PKG | 27014 | LM310H |
| A32U8 | 1820-0471 | 0 | 1 | IC INV TTL HEX 1-INP | 01295 | SN7406N |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A40 | 03586-66540 | 0 | 1 | FREQUENCY REFERENCE (3586A/B/C) | 28480 | 03586-66540 |
| A40C1 | 0160-0127 | 2 | 4 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A40C2 | 0160-0576 | 5 | 7 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C3 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C4 | 0160-4804 | 0 | 2 | CAPACITOR-FXD 56PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4804 |
| A40C5 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A40C6 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C7 | 0160-0939 | 4 | 2 | CAPACITOR-FXD 436PF +-5% 300VDC MICA | 28480 | 0160-0939 |
| A40C8 | 0160-3879 | 7 | 16 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C9 | 0160-0939 | 4 | 4 | CAPACITOR-FXD 436PF +-5% 300VDC MICA | 28480 | 0160-0939 |
| A40C10 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C11 | 0160-3879 | 7 | 2 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C12 | 0160-2206 | 2 | 2 | CAPACITOR-FXD 160PF +-5% 300VDC MICA | 28480 | 0160-2206 |
| A40C13 | 0160-0207 | 7 | 1 | CAPACITOR-FXD 330PF +-5% 500VDC MICA | 72136 | DM15F331J0500WV1CR |
| A40C14 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C15 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C16 | 0160-3879 | 7 | 9 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C30 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C31 | 0180-0309 | 4 | 1 | CAPACITOR-FXD 4.7UF +-20% 15VDC TA | 56269 | 150D475X0010A2 |
| A40C32 | 0160-4804 | 0 | 4 | CAPACITOR-FXD 56PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4804 |
| A40C33 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C34 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C35 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A40C36 | 0160-3875 | 3 | 4 | CAPACITOR-FXD 22PF +-5% 200VDC CER 0+-30 | 28480 | 0160-3875 |
| A40C37 | 0160-3877 | 5 | 4 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A40C39 | 0160-3877 | 5 | 5 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A40C41 | 0160-3877 | 5 | 5 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A40C42 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A40C50 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C51 | 0160-3875 | 3 | 3 | CAPACITOR-FXD 22PF +-5% 200VDC CER 0+-30 | 28480 | 0160-3875 |
| A40C52 | 0160-3875 | 3 | 3 | CAPACITOR-FXD 22PF +-5% 200VDC CER 0+-30 | 28480 | 0160-3875 |
| A40C53 | 0140-0199 | 6 | 1 | CAPACITOR-FXD 240PF +-5% 300VDC MICA | 72136 | DM15F241J0300WV1CR |
| A40C56 | 0160-2206 | 2 | 2 | CAPACITOR-FXD 160PF +-5% 300VDC MICA | 28480 | 0160-2206 |
| A40C57 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C62 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C63 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C64 | 0180-0228 | 6 | 4 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56269 | 150D226X9015B2 |
| A40C65 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56269 | 150D226X9015B2 |
| A40C66 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C67 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C68 | 0160-0174 | 9 | 2 | CAPACITOR-FXD .47UF +80-20% 25VDC CER | 28480 | 0160-0174 |
| A40C69 | 0160-0128 | 3 | 1 | CAPACITOR-FXD 2.2UF +-20% 50VDC CER | 28480 | 0160-0128 |
| A40C70 | 0180-1746 | 5 | 3 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56269 | 150D156X9020B2 |
| A40C71 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C72 | 0180-1746 | 5 | 5 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56269 | 150D156X9020B2 |
| A40C73 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C74 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C75 | 0160-0174 | 9 | 9 | CAPACITOR-FXD .47UF +80-20% 25VDC CER | 28480 | 0160-0174 |
| A40C76 | 0160-3877 | 5 | 5 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A40C90 | 0160-4787 | 8 | 2 | CAPACITOR-FXD 22PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4787 |
| A40C91 | 0160-4787 | 8 | 8 | CAPACITOR-FXD 22PF +-5% 100VDC CER 0+-30 | 28480 | 0160-4787 |
| A40C92 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C94 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C95 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C96 | 0140-0192 | 9 | 1 | CAPACITOR-FXD 66PF +-5% 300VDC MICA | 72136 | DM15F660J0300WV1CR |
| A40C97 | 0160-2202 | 8 | 1 | CAPACITOR-FXD 75PF +-5% 300VDC MICA | 28480 | 0160-2202 |
| A40C98 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A40C99 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C100 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C101 | 0180-1746 | 5 | 7 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56269 | 150D156X9020B2 |
| A40C102 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C103 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C104 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C105 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A40C106 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A40C107 | 0160-3875 | 3 | 3 | CAPACITOR-FXD 22PF +-5% 200VDC CER 0+-30 | 28480 | 0160-3875 |
| A40C108 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56269 | 150D226X9015B2 |
| A40C109 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56269 | 150D226X9015B2 |
| A40CR1 | 1901-0040 | 1 | 2 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR2 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR50 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR51 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR52 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A40CR53 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR54 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR55 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR90 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A40CR91 | 0122-0089 | 5 | 1 | DIODE-VVC 29PF 10% 03/C25-MIN=5 BVR=30V | 04713 | HV109 |
| A40DS1 | 1990-0486 | 6 | 1 | LCD-LAMP LUM-INT=1MCD IF=PCMA-MAX BVR=5V | 28480 | 5082-4684 |
| A40J1 | 1250-1512 | 3 | 6 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40J2 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40J3 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40J4 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40J5 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40J6 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A40L1 | 9140-0264 | 5 | 1 | INDUCTOR RF-CH-MLD 1.2UH 5% .166DX.385LG | 28480 | 9140-0264 |
| A40L2 | 9140-0144 | 0 | 15 | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L3 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L4 | 9100-3811 | 0 | 1 | INDUCTOR RF-CH-MLD 750NH 5% .166DX.385LG | 28480 | 9100-3811 |
| A40L5 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L6 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L7 | 9140-0399 | 7 | 1 | INDUCTOR RF-CH-MLD 2.2UH 5% .166DX.365LG | 28480 | 9140-0399 |
| A40L8 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L30 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L31 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L32 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L50 | 9100-3551 | 5 | 1 | INDUCTOR RF-CH-MLD 1UH 5% .166DX.385LG | 28480 | 9100-3551 |
| A40L55 | 9100-0541 | 7 | 4 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A40L56 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A40L57 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L58 | 9100-1636 | 3 | 2 | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A40L59 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A40L60 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L61 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L90 | 9100-3548 | 0 | 3 | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A40L91 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A40L92 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L94 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L95 | 9100-3911 | 1 | 1 | INDUCTOR RF-CH-MLD 220NH 5% .166DX.385LG | 28480 | 9100-3911 |
| A40L96 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L97 | 9100-3345 | 5 | 1 | INDUCTOR RF-CH-MLD 2UH 5% .166DX.385LG | 28480 | 9100-3345 |
| A40L98 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A40L99 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A40L100 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A40L101 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A40Q1 | 1853-0036 | 2 | 5 | TRANSISTOR PNP SI PD=313KW FT=253MHZ | 28480 | 1853-0036 |
| A40Q2 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A40Q30 | 1854-0019 | 3 | 2 | TRANSISTOR NPN SI TO-18 PD=360MW | 28480 | 1854-0019 |
| A40Q31 | 1853-0089 | 5 | 1 | TRANSISTOR PNP 2N4917 SI PL=200MW | 07263 | 2N4917 |
| A40Q32 | 1854-0019 | 3 | | TRANSISTOR NPN SI TO-18 PD=360MW | 28480 | 1854-0019 |
| A40Q33 | 1853-0449 | 0 | 1 | TRANSISTOR PNP SI TO-92 PD=625MW | 04713 | MPSH81 |
| A40Q50 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A40Q51 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A40Q52 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A40Q54 | 1854-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A40Q55 | 1855-0356 | 9 | 2 | TRANSISTOR J-FET 2N4392 N-CHAN D-MODE | 04713 | 2N4392 |
| A40Q56 | 1855-0386 | 9 | | TRANSISTOR J-FET 2N4392 N-CHAN D-MODE | 04713 | 2N4392 |
| A40Q90 | 1853-0405 | 9 | 2 | TRANSISTOR PNP SI PD=300MW FT=850MHZ | 04713 | 2N4209 |
| A40Q91 | 1853-0405 | 9 | | TRANSISTOR PNP SI PD=300MW FT=850MHZ | 04713 | 2N4209 |
| A40R1 | 0757-0277 | 8 | 5 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A40R2 | 0757-0401 | 0 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A40R3 | 0683-3315 | 4 | 10 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R4 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R5 | 0683-4715 | 0 | 12 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A40R6 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R7 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R8 | 0757-0284 | 7 | 2 | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A40R9 | 0757-0288 | 3 | 5 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A40R10 | 0757-0409 | 8 | 1 | RESISTOR 274 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-274R-F |
| A40R11 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A40R12 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R13 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R14 | 0757-0399 | 5 | 3 | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5-F |
| A40R15 | 0683-4305 | 4 | 8 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CR4305 |
| A40R16 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A40R17 | 0683-1025 | 9 | 15 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CR1025 |
| A40R18 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |
| A40R19 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CR4305 |
| A40R20 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CR3315 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A40R21 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R22 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R23 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R24 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A40R25 | 0757-0401 | 0 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A40R26 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R27 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A40R28 | 0683-6815 | 5 | 9 | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R29 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R30 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R31 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R32 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R33 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R34 | 0698-3178 | 8 | 1 | RESISTOR 487 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-487R-F |
| A40R35 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A40R36 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A40R37 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A40R38 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R39 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R40 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R42 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R43 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R44 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R45 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R46 | 0683-2035 | 3 | 2 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A40R47 | 0683-5125 | 8 | 3 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A40R48 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A40R49 | 0683-2205 | 9 | 1 | RESISTOR 22 5% .25W FC TC=-400/+500 | 01121 | CB2205 |
| A40R50 | 0757-0473 | 6 | 1 | RESISTOR 221K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2213-F |
| A40R51 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A40R52 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A40R53 | 0698-4450 | 1 | 1 | RESISTOR 324 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-324R-F |
| A40R54 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R55 | 0757-0284 | 7 | | RESISTOR 150 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-151-F |
| A40R59 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A40R66 | 0757-0442 | 9 | 3 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A40R67 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R68 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A40R69 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R70 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R71 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R72 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R73 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R74 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R75 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A40R76 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A40R77 | 0757-0447 | 4 | 1 | RESISTOR 16.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1622-F |
| A40R78 | 2100-3338 | 9 | 1 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 17-TRM | 73138 | 68XR5K |
| A40R79 | 0698-3215 | 4 | 1 | RESISTOR 499K 1% .125W F TC=0+-100 | 28480 | 0698-3215 |
| A40R80 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R81 | 0698-7332 | 4 | 2 | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A40R82 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A40R83 | 0698-3519 | 1 | 1 | RESISTOR 12.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1242-F |
| A40R84 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R85 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R86 | 0698-7332 | 4 | | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A40R87 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R88 | 0698-5094 | 1 | 1 | RESISTOR 5.1M 5% .25W FC TC=-900/+1100 | 01121 | CB5155 |
| A40R89 | 0698-3492 | 9 | 1 | RESISTOR 2.67K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2671-F |
| A40R90 | 0698-4386 | 2 | 2 | RESISTOR 59 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5920-F |
| A40R91 | 0698-3242 | 7 | 2 | RESISTOR 357 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357R-F |
| A40R93 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A40R94 | 0683-4305 | 4 | | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A40R96 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R97 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R98 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R99 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R100 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A40R101 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A40R102 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A40R103 | 0757-0399 | 5 | | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5-F |
| A40R104 | 0757-0399 | 5 | | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5-F |
| A40R105 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A40R106 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R107 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--------------------------------------|----------|------------------|
| A40R108 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A40R109 | 0683-6815 | 5 | | RESISTOR 680 5% .25W FC TC=-400/+600 | 01121 | CB6815 |
| A40R110 | 0698-3242 | 7 | | RESISTOR 357 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357R-F |
| A40R111 | 0698-4386 | 2 | | RESISTOR 59 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-59R0-F |
| A40T1 | 08552-6044 | 1 | 1 | TRANSFORMER 6-TURNS | 28480 | 08552-6044 |
| A40U1 | 1820-0810 | 1 | 2 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A40U2 | 1820-0806 | 5 | 6 | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40U3 | 1820-0806 | 5 | | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40U4 | 1820-0806 | 5 | | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40U30 | 1820-1251 | 6 | 1 | IC CNTR TTL LS DECD ASYNCHRO | 01295 | SN74LS196N |
| A40U31 | 1820-1383 | 5 | 2 | IC CNTR ECL BCD POS-EDGE-TRIG | 04713 | MC10138L |
| A40U32 | 1820-0803 | 2 | 2 | IC GATE ECL OR-NOR TPL | 04713 | MC10105P |
| A40U33 | 1820-1746 | 4 | 1 | IC BFR CMOS INV HEX | 04713 | MC14049UBCP |
| A40U51 | 1820-0806 | 5 | | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40U52 | 1820-0803 | 2 | | IC GATE ECL OR-NOR TPL | 04713 | MC10105P |
| A40U53 | 1820-1383 | 5 | | IC CNTR ECL BCD POS-EDGE-TRIG | 04713 | MC10138L |
| A40U54 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L565 | CA3097T |
| A40U55 | 1820-0478 | 7 | 1 | IC OP AMP LOW-BIAS-H-IMPD TO-99 PKG | 27014 | LM308H |
| A40U90 | 1820-0806 | 5 | | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40U92 | 1820-0810 | 1 | | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A40U93 | 1820-0806 | 5 | | IC GATE ECL OR-NOR DUAL 4-5-INP | 04713 | MC10109P |
| A40Y90 | 0410-0751 | 9 | 1 | CRYSTAL-QUARTZ 50 MHZ HC-18/U-HLDR | 28480 | 0410-0751 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A50 | 03586-66550 | 2 | 1 | STEP LOOP (3586A/B/C) | 28480 | 03586-66550 |
| A50C1 | 0160-4386 | 3 | 6 | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C2 | 0160-3879 | 7 | 53 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C3 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C4 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C5 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C6 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C7 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C8 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C9 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C10 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C11 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C12 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C13 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C14 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C15 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C16 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C17 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A50C18 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C19 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C20 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C21 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C22 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C23 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C24 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C25 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C26 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C27 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C28 | 0160-4385 | 2 | 1 | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A50C29 | 0160-4350 | 1 | 5 | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A50C30 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A50C31 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A50C32 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C33 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A50C34 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A50C35 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C36 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C37 | 0160-4389 | 6 | 5 | CAPACITOR-FXD 100PF +-5PF 200VDC CER | 28480 | 0160-4389 |
| A50C38 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C39 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C40 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C41 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C42 | 0180-1746 | 5 | 4 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A50C43 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A50C44 | 0160-0570 | 9 | 2 | CAPACITOR-FXD 220PF +-20% 100VDC CER | 20932 | 5024EM100RD221H |
| A50C45 | 0160-0570 | 9 | | CAPACITOR-FXD 220PF +-20% 100VDC CER | 20932 | 5024EM100RD221H |
| A50C46 | 0160-4389 | 6 | | CAPACITOR-FXD 100PF +-5PF 200VDC CER | 28480 | 0160-4389 |
| A50C47 | 0160-4389 | 6 | | CAPACITOR-FXD 100PF +-5PF 200VDC CER | 28480 | 0160-4389 |
| A50C48 | 0160-0164 | 7 | 1 | CAPACITOR-FXD .039UF +-10% 200VDC POLYE | 28480 | 0160-0164 |
| A50C49 | 0160-0571 | 0 | 3 | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A50C50 | 0160-4389 | 6 | | CAPACITOR-FXD 100PF +-5PF 200VDC CER | 28480 | 0160-4389 |
| A50C51 | 0180-0196 | 7 | 1 | CAPACITOR-FXD 56UF+-10% 15VDC TA | 56289 | 150D566X9015R2 |
| A50C70 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C71 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C72 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C73 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C74 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C75 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C76 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C77 | 0160-4389 | 6 | | CAPACITOR-FXD 100PF +-5PF 200VDC CER | 28480 | 0160-4389 |
| A50C78 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C79 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C80 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C81 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C82 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C83 | 0160-0127 | 2 | 2 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A50C84 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A50C85 | 0160-2205 | 1 | 1 | CAPACITOR-FXD 120PF +-5% 300VDC MICA | 28480 | 0160-2205 |
| A50C86 | 0160-0571 | 0 | | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A50C87 | 0160-2940 | 1 | 1 | CAPACITOR-FXD 470PF +-5% 300VDC MICA | 28480 | 0160-2940 |
| A50C88 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|------------------|
| A50C89 | 0160-0571 | 0 | | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A50C90 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A50C91 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A50C92 | 0160-0127 | 2 | | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A50C93 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C94 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C95 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C96 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 500D477H016DF7 |
| A50C97 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C98 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C99 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C100 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C101 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C102 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C103 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C104 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50C105 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A50CR1** | 0122-0098 | 6 | 2 | DIODE-VVC | 28480 | 0122-0098 |
| A50CR2 | 0122-0098 | 6 | | DIODE-VVC | 28480 | 0122-0098 |
| A50CR3 | 1901-0040 | 1 | 5 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A50CR4 | 1902-3149 | 9 | 1 | DIODE-ZNR 9.09V 5% DO-35 PD=.4W | 28480 | 1902-3149 |
| A50CR70 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A50CR71 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A50CR72 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A50CR73 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| | | | | **A50CR1, A50CR2, A51CR1 AND A51CR2 ARE A MATCHED SET OF VARICAPS. -HP- PART NUMBER 0122-0098 CONSISTS OF A REPLACEMENT OF SET OF 4 MATCHED VARICAPS. | | |
| A50DS70 | 1990-0486 | 6 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| A50J1 | 1250-1512 | 3 | 3 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A50J2 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A50J3 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A50L1 | 9100-2249 | 6 | 3 | INDUCTOR RF-CH-MLD 150NH 10% .105DX.26LG | 28480 | 9100-2249 |
| A50L2 | 9100-2249 | 6 | | INDUCTOR RF-CH-MLD 150NH 10% .105DX.26LG | 28480 | 9100-2249 |
| A50L3 | 9100-2249 | 6 | | INDUCTOR RF-CH-MLD 150NH 10% .105DX.26LG | 28480 | 9100-2249 |
| A50L4 | 9100-3560 | 6 | 7 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L5 | 9140-0409 | 0 | 1 | COIL-VAR 130NH-162NH Q=125 PC-MTG | 28480 | 9140-0409 |
| A50L6 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L7 | 9100-1636 | 3 | 4 | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A50L8 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A50L70 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L71 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L72 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L73 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50L74 | 9100-1641 | 0 | 1 | INDUCTOR RF-CH-MLD 240UH 5% .166DX.385LG | 28480 | 9100-1641 |
| A50L75 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A50L76 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A50L77 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A50L78 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A50Q1 | 1854-0345 | 8 | 10 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q2 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q3 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q4 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q5 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q6 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q7 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q8 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q9 | 1854-0215 | 1 | 5 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A50Q10 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q11 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A50Q70 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A50Q71 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A50Q72 | 1853-0036 | 2 | 3 | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A50Q73 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A50Q74 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A50Q75 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A50Q76 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A50R1 | 0757-0398 | 4 | 3 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A50R2 | 0757-0280 | 3 | 14 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R3 | 0683-4705 | 8 | 14 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CR4705 |
| A50R4 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R5 | 0757-0420 | 3 | 5 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|---------------------|
| A50R6 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R7 | 0698-3430 | 5 | 3 | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A50R8 | 0757-0407 | 6 | 5 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A50R9 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A50R10 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R11 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R12 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R13 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A50R14 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R15 | 0698-3430 | 5 | | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A50R16 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A50R17 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A50R18 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R19 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R20 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R21 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A50R22 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R23 | 0698-3430 | 5 | | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A50R24 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A50R25 | 0757-0291 | 6 | 3 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A50R26 | 0757-0416 | 7 | 1 | RESISTOR 511 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-511R-F |
| A50R27 | 0757-0279 | 0 | 2 | RESISTOR 3.16K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3161-F |
| A50R28 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R29 | 0757-0291 | 6 | | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A50R30 | 0698-4443 | 2 | 1 | RESISTOR 4.53K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4531-F |
| A50R31 | 0698-3242 | 7 | 1 | RESISTOR 357 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357R-F |
| A50R32 | 0698-3223 | 4 | 1 | RESISTOR 1.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1241-F |
| A50R33 | 0757-0464 | 5 | 1 | RESISTOR 90.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9092-F |
| A50R34 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R35 | 0757-0442 | 9 | 8 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R36 | 0757-0277 | 8 | 3 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A50R37 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A50R38 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A50R39 | 0757-0444 | 1 | 1 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A50R40 | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |
| A50R41 | 0757-0291 | 6 | | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A50R42 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R43 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R44 | 0757-0280 | 7 | 1 | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A50R45 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A50R46 | 2100-3253 | 7 | | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A50R47 | 0757-0401 | 0 | 1 | RESISTOR 180 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A50R48 | 0757-0462 | 3 | 1 | RESISTOR 75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7502-F |
| A50R49 | 0698-4496 | 5 | 1 | RESISTOR 45.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4532-F |
| A50R50 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A50R51 | 0683-2025 | 1 | 4 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A50R52 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A50R53 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A50R54 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R55 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| A50R56 | 0757-0279 | 0 | | RESISTOR 3.16K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3161-F |
| A50R70 | 0698-3132 | 4 | 4 | RESISTOR 261 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2610-F |
| A50R71 | 0698-3132 | 4 | | RESISTOR 261 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2610-F |
| A50R72 | 0698-3132 | 4 | | RESISTOR 261 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2610-F |
| A50R73 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R74 | 0757-0438 | 3 | 1 | RESISTOR 5.11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5111-F |
| A50R75 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R76 | 0683-4715 | 0 | 4 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A50R77 | 0698-3132 | 4 | | RESISTOR 261 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2610-F |
| A50R78 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R79 | 0757-0460 | 1 | 1 | RESISTOR 61.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6192-F |
| A50R80 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R81 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R82 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A50R83 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R84 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R85 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R86 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R87 | 0757-0346 | 2 | 4 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A50R88 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A50R89 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R90 | 0698-3557 | 7 | 1 | RESISTOR 806 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-806R-F |
| A50R92 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R93 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A50R94 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|------------------|
| A50R95 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R96 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R97 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R98 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A50R99 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A50R100 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A50R101 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A50R102 | 0683-4715 | 0 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A50R103 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R104 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A50R105 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A50R106 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A50R107 | 0757-0411 | 2 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A50RP70 | 1810-0167 | 0 | 3 | NETWORK-RES 8-SIP330.0 OHM X 4 | 01121 | 208B331 |
| A50RP71 | 1810-0167 | 0 | | NETWORK-RES 8-SIP330.0 OHM X 4 | 01121 | 208B331 |
| A50RP72 | 1810-0167 | 0 | | NETWORK-RES 8-SIP330.0 OHM X 4 | 01121 | 208B331 |
| A50RP73 | 1810-0121 | 6 | 1 | NETWORK-RES 9-SIP1.0K OHM X 8 | 91637 | CSP09C07-102J |
| A50RP74 | 1810-0037 | 3 | 1 | NETWORK-RES 16-DIP1.0K OHM X 8 | 11236 | 761-3-R1K |
| A50S1 | 3101-2039 | 8 | 1 | SWITCH-SL SPDT SUBMIN .5A 125VAC PC | 28480 | 3101-2039 |
| A50U1 | 1826-0043 | 4 | 1 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A50U70 | 1820-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| A50U71 | 1820-1788 | 4 | 2 | IC CNTR ECL BIN SYNCHRO POS-EDGE-TRIG | 07263 | F10016DC |
| A50U72 | 1820-1788 | 4 | | IC CNTR ECL BIN SYNCHRO POS-EDGE-TRIG | 07263 | F10016DC |
| A50U73 | 1826-0678 | 1 | 1 | IC OP AMP GP DUAL TO-99 PKG | 27014 | LM358H |
| A50U74 | 1820-0817 | 8 | 1 | IC FF ECL D-M/S DUAL | 04713 | MC10131P |
| A50U75 | 1820-0802 | 1 | 1 | IC GATE ECL NOR QUAD 2-INP | 04713 | MC10102P |
| A50U76 | 1820-1383 | 5 | 1 | IC CNTR ECL BCD POS-EDGE-TRIG | 04713 | MC10138L |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|-----------------|
| A51 | 03586-66551 | 3 | 1 | SUMMATION LOOP (3586A/B/C) | 28480 | 03586-66551 |
| A51C1 | 0160-4386 | 3 | 8 | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C2 | 0160-3879 | 7 | 34 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C3 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C4 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C5 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C6 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C7 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C8 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C9 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C10 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C11 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C12 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C13 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C14 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C15 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C16 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C17 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C18 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C19 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C20 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C21 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C22 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C23 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C24 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C25 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C26 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C27 | 0160-4386 | 3 | | CAPACITOR-FXD 33PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4386 |
| A51C28 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C29 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C30 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C31 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C32 | 0180-0196 | 7 | 1 | CAPACITOR-FXD 56UF+-10% 15VDC TA | 56289 | 150D56X9015R2 |
| A51C33 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C34 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C35 | 0160-4385 | 2 | 1 | CAPACITOR-FXD 15PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4385 |
| A51C36 | 0160-4350 | 1 | 5 | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A51C37 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A51C38 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A51C39 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C40 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A51C41 | 0160-4350 | 1 | | CAPACITOR-FXD 68PF +-5% 200VDC CER 0+-30 | 28480 | 0160-4350 |
| A51C42 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C43 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C44 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C45 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C46 | 0160-2611 | 3 | 1 | CAPACITOR-FXD 1UF +-10% 50VDC MET-POLYE | 28480 | 0160-2611 |
| A51C47 | 0160-3877 | 5 | 4 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A51C48 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A51C49 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C50 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A51C51 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020B2 |
| A51C52 | 0160-0155 | 6 | 1 | CAPACITOR-FXD 3300PF +-10% 200VDC POLYE | 28480 | 0160-0155 |
| A51C53 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C54 | 0160-0945 | 2 | 1 | CAPACITOR-FXD 910PF +-5% 100VDC MICA | 28480 | 0160-0945 |
| A51C55 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A51C56 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A51C57 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51C58 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A51CR1** | 0122-0098 | 6 | 2 | DIODE-VVC | 28480 | 0122-0098 |
| A51CR2 | 0122-0098 | 6 | | DIODE-VVC | 28480 | 0122-0098 |
| A51CR3 | 1901-0518 | 8 | 1 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A51CR4 | 1901-0050 | 3 | 2 | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A51CR5 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| | | | | **A51CR1, A51CR2, A50CR1 AND A50CR2 ARE A MATCHED SET OF VARICAPS. -HP- PART NUMBER 0122-0098 CONSISTS OF A REPLACE MENT SET OF 4 MATCHED VARICAPS. | | |
| A51J1 | 1250-1512 | 3 | 3 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A51J2 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A51J3 | 1250-1512 | 3 | | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A51J4 | 1250-1339 | 2 | 1 | CONNECTOR-RF SM-SLD M PC 50-OHM | 28480 | 1250-1339 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A51L1 | 9100-3314 | 8 | 4 | INDUCTOR RF-CH-MLD 150NH 5% .166DX.385LG | 28480 | 9100-3314 |
| A51L2 | 9100-3560 | 6 | 3 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A51L3 | 9100-3314 | 8 | | INDUCTOR RF-CH-MLD 150NH 5% .166DX.385LG | 28480 | 9100-3314 |
| A51L4 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A51L5 | 9100-3314 | 8 | | INDUCTOR RF-CH-MLD 150NH 5% .166DX.385LG | 28480 | 9100-3314 |
| A51L6 | 9100-3314 | 8 | | INDUCTOR RF-CH-MLD 150NH 5% .166DX.385LG | 28480 | 9100-3314 |
| A51L7 | 9100-3560 | 6 | | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A51L8 | 9140-0410 | 3 | 1 | COIL-VAR 166NH-194NH Q=125 PC-MTG | 28480 | 9140-0410 |
| A51L9 | 9100-1636 | 3 | 2 | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A51L10 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A51L11 | 9140-0397 | 5 | 1 | INDUCTOR RF-CH-MLD 9.1UH 5% .166DX.385LG | 28480 | 9140-0397 |
| A51Q1 | 1854-0345 | 8 | 13 | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q2 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q3 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q4 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q5 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q6 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q7 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q8 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q9 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q10 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q11 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q12 | 1854-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A51Q13 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51Q14 | 1854-0345 | 8 | | TRANSISTOR NPN 2N5179 SI TO-72 PD=200MW | 04713 | 2N5179 |
| A51R1 | 0757-0398 | 4 | 4 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A51R2 | 0757-0280 | 3 | 9 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R3 | 0683-4705 | 8 | 11 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R4 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R5 | 0757-0420 | 3 | 5 | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A51R6 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R7 | 0698-3430 | 5 | 3 | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A51R8 | 0757-0407 | 6 | 4 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A51R9 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A51R10 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R11 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R12 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R13 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A51R14 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R15 | 0698-3430 | 5 | | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A51R16 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A51R17 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A51R18 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R19 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R20 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R21 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A51R22 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R23 | 0683-6205 | 7 | 1 | RESISTOR 62 5% .25W FC TC=-460/+500 | 01121 | CB6205 |
| A51R24 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A51R25 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A51R26 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A51R27 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R28 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R29 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R30 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R31 | 0698-3430 | 5 | | RESISTOR 21.5 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-21R5-F |
| A51R32 | 0757-0398 | 4 | | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A51R33 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R34 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R35 | 0757-0416 | 7 | 1 | RESISTOR 511 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-511R-F |
| A51R36 | 0757-0279 | 0 | 1 | RESISTOR 3.16K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3161-F |
| A51R37 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A51R38 | 0757-0291 | 6 | 2 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A51R39 | 0698-4443 | 2 | 1 | RESISTOR 4.53K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4531-F |
| A51R40 | 0698-3242 | 7 | 2 | RESISTOR 357 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357R-F |
| A51R41 | 0698-3242 | 7 | | RESISTOR 357 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-357R-F |
| A51R42 | 0698-3223 | 4 | 1 | RESISTOR 1.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1241-F |
| A51R43 | 0757-0464 | 5 | 1 | RESISTOR 90.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9092-F |
| A51R44 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A51R45 | 0757-0442 | 9 | 3 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A51R46 | 0757-0277 | 8 | 2 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A51R47 | 0757-0277 | 8 | | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A51R48 | 0757-0420 | 3 | | RESISTOR 750 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-751-F |
| A51R49 | 0757-0444 | 1 | 1 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A51R50 | 0698-4473 | 8 | 1 | RESISTOR 8.06K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8061-F |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|-------------------|
| A51R51 | 0757-0291 | 6 | | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A51R52 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A51R53 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A51R54 | 0757-0200 | 7 | 1 | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A51R55 | 2100-3253 | 7 | 2 | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A51R56 | 2100-3253 | 7 | | RESISTOR-TRMR 50K 10% C TOP-ADJ 1-TRN | 28480 | 2100-3253 |
| A51R57 | 0757-0401 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A51R58 | 0757-0180 | 2 | 1 | RESISTOR 31.6 1% .125W F TC=0+-100 | 28480 | 0757-0180 |
| A51R59 | 0757-0462 | 3 | 1 | RESISTOR 75K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7502-F |
| A51R60 | 0698-4496 | 5 | 1 | RESISTOR 45.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4532-F |
| A51S1 | 3101-2039 | 8 | 1 | SWITCH-SL SPDT SUBMIN .5A 125VAC PC | 28480 | 3101-2039 |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A52 | 03506-66552 | 4 | 1 | SUM LOOP MIXER (3586A/R/C) | 28480 | 03506-66552 |
| A52C1 | 0160-0570 | 9 | 2 | CAPACITOR-FXD 220PF +-20% 100VDC CER | 28932 | 5024EM100RD221M |
| A52C2 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C3 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C4 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C5 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C6 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C7 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C8 | 0160-3879 | 7 | 7 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A52C9 | 0160-0576 | 5 | 8 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C10 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C11 | 0160-0570 | 9 | 5 | CAPACITOR-FXD 220PF +-20% 100VDC CER | 28932 | 5024EM100RD221M |
| A52C14 | 0140-0205 | 0 | 2 | CAPACITOR-FXD 62PF +-5% 300VDC MICA | 72136 | DM15E620J0300W1CR |
| A52C15 | 0180-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28480 | 0160-2204 |
| A52C16 | 0140-0205 | 5 | 1 | CAPACITOR-FXD 62PF +-5% 300VDC MICA | 72136 | DM15E620J0300W1CR |
| A52C17 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C18 | 0160-2266 | 4 | 2 | CAPACITOR-FXD 24PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2266 |
| A52C19 | 0160-2266 | 4 | 2 | CAPACITOR-FXD 24PF +-5% 500VDC CER 0+-30 | 28480 | 0160-2266 |
| A52C20 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 28VDC TA | 56289 | 150D156X9020B2 |
| A52C21 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 28VDC TA | 56289 | 150D156X9020B2 |
| A52C22 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C23 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C24 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C25 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C26 | 0160-0576 | 5 | 5 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A52C28 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 500D477H016DF7 |
| A52CR1 | 1902-0041 | 4 | 1 | DIODE-ZNR 5.11V 5% DO-35 PD=.4W | 28480 | 1902-0041 |
| A52J1 | 1250-1512 | 3 | 2 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A52J2 | 1250-1512 | 3 | 2 | CONNECTOR-RF SMB M PC 50-OHM | 28480 | 1250-1512 |
| A52L1 | 9100-3560 | 6 | 2 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A52L2 | 9100-3560 | 6 | 2 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.385LG | 28480 | 9100-3560 |
| A52L3 | 9140-0400 | 1 | 2 | INDUCTOR RF-CH-MLD 8.2UH 5% .166DX.385LG | 28480 | 9140-0400 |
| A52L4 | 9140-0400 | 1 | 2 | INDUCTOR RF-CH-MLD 8.2UH 5% .166DX.385LG | 28480 | 9140-0400 |
| A52L5 | 9140-0398 | 6 | 1 | INDUCTOR RF-CH-MLD 12UH 5% .166DX.385LG | 28480 | 9140-0398 |
| A52L6 | 9140-0237 | 2 | 2 | INDUCTOR RF-CH-MLD 200UH 5% .166DX.385LG | 28480 | 9140-0237 |
| A52L7 | 9140-0237 | 2 | 2 | INDUCTOR RF-CH-MLD 200UH 5% .166DX.385LG | 28480 | 9140-0237 |
| A52L8 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.51G | 28480 | 9100-0541 |
| A52Q1 | 1853-0036 | 2 | 1 | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A52Q2 | 1654-0215 | 1 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A52R1 | 0757-0398 | 4 | 2 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A52R2 | 0683-4305 | 4 | 5 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A52R3 | 0757-0398 | 4 | 4 | RESISTOR 75 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-75R0-F |
| A52R4 | 0683-4305 | 4 | 4 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A52R5 | 0683-4305 | 4 | 4 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A52R6 | 0683-4305 | 4 | 2 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A52R7 | 0683-3005 | 9 | 2 | RESISTOR 30 5% .25W FC TC=-400/+500 | 01121 | CB3005 |
| A52R8 | 0683-3005 | 9 | 2 | RESISTOR 30 5% .25W FC TC=-400/+500 | 01121 | CB3005 |
| A52R9 | 0757-0411 | 2 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A52R10 | 0757-0291 | 6 | 2 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A52R11 | 0698-4396 | 4 | 1 | RESISTOR 80.6 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-80R6-F |
| A52R12 | 0757-0412 | 3 | 1 | RESISTOR 365 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-365R-F |
| A52R13 | 0698-4439 | 6 | 1 | RESISTOR 3.24K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3241-F |
| A52R14 | 0698-3511 | 3 | 4 | RESISTOR 665 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-665R-F |
| A52R15 | 0757-0282 | 5 | 1 | RESISTOR 221 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-221R-F |
| A52R16 | 0698-3511 | 3 | 1 | RESISTOR 665 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-665R-F |
| A52R17 | 0683-1515 | 2 | 1 | RESISTOR 150 5% .25W FC TC=-400/+600 | 01121 | CB1515 |
| A52R18 | 0683-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A52R19 | 0683-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A52R20 | 0683-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A52R21 | 0698-3511 | 3 | 1 | RESISTOR 665 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-665R-F |
| A52R23 | 0683-4305 | 4 | 4 | RESISTOR 43 5% .25W FC TC=-400/+500 | 01121 | CB4305 |
| A52R24 | 0698-3511 | 3 | 1 | RESISTOR 665 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-665R-F |
| A52R25 | 0757-0291 | 6 | 3 | RESISTOR 24.9 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-2492-F |
| A52U1 | 1826-0598 | 4 | 1 | IC 14-DIP-P PKG | 04713 | MC12002P |
| A52U1 | 1200-0474 | 9 | 1 | SOCKET-IC 14-COINT DIP-SLDR | 28480 | 1200-0474 |
| A52U2 | 1826-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |
| | 9170-0894 | 0 | 1 | CORE-SHIELDING BEAD | 28480 | 9170-0894 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A53 | 03586-66553 | 5 | 1 | SUM PHASE DETECTOR (3586A/B/C) | 28480 | 03586-66553 |
| A53C2 | 0160-3879 | 7 | 9 | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C4 | 0160-0576 | 5 | 6 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C5 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C6 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C7 | 0160-3877 | 5 | 5 | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A53C8 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C9 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C10 | 0160-0127 | 2 | 3 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A53C11 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A53C12 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A53C14 | 0160-0161 | 4 | 1 | CAPACITOR-FXD .01UF +-10% 200VDC POLYE | 28480 | 0160-0161 |
| A53C15 | 0160-0301 | 4 | 1 | CAPACITOR-FXD .012UF +-10% 200VDC POLYE | 28480 | 0160-0301 |
| A53C16 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C17 | 0160-0127 | 2 | | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A53C18 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C19 | 0160-0571 | 0 | 3 | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A53C20 | 0160-0571 | 0 | | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A53C21 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A53C22 | 0180-1746 | 5 | 2 | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020R2 |
| A53C23 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C24 | 0180-1746 | 5 | | CAPACITOR-FXD 15UF+-10% 20VDC TA | 56289 | 150D156X9020R2 |
| A53C25 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C26 | 0160-3877 | 5 | | CAPACITOR-FXD 100PF +-20% 200VDC CER | 28480 | 0160-3877 |
| A53C27 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A53C28 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C29 | 0160-0571 | 0 | | CAPACITOR-FXD 470PF +-20% 100VDC CER | 28480 | 0160-0571 |
| A53C30 | 0160-0576 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C31 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56269 | 500D477H0160F7 |
| A53C32 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C33 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A53C35 | 0160-0127 | 2 | | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A53CR2 | 1901-0040 | 1 | 6 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53CR3 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53CR4 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53CR5 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53CR6 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53CR7 | 1901-0040 | 1 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A53DS1 | 1990-0486 | 6 | 1 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| A53J1 | 1250-1339 | 2 | 1 | CONNECTOR-RF SM-SLD M PC 50-OHM | 28480 | 1250-1339 |
| A53L1 | 9100-3560 | 6 | 1 | INDUCTOR RF-CH-MLD 5.6UH 5% .166DX.395LG | 28480 | 9100-3560 |
| A53L2 | 9140-0398 | 6 | 1 | INDUCTOR RF-CH-MLD 12UH 5% .166DX.395LG | 28480 | 9140-0398 |
| A53L3 | 9100-1636 | 3 | 2 | INDUCTOR RF-CH-MLD 110UH 5% .166DX.395LG | 28480 | 9100-1636 |
| A53L4 | 9100-1636 | 3 | | INDUCTOR RF-CH-MLD 110UH 5% .166DX.395LG | 28480 | 9100-1636 |
| A53L5 | 9140-0144 | 0 | 3 | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A53L6 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A53L7 | 9140-0144 | 0 | | INDUCTOR RF-CH-MLD 4.7UH 10% .105DX.26LG | 28480 | 9140-0144 |
| A53L8 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A53Q1 | 1853-0036 | 2 | 4 | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A53Q2 | 1854-0215 | 1 | 3 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A53Q3 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A53Q4 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A53Q5 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A53Q6 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A53Q7 | 1853-0036 | 2 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A53R1 | 0698-6338 | 8 | 1 | RESISTOR 5K 1% .125W F TC=0+-25 | 28480 | 0698-6338 |
| A53R2 | 0698-7960 | 4 | 2 | RESISTOR 7.87K 1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-7871-F |
| A53R3 | 2100-3353 | 8 | 1 | RESISTOR TRMR 20K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3353 |
| A53R4 | 0698-6871 | 4 | 1 | RESISTOR 10K .5% .125W F TC=0+-50 | 28480 | 0698-6871 |
| A53R5 | 0698-7960 | 4 | | RESISTOR 7.87K 1% .125W F TC=0+-25 | 19701 | MF4C1/8-T9-7871-F |
| A53R6 | 0757-0449 | 6 | 1 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A53R7 | 0757-0283 | 6 | 5 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A53R8 | 0757-0469 | 0 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |
| A53R9 | 0698-4493 | 2 | 3 | RESISTOR 34K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3402-F |
| A53R10 | 0757-0283 | 6 | 3 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A53R11 | 0698-3264 | 3 | 2 | RESISTOR 11.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1182-F |
| A53R12 | 0683-3315 | 4 | 17 | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R13 | 2100-3274 | 2 | 1 | RESISTOR-TRMR 10K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3274 |
| A53R14 | 0757-0346 | 2 | 7 | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A53R15 | 0683-1025 | 9 | 5 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--------------------------------------|----------|------------------|
| A53R16 | 0757-0442 | 9 | 6 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A53R18 | 0683-4795 | 8 | 8 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R19 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10P0-F |
| A53R20 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A53R21 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10G2-F |
| A53R22 | 0757-0407 | 6 | 2 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A53R23 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10P0-F |
| A53R24 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A53R25 | 0757-0411 | 2 | 2 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A53R26 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A53R27 | 0698-3264 | 3 | | RESISTOR 11.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1182-F |
| A53R28 | 0678-4435 | 2 | 1 | RESISTOR 2.49K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2491-F |
| A53R29 | 0698-4493 | 2 | | RESISTOR 34K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3402-F |
| A53R30 | 0757-0283 | 6 | | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A53R31 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R32 | 0683-4795 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R33 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R34 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A53R35 | 0757-0283 | 6 | | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A53R36 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R37 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R38 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A53R39 | 0698-4493 | 2 | | RESISTOR 34K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3402-F |
| A53R40 | 0757-0280 | 3 | 2 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A53R41 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A53R42 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R43 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R44 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R45 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R46 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R47 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A53R48 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A53R49 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R50 | 0757-0407 | 6 | | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A53R51 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10P0-F |
| A53R52 | 0757-0346 | 2 | | RESISTOR 10 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-10R0-F |
| A53R53 | 0698-3557 | 7 | 1 | RESISTOR 806 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-806R-F |
| A53R54 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A53R55 | 0757-0283 | 6 | | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A53R56 | 0698-3495 | 2 | 1 | RESISTOR 866 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-866R-F |
| A53R57 | 0757-0411 | 2 | | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A53R58 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A53R59 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R60 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R61 | 0683-2415 | 3 | 1 | RESISTOR 240 5% .25W FC TC=-400/+600 | 01121 | CB2415 |
| A53R62 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A53R63 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53R64 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R65 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R66 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R67 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R69 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R70 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R71 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R72 | 0683-3315 | 4 | | RESISTOR 330 5% .25W FC TC=-400/+600 | 01121 | CB3315 |
| A53R73 | 0683-4795 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| A53U1 | 1826-0043 | 4 | 2 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A53U2 | 1826-0043 | 4 | | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A53U3 | 1826-0678 | 1 | 1 | IC OP AMP GP DUAL TO-99 PKG | 27014 | LN359H |
| A53U4 | 1820-0802 | 1 | 1 | IC GATE ECL NOR QUAD 2-INP | 04713 | MC10102P |
| A53U5 | 1820-0803 | 2 | 1 | IC GATE ECL OR-NOR TPL | 04713 | MC10105P |
| A53U6 | 1820-0817 | 8 | 1 | IC FF ECL D-M/S DUAL | 04713 | MC10131P |
| A53U6 | 1200-0473 | 8 | 1 | SOCKET-IC 16-CONT DIP DIP-SLDR | 28480 | 1200-0473 |
| A53U7 | 1820-0810 | 1 | 1 | IC RCVR ECL LINE RCVR TPL 2-INP | 04713 | MC10116P |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|--------------------|
| A60 | 03586-66560 | 4 | 1 | CONTROLLER (3506A/B/C) | 28480 | 03586-66560 |
| A60C1 | 0180-0210 | 6 | 1 | CAPACITOR-FXD 3.3UF+-20% 15VDC TA | 56289 | 150D335X0015A2 |
| A60C3 | 0160-3165 | 4 | 1 | CAPACITOR-FXD .047UF +-2% 50VDC POLYE | 28480 | 0160-3165 |
| A60C4 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A60C5 | 0180-0228 | 6 | 3 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A60C6 | 0160-4571 | 8 | 14 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C7 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C8 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C9 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C10 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C11 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C12 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C13 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C14 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C15 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C16 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C17 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C18 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C19 | 0160-3847 | 9 | 2 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A60C20 | 0160-4571 | 8 | 8 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A60C21 | 0160-3847 | 9 | 8 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A60C29 | 0180-0369 | 4 | 1 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A60C30 | 0160-0127 | 2 | 3 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A60C31 | 0160-2307 | 4 | 1 | CAPACITOR-FXD 47PF +-5% 300VDC MICA | 28480 | 0160-2307 |
| A60C32 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A60C33 | 0140-0200 | 0 | 1 | CAPACITOR-FXD 390PF +-5% 300VDC MICA | 72136 | DM15F391J0300WV1CR |
| A60C34 | 0160-0127 | 2 | 2 | CAPACITOR-FXD .1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A60C36 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A60C37 | 0160-0363 | 8 | 1 | CAPACITOR-FXD 620PF +-5% 300VDC MICA | 28480 | 0160-0363 |
| A60CR1 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A60CR2 | 1901-0040 | 1 | 4 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A60CR4 | 1901-0518 | 8 | 2 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A60CR5 | 1901-0518 | 8 | 8 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0518 |
| A60CR6 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A60CR7 | 1901-0535 | 9 | 1 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0535 |
| A60CR8 | 1901-0040 | 1 | 1 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A60J1 | 1810-0307 | 0 | 1 | NETWORK-CNDCT MODULE DIP; 16 PINS; 0.100 | 28480 | 1810-0307 |
| A60L1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A60L2 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A60L3 | 9100-1628 | 3 | 1 | INDUCTOR RF-CH-MLD 43UH 5% .166DX.305LG | 28480 | 9100-1628 |
| A60Q1 | 1853-0020 | 4 | 1 | TRANSISTOR PNP SI PD=300MW FT=150MHZ | 28480 | 1853-0020 |
| A60R1 | 0683-2015 | 9 | 3 | RESISTOR 200 5% .25W FC TC=-400/+600 | 01121 | CR2015 |
| A60R2 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A60R3 | 0683-3025 | 3 | 4 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CR3025 |
| A60R4 | 0683-3925 | 3 | 3 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CR3025 |
| A60R5 | 1810-0269 | 3 | 4 | NETWORK-RES 9-SIP10.0K 03M X 8 | 28480 | 1810-0269 |
| A60R6 | 0683-2415 | 3 | 1 | RESISTOR 240 5% .25W FC TC=-400/+600 | 01121 | CR2415 |
| A60R7 | 0683-2015 | 9 | 3 | RESISTOR 200 5% .25W FC TC=-400/+600 | 01121 | CR2015 |
| A60R8 | 0683-3025 | 3 | 3 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CR3025 |
| A60R9 | 0683-3025 | 3 | 3 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CR3025 |
| A60R10 | 0757-0288 | 1 | 1 | RESISTOR 7.0%K 1% .125W F TC=0+-100 | 19701 | HF4C1/8-T0-9091-F |
| A60R11 | 0683-1055 | 5 | 1 | RESISTOR 1M 5% .25W FC TC=-800/+900 | 01121 | CR1055 |
| A60R12 | 0683-2015 | 9 | 2 | RESISTOR 200 5% .25W FC TC=-400/+600 | 01121 | CR2015 |
| A60R13 | 0683-4715 | 0 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A60R14 | 0683-4715 | 0 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CR4715 |
| A60R15 | 1810-0206 | 8 | 1 | NETWORK-RES 8-SIP10.0K 03M X 7 | 01121 | CR8A103 |
| A60R16 | 1810-0269 | 3 | 1 | NETWORK-RES 9-SIP10.0K 03M X 8 | 28480 | 1810-0269 |
| A60R17 | 0698-4487 | 4 | 1 | RESISTOR 25.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2552-F |
| A60R18 | 0683-2025 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A60R19 | 0698-4486 | 3 | 2 | RESISTOR 24.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2492-F |
| A60R20 | 0683-3915 | 0 | 1 | RESISTOR 390 5% .25W FC TC=-400/+600 | 01121 | CR3915 |
| A60R21 | 0757-0464 | 5 | 1 | RESISTOR 90.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9092-F |
| A60R22 | 1810-0269 | 3 | 3 | NETWORK-RES 9-SIP10.0K 03M X 8 | 28480 | 1810-0269 |
| A60R23 | 1810-0269 | 3 | 3 | NETWORK-RES 9-SIP10.0K 03M X 8 | 28480 | 1810-0269 |
| A60R24 | 0683-5135 | 0 | 2 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CR5135 |
| A60R25 | 0683-5135 | 0 | 2 | RESISTOR 51K 5% .25W FC TC=-400/+800 | 01121 | CR5135 |
| A60R26 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A60R27 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | CR1015 |
| A60R28 | 0698-4486 | 3 | 1 | RESISTOR 24.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2492-F |
| A60R30 | 0683-5105 | 4 | 1 | RESISTOR 51 5% .25W FC TC=-400/+500 | 01121 | CR5105 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A60S1 | 3101-1860 | 1 | 1 | SWITCH-SL 5-1A DIP-SLIDE ASSY .1A 50VDC | 28480 | 3101-1860 |
| A60S2 | 3101-2094 | 5 | 1 | SWITCH-RKR DIP-RKR-ASSY 8-1A .05A 30VDC | 28480 | 3101-2094 |
| A60U1 | 1820-1759 | 9 | 2 | IC BFR TTL LS NON-INV OCTL | 27014 | DM81LS97N |
| A60U2 | 1820-1204 | 9 | 1 | IC GATE TTL LS NAND DUAL 4-INP | 01295 | SN74LS20N |
| A60U3 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| A60U4 | 1820-1199 | 1 | 3 | IC INV TTL LS HEX 1-INP | 01295 | SN74LS04N |
| A60U5 | 1820-2036 | 7 | 1 | IC DRVR NMOS CLOCK DRVR | 04713 | MC6875L |
| A60U6 | 1820-1480 | 3 | 1 | IC MICPROC NMOS 8-BIT | 04713 | MC6800L |
| A60U6 | 1200-0659 | 2 | 2 | SOCKET-IC 40-CONT DIP-SLDR | 28480 | 1200-0659 |
| A60U7* | 1818-1159 | 8 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U7 | 1818-1515 | 0 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 6 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U8 | 1818-1158 | 7 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U8 | 1818-1514 | 9 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U9 | 1818-1157 | 6 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U9 | 1818-1513 | 8 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U10 | 1818-1156 | 5 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U10 | 1818-1512 | 7 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U11 | 1818-1455 | 4 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U11 | 1818-1511 | 6 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U12 | 1818-1154 | 3 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 55576 | SYP2332 MASKED |
| A60U12 | 1818-1510 | 5 | 1 | IC NMOS 32768 (32K) ROM 450-NS 3-S | 33297 | EA8332APC MASKED |
| | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A60U13 | 1820-1759 | 9 | 1 | IC BFR TTL LS NON-INV OCTL | 27014 | DM81LS97N |
| A60U13 | 1200-0700 | 4 | 1 | SOCKET-IC 20-CONT DIP DIP-SLDR | 28480 | 1200-0700 |
| A60U14 | 1818-0439 | 4 | 2 | IC NMOS 4096 (4K) STAT RAM 450-NS 3-S | 01295 | TM62114-45NL |
| A60U16 | 1818-0438 | 4 | 4 | IC NMOS 4096 (4K) STAT RAM 450-NS 3-S | 01295 | TM62114-45NL |
| A60U18 | 1820-1481 | 4 | 1 | IC NMOS | 04713 | MC6821L |
| A60U18 | 1200-0659 | 2 | 1 | SOCKET-IC 40-CONT DIP-SLDR | 28480 | 1200-0659 |
| A60U19 | 1820-1975 | 1 | 1 | IC SHFT-RCTR TTL LS NEG-EDGE-TRIG PRL-IN | 01295 | SN74LS165N |
| A60U20 | 1826-0119 | 5 | 1 | IC TIMER TTL MONO/ASTBL | 18324 | NE555T |
| A60U21 | 1820-1730 | 6 | 2 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A60U22 | 1820-1730 | 6 | 3 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A60U23 | 1826-0626 | 3 | 1 | IC COMPARATOR PRNC TO-99 PKG | 01295 | LM311L |
| A60U24 | 1820-1216 | 3 | 4 | IC DCDR TTL LS 3-TO-8-LINE 3-INP | 01295 | SN74LS138N |
| A60U25 | 1820-1208 | 3 | 1 | IC GATE TTL LS OR QUAD 2-INP | 01295 | SN74LS32N |
| A60U26 | 1820-1216 | 3 | 3 | IC DCDR TTL LS 3-TO-8-LINE 3-INP | 01295 | SN74LS138N |
| A60U27 | 1820-1199 | 1 | 1 | IC INV TTL LS HEX 1-INP | 01295 | SN74LS04N |
| A60U28 | 1818-1809 | 7 | 2 | IC CMOS 1824 (1K) STAT RAM 360-NS 3-S | 32293 | IM65X61-CJN |
| A60U29 | 1818-1809 | 7 | 2 | IC CMOS 1824 (1K) STAT RAM 360-NS 3-S | 32293 | IM65X61-CJN |
| A60U30 | 1820-1216 | 3 | 1 | IC DCDR TTL LS 3-TO-8-LINE 3-INP | 01295 | SN74LS138N |
| A60U31 | 1820-1216 | 3 | 1 | IC DCDR TTL LS 3-TO-8-LINE 3-INP | 01295 | SN74LS138N |
| A60U32 | 1820-1199 | 1 | 1 | IC INV TTL LS HEX 1-INP | 01295 | SN74LS04N |
| A60U33 | 1820-1201 | 6 | 2 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A60U34 | 1820-1367 | 5 | 1 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A60U35 | 1820-1201 | 6 | 1 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A60U36 | 1820-1238 | 9 | 2 | IC MUXR/DATA SEL TTL LS 4-TO-1-LINE DUAL | 01295 | SN74LS253N |
| A60U37 | 1826-0759 | 9 | 1 | IC COMPARATOR CP QUAD 14-DIP-C PKG | 04713 | LM339J |
| A60U38 | 1820-1238 | 9 | 1 | IC MUXR/DATA-SEL TTL LS 4-TO-1-LINE DUAL | 01295 | SN74LS253N |
| A60U39 | 1820-1298 | 1 | 4 | IC MUXR/DATA-SEL TTL LS 8-TO-1-LINE | 01295 | SN74LS251N |
| A60U40 | 1820-1298 | 1 | 1 | IC MUXR/DATA-SEL TTL LS 8-TO-1-LINE | 01295 | SN74LS251N |
| A60U41 | 1820-1298 | 1 | 1 | IC MUXR/DATA-SEL TTL LS 8-TO-1-LINE | 01295 | SN74LS251N |
| A60U42 | 4040-0747 | 2 | 1 | EXTR-PC BD GRA POLYC .062-BD-THKNS | 28480 | 4040-0747 |
| | 4040-0748 | 3 | 1 | EXTR-PC BD BLK POLYC .062-BD-THKNS | 28480 | 4040-0748 |
| | 1200-0539 | 7 | 2 | SOCKET-IC 18-CONT DIP DIP-SLDR | 28480 | 1200-0539 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| A61 | 03586-66561 | 5 | 1 | HP INTERFACE BUS (3586A/B/C) | 28480 | 03586-66561 |
| A61C1 | 0160-4571 | 8 | 1 | CAPACITOR-FXD .1UF +80-20% 50VDC CER | 28480 | 0160-4571 |
| A61C2 | 0180-0228 | 6 | 2 | CAPACITOR-FXD 22UF +-10% 15VDC TA | 56257 | 150D226X9015B2 |
| A61C3 | 0180-0228 | 6 | 6 | CAPACITOR-FXD 22UF +-10% 15VDC TA | 56287 | 150D226X9015B2 |
| A61C4 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C5 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C6 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C7 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C8 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C9 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C10 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C11 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61C12 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A61CR1 | 1902-3036 | 3 | 2 | DIODE-ZNR 3.16V 5% DO-7 PD=.4W TC=-.064% | 28480 | 1902-3036 |
| A61CR2 | 1902-3036 | 3 | 2 | DIODE-ZNR 3.16V 5% DO-7 PD=.4W TC=-.064% | 28480 | 1902-3036 |
| A61L1 | 9100-4031 | 8 | 1 | TRANSFORMER TND: 2.25 MAY -10%, +50%, DC | 28480 | 9100-4031 |
| A61L2 | 9100-0541 | 7 | 1 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.385LG | 28480 | 9100-0541 |
| A61L3* | 9100-1636 | 3 | 1 | INDUCTOR RF-CH-MLD 110UH 5% .166DX.385LG | 28480 | 9100-1636 |
| A61L3* | 9100-1637 | 4 | 1 | INDUCTOR RF-CH-MLD 120UH 5% .166DX.385LG | 28480 | 9100-1637 |
| A61L3* | 9100-1638 | 5 | 1 | INDUCTOR RF-CH-MLD 130UH 5% .166DX.385LG | 28480 | 9100-1638 |
| A61L3* | 9100-1639 | 6 | 1 | INDUCTOR RF-CH-MLD 150UH 5% .166DX.385LG | 28480 | 9100-1639 |
| A61L3* | 9100-1640 | 9 | 1 | INDUCTOR RF-CH-MLD 160UH 5% .166DX.385LG | 28480 | 9100-1640 |
| A61L3* | 9140-0129 | 1 | 1 | INDUCTOR RF-CH-MLD 220UH 5% .166DX.385LG | 28480 | 9140-0129 |
| A61L3* | 9140-0138 | 2 | 1 | INDUCTOR RF-CH-MLD 180UH 5% .166DX.385LG | 28480 | 9140-0138 |
| A61L3* | 9140-0210 | 1 | 1 | INDUCTOR RF-CH-MLD 190UH 5% .166DX.385LG | 28480 | 9140-0210 |
| A61L3* | 9140-0237 | 2 | 1 | INDUCTOR RF-CH-MLD 200UH 5% .166DX.385LG | 28480 | 9140-0237 |
| A61R1 | 1810-0329 | 6 | 5 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |
| A61R2 | 1810-0329 | 6 | 6 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |
| A61R3 | 1810-0329 | 6 | 6 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |
| A61R4 | 1810-0329 | 6 | 6 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |
| A61R5 | 1810-0329 | 6 | 6 | NETWORK-RES 10-SIP7.5K OHM X 9 | 01121 | 210A752 |
| A61R6 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A61R7 | 0683-7505 | 2 | 2 | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| A61R8 | 0683-7505 | 2 | 2 | RESISTOR 75 5% .25W FC TC=-400/+500 | 01121 | CB7505 |
| A61R9 | 0757-3280 | 3 | 1 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A61R10 | 0150-3375 | 5 | 1 | RESISTOR-ZERO OHMS 22 AWC LEAD DIA | 28480 | 0150-3375 |
| A61U1 | 1820-2176 | 6 | 1 | IC MICROPROC NMOS 8-BIT | 28480 | 1820-2176 |
| A61U1 | 1200-0659 | 2 | 1 | SOCKET-IC 40-CONT DIP-SLDR | 28480 | 1200-0659 |
| A61U2 | 1826-0759 | 4 | 4 | IC UART TTL QUAD | 01295 | MC3446P |
| A61U3 | 1826-0759 | 4 | 4 | IC UART TTL QUAD | 01295 | MC3446P |
| A61U4 | 1826-0759 | 4 | 4 | IC UART TTL QUAD | 01295 | MC3446P |
| A61U5 | 1826-0759 | 4 | 4 | IC UART TTL QUAD | 01295 | MC3446P |
| A61U6 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U7 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U8 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U9 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U10 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U11 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U12 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U13 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| A61U14 | 1820-1491 | 6 | 2 | IC BFR TTL LS NON-INV HEX 1-INP | 01295 | SN74LS367AN |
| A61U15 | 1820-1491 | 6 | 6 | IC BFR TTL LS NON-INV HEX 1-INP | 01295 | SN74LS367AN |
| A61U16 | 1820-1199 | 1 | 1 | IC INV TTL LS HEX 1-INP | 01295 | SN74LS04N |
| A61U17 | 1820-1144 | 6 | 1 | IC GATE TTL LS NOR QUAD 2-INP | 01295 | SN74LS02N |
| A61U18 | 1820-1201 | 6 | 2 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A61U19 | 1820-1197 | 9 | 1 | IC GATE TTL LS NAND QUAD 2-INP | 01295 | SN74LS00N |
| A61U20 | 1820-1201 | 6 | 6 | IC GATE TTL LS AND QUAD 2-INP | 01295 | SN74LS08N |
| A61U21 | 1820-1730 | 6 | 3 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A61U22 | 1820-1730 | 6 | 6 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A61U23 | 1820-1730 | 6 | 6 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A61U24 | 1820-1997 | 7 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG PRL-IN | 01295 | SN74LS374N |
| A61U25 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| A61U26 | 1820-1759 | 9 | 1 | IC BFR TTL LS NON-INV OCTL | 27014 | DM81LS97N |
| A61U27 | 1820-1492 | 7 | 1 | IC BFR TTL LS INV HEX 1-INP | 01295 | SN74LS369AN |
| A61U28 | 1820-1195 | 7 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS175N |
| A61U29 | 1818-1530 | 9 | 1 | IC NMOS 16384 (16K) ROM 450-NS 3-S | 33297 | EA0316EPIC MASKED |
| A61U29 | 1200-0658 | 1 | 1 | SOCKET-IC 24-CONT DIP-SLDR | 28480 | 1200-0658 |
| A61U30 | 1820-1212 | 9 | 1 | IC FF TTL LS J-K NEG-EDGE-TRIG | 01295 | SN74LS112AN |
| A61U31 | 1826-0759 | 9 | 9 | IC COMPARATOR 6P QUAD 14-DIP-C PKG | 04713 | LM339J |
| | 1200-0539 | 7 | 2 | SOCKET-IC 10-CONT DIP DIP-SLDR | 28480 | 1200-0539 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|---|----------|-----------------|
| A62 | 03586-66562 | 6 | 1 | HP INTERFACE EUS-SUB PC | 28400 | 03586-66562 |
| A62J1 | 1251-5768 | 1 | 1 | CONNECTOR 24-PIN F AMP CHAMP | 28480 | 1251-5768 |
| A62S1 | 3101-2215 | 2 | 1 | SWITCH-RKR DIP-RKR-ASSY 7-1A .05A 30VDC | 28480 | 3101-2215 |
| | 8120-2887 | 9 | 1 | CABLE ASSY-HP-IB | 28480 | 8120-2887 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A70 | 03506-66570 | 6 | 1 | IMPAIRMENTS-R (3506B) | 28400 | 03506-66570 |
| A70C1 | 0160-3024 | 4 | 4 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28400 | 0160-3024 |
| A70C2 | 0160-3024 | 4 | 4 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28400 | 0160-3024 |
| A70C4 | 0160-2130 | 1 | 2 | CAPACITOR-FXD 865PF +-1% 100VDC MICA | 28400 | 0160-2130 |
| A70C5 | 0160-2130 | 1 | 2 | CAPACITOR-FXD 865PF +-1% 100VDC MICA | 28400 | 0160-2130 |
| A70C6 | 0160-0163 | 4 | 4 | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM20F4751F0300WV1CR |
| A70C7 | 0160-0163 | 4 | 4 | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM23F4751F0300WV1CR |
| A70C8 | 0160-0163 | 4 | 4 | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM26F4751F0300WV1CR |
| A70C9 | 0160-0163 | 4 | 4 | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM20F4751F0300WV1CR |
| A70C10 | 0160-3024 | 4 | 4 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28400 | 0160-3024 |
| A70C11 | 0160-3024 | 4 | 4 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28400 | 0160-3024 |
| A70C30 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C31 | 0160-3337 | 2 | 3 | CAPACITOR-FXD 10PF +-10% 50VDC CER 0+-30 | 28400 | 0160-3337 |
| A70C32 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C33 | 0160-2585 | 0 | 1 | CAPACITOR-FXD 2000PF +-1% 100VDC MICA | 28400 | 0160-2585 |
| A70C34 | 0160-3337 | 2 | 3 | CAPACITOR-FXD 10PF +-10% 50VDC CER 0+-30 | 28400 | 0160-3337 |
| A70C35 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C36 | 0160-3337 | 2 | 3 | CAPACITOR-FXD 10PF +-10% 50VDC CER 0+-30 | 28400 | 0160-3337 |
| A70C37 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C38 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C60 | 0180-0309 | 4 | 2 | CAPACITOR-FXD 4.7UF +-20% 10VDC TA | 56269 | 150D475X0010A2 |
| A70C61 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C62 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C63 | 0180-0309 | 4 | 2 | CAPACITOR-FXD 4.7UF +-20% 10VDC TA | 56269 | 150D475X0010A2 |
| A70C64 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF +-10% 15VDC TA | 56269 | 150D226X9015B2 |
| A70C65 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C66 | 0160-3847 | 9 | 23 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C67 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28400 | 0160-2306 |
| A70C68 | 0160-0191 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM15E56J0300WV1CR |
| A70C69 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28400 | 0160-0127 |
| A70C70 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 300VDC MICA | 28400 | 0160-2204 |
| A70C71 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C72 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C73 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C74 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C75 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C76 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C77 | 0180-0374 | 3 | 5 | CAPACITOR-FXD 10UF +-10% 20VDC TA | 56269 | 150D106X9020R2 |
| A70C80 | 0160-4557 | 8 | 4 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC34X7R104H050A |
| A70C82 | 0180-0197 | 8 | 2 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56269 | 150D225X9020A2 |
| A70C83 | 0160-3787 | 6 | 1 | CAPACITOR-FXD 1UF +-10% 50VDC MET-POLYC | 28400 | 0160-3787 |
| A70C84 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C85 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-80-20% 50VDC CER | 28400 | 0160-4571 |
| A70C86 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C87 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C88 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C89 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C91 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C92 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C93 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C94 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C95 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C96 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C97 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C99 | 0160-4557 | 0 | 9 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC34X7R104H050A |
| A70C110 | 0160-2587 | 2 | 2 | CAPACITOR-FXD 4000PF +-1% 100VDC MICA | 28400 | 0160-2587 |
| A70C111 | 0160-2587 | 2 | 2 | CAPACITOR-FXD 4000PF +-1% 100VDC MICA | 28400 | 0160-2587 |
| A70C112 | 0160-3939 | 0 | 1 | CAPACITOR-FXD 1000PF +-1% 100VDC MICA | 28400 | 0160-3939 |
| A70C113 | 0160-3046 | 0 | 1 | CAPACITOR-FXD 250PF +-1% 100VDC MICA | 28400 | 0160-3046 |
| A70C114 | 0160-3548 | 7 | 7 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28400 | 0160-3548 |
| A70C115 | 0160-4835 | 7 | 2 | CAPACITOR-FXD .1UF +-10% 50VDC CER | 28400 | 0160-4835 |
| A70C116 | 0160-4835 | 7 | 2 | CAPACITOR-FXD .1UF +-10% 50VDC CER | 28400 | 0160-4835 |
| A70C117 | 0180-0197 | 8 | 8 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56269 | 150D225X9020A2 |
| A70C118 | 0160-3587 | 4 | 2 | CAPACITOR-FXD 2UF +-10% 330VAC(RMS) PPR | 28400 | 0160-3587 |
| A70C119 | 0160-3587 | 4 | 2 | CAPACITOR-FXD 2UF +-10% 330VAC(RMS) PPR | 28400 | 0160-3587 |
| A70C130 | 0160-2671 | 5 | 2 | CAPACITOR-FXD .1UF +-5% 80VDC POLYE | 28400 | 0160-2671 |
| A70C131 | 0160-2671 | 5 | 2 | CAPACITOR-FXD .1UF +-5% 80VDC POLYE | 28400 | 0160-2671 |
| A70C133 | 0160-3847 | 9 | 1 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C134 | 0180-0291 | 3 | 1 | CAPACITOR-FXD 1UF +-10% 35VDC TA | 56269 | 150D105X9035A2 |
| A70C136 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |
| A70C138 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28400 | 0160-3847 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A70C139 | 0160-3847 | 7 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C140 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C141 | 0140-0172 | 5 | 1 | CAPACITOR-FXD 3300PF +-1% 100VDC MICA | 72136 | DM12F302F0100WV1CR |
| A70C142 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C143 | 0160-3936 | 7 | 1 | CAPACITOR-FXD 700PF +-1% 100VDC MICA | 28480 | 0160-3936 |
| A70C144 | 0160-0341 | 2 | 1 | CAPACITOR-FXD 640PF +-1% 360VDC MICA | 28480 | 0160-0341 |
| A70C145 | 0160-4463 | 7 | 1 | CAPACITOR-FXD .1UF +-1% 50VDC MET-POLYCO | 28480 | 0160-4463 |
| A70C146 | 0180-0374 | 3 | | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020R2 |
| A70C147 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C148 | 0180-0374 | 3 | | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020R2 |
| A70C150 | 0180-0374 | 3 | | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56269 | 150D106X9020R2 |
| A70C151 | 0180-0374 | 3 | | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020R2 |
| A70C160 | 0160-4801 | 7 | 2 | CAPACITOR-FXD 100PF +-5% 100VDC CER | 28480 | 0160-4801 |
| A70C161 | 0160-4801 | 7 | | CAPACITOR-FXD 100PF +-5% 100VDC CER | 28480 | 0160-4801 |
| A70C162 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C163 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A70C164 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A70C165 | 0160-4814 | 2 | 1 | CAPACITOR-FXD 150PF +-5% 100VDC CER | 28480 | 0160-4814 |
| A70C166 | 0160-4822 | 2 | 1 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A70C167 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C170 | 0180-0375 | 4 | 3 | CAPACITOR-FXD 68UF+-10% 20VDC TA | 56269 | 150D066X9020R2 |
| A70C171 | 0180-0375 | 4 | | CAPACITOR-FXD 68UF+-10% 20VDC TA | 56289 | 150D066X9020R2 |
| A70C172 | 0180-0375 | 4 | | CAPACITOR-FXD 68UF+-10% 20VDC TA | 56269 | 150D066X9020R2 |
| A70CR1 | 1901-0050 | 3 | 11 | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR2 | 1902-0040 | 1 | 1 | DIODE-ZNR 6.81V 5% DO-35 PD=.4W | 28480 | 1902-0040 |
| A70CR3 | 1901-0033 | 2 | 1 | DIODE-GEN PRP 180V 200MA DO-7 | 28480 | 1901-0033 |
| A70CR4 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR5 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR8 | 1901-0050 | 0 | 1 | DIODE-SM SIG SCHOTTKY | 28480 | 1901-0050 |
| A70CR9 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR10 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR11 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR12 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR13 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR14 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR15 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR16 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR19 | 1902-3104 | 6 | 1 | DIODE-ZNR 5.62V 5% DO-35 PD=.4W | 28480 | 1902-3104 |
| A70E1 | 1790-0792 | 9 | 1 | OPTO-ISOLATOR LED-PCNDCT IF=40MA-MAX | 18178 | VT1503/2 |
| A70L1 | 9100-1631 | 8 | 3 | INDUCTOR RF-CH-MLD 560H 5% .166DX.385LG | 28480 | 9100-1631 |
| A70L2 | 9100-1631 | 8 | | INDUCTOR RF-CH-MLD 560H 5% .166DX.385LG | 28480 | 9100-1631 |
| A70L3 | 9100-1631 | 8 | | INDUCTOR RF-CH-MLD 560H 5% .166DX.385LG | 28480 | 9100-1631 |
| A70Q1 | 1854-0071 | 7 | 3 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q3 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q4 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q5 | 1854-0215 | 1 | 2 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A70Q6 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A70R1 | 0698-7371 | 1 | 2 | RESISTOR 20.605K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-20605R-B |
| A70R2 | 0698-7371 | 1 | | RESISTOR 20.695K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-20695R-B |
| A70R3 | 0698-7365 | 3 | 1 | RESISTOR 13.394K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-13394R-B |
| A70R4 | 0757-0449 | 6 | 6 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R5 | 0698-7372 | 2 | 3 | RESISTOR 108.94K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-108941-B |
| A70R6 | 0698-7376 | 6 | 1 | RESISTOR 11.397K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-11397R-B |
| A70R7 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R8 | 0698-7372 | 2 | | RESISTOR 108.94K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-108941-B |
| A70R9 | 0698-7366 | 4 | 2 | RESISTOR 109.64K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-109641-B |
| A70R10 | 0698-7366 | 4 | | RESISTOR 109.64K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-109641-B |
| A70R11 | 0698-7367 | 5 | 1 | RESISTOR 78.028K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-78028R-B |
| A70R12 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R13 | 0698-7368 | 6 | 2 | RESISTOR 36.901K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-36901R-B |
| A70R14 | 0698-7370 | 0 | 1 | RESISTOR 17.579K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-17579R-B |
| A70R15 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R16 | 0698-7368 | 6 | | RESISTOR 36.901K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-36901R-B |
| A70R17 | 0698-7375 | 5 | 2 | RESISTOR 28.64K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-28641-B |
| A70R18 | 0698-7375 | 5 | | RESISTOR 28.64K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-28641-B |
| A70R20 | 0698-3519 | 1 | 1 | RESISTOR 12.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1242-F |
| A70R21 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R22 | 0757-0442 | 9 | 17 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R23 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R24 | 0757-0450 | 9 | 1 | RESISTOR 22.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2212-F |
| A70R26 | 0698-7372 | 2 | | RESISTOR 108.94K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-108941-B |
| A70R30 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R31 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R32 | 0698-4480 | 7 | 3 | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R33 | 2100-3273 | 1 | 2 | RESISTOR-TRKR 2K 10% C 510E ADJ 1-TRN | 28480 | 2100-3273 |
| A70R34 | 0698-3156 | 2 | 2 | RESISTOR 14.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1472-F |
| A70R35 | 0698-4425 | 4 | 2 | RESISTOR 37.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3742-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|------------------|
| A70R36 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R37 | 0698-4480 | 7 | | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R38 | 0698-3268 | 7 | 2 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A70R39 | 0698-4503 | 5 | 1 | RESISTOR 66.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6652-F |
| A70R40 | 2100-3207 | 1 | 2 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3207 |
| A70R41 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R42 | 0698-4480 | 7 | | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R43 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R44 | 0698-3156 | 2 | | RESISTOR 14.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1472-F |
| A70R45 | 2100-3273 | 1 | | RESISTOR-TRMR 2K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3273 |
| A70R46 | 0698-4495 | 4 | | RESISTOR 37.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3742-F |
| A70R47 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R48 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R49 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R50 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R51 | 0757-0451 | 0 | 1 | RESISTOR 24.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2432-F |
| A70R52 | 0757-0434 | 2 | 1 | RESISTOR 3.45K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3651-F |
| A70R53 | 0757-0280 | 3 | 2 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A70R60 | 0757-0447 | 4 | 1 | RESISTOR 16.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1622-F |
| A70R61 | 0683-2715 | 6 | 1 | RESISTOR 270 5% .25W FC TC=-400/+600 | 01121 | CR2715 |
| A70R62 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R63 | 0757-0465 | 6 | 3 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R64 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A70R66 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CR4725 |
| A70R67 | 0683-2435 | 7 | 2 | RESISTOR 24K 5% .25W FC TC= 400/+800 | 01121 | CR2435 |
| A70R68 | 0683-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CR1025 |
| A70R69 | 0698-4486 | 3 | 1 | RESISTOR 24.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2492-F |
| A70R70 | 2100-3054 | 6 | 1 | RESISTOR-TRMR 50K 10% C SIDE-ADJ 17-TRN | 02111 | 43P503 |
| A70R71 | 0683-2035 | 3 | 4 | RESISTOR 20K 5% .25W FC TC= 400/+800 | 01121 | CR2035 |
| A70R72 | 2100-3350 | 5 | 2 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A70R73 | 0811-1780 | 6 | 1 | RESISTOR 1K 5% .25W PWM TC=+3400+ 300 | 54294 | VA12-1/4-1031-J |
| A70R74 | 0698-3518 | 0 | 1 | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A70R75 | 0683-1035 | 1 | 4 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CR1035 |
| A70R76 | 0698-7332 | 4 | 1 | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A70R77 | 0757-0433 | 8 | 1 | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A70R78 | 0683-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CR2025 |
| A70R79 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC= 400/+500 | 01121 | CR1005 |
| A70R80 | 0683-1045 | 3 | 5 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CR1045 |
| A70R81 | 0683-1545 | 8 | 2 | RESISTOR 150K 5% .25W FC TC=-800/+900 | 01121 | CR1545 |
| A70R82 | 0698-3155 | 1 | 1 | RESISTOR 4.64K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4641-F |
| A70R83 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A70R86 | 0683-1545 | 8 | | RESISTOR 150K 5% .25W FC TC=-800/+900 | 01121 | CR1545 |
| A70R87 | 0698-4459 | 6 | 1 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R88 | 0757-0422 | 5 | 1 | RESISTOR 909 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-9092-F |
| A70R89 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R90 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R91 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R92 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R93 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R96 | 0683-5125 | 8 | 3 | RESISTOR 5.1K 5% .25W FC TC=-460/+700 | 01121 | CR5125 |
| A70R97 | 2100-3356 | 1 | 1 | RESISTOR-TRMR 200K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3356 |
| A70R98 | 0698-4537 | 5 | 1 | RESISTOR 357K 1% .125W F TC=0+-100 | 28480 | 0698-4537 |
| A70R100 | 0757-0273 | 4 | 1 | RESISTOR 3.01K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3011-F |
| A70R101 | 0698-3497 | 4 | 1 | RESISTOR 6.04K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A70R103 | 0683-7515 | 4 | 1 | RESISTOR 750 5% .25W FC TC=-400/+600 | 01121 | CR7515 |
| A70R110 | 0698-4474 | 9 | 2 | RESISTOR 8.45K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8451-F |
| A70R111 | 0698-4474 | 9 | | RESISTOR 8.45K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8451-F |
| A70R112 | 0757-0272 | 3 | 1 | RESISTOR 52.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5232-F |
| A70R113 | 0698-4504 | 6 | | RESISTOR 49.0K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4902-F |
| A70R114 | 0698-4501 | 3 | 1 | RESISTOR 59K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5902-F |
| A70R115 | 0757-0466 | 7 | 2 | RESISTOR 110K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1103-F |
| A70R116 | 0698-4497 | 6 | 1 | RESISTOR 48.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4872-F |
| A70R117 | 0698-3484 | 9 | 1 | RESISTOR 6.65K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6651-F |
| A70R118 | 0698-4488 | 5 | 1 | RESISTOR 26.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2672-F |
| A70R119 | 0698-5916 | 6 | 1 | RESISTOR 1.25M 1% .5W F TC=0+-100 | 28480 | 0698-5916 |
| A70R120 | 0757-0466 | 7 | | RESISTOR 110K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1103-F |
| A70R121 | 0757-0431 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101 F |
| A70R122 | 0698-3228 | 9 | 2 | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A70R123 | 0757-0447 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R124 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CR2035 |
| A70R125 | 2100-3358 | 3 | 1 | RESISTOR-TRMR 1M 20% C SIDE-ADJ 1-TRN | 28480 | 2100-3358 |
| A70R126 | 0757-0123 | 3 | 1 | RESISTOR 34.8K 1% .125W F TC=0+-100 | 28480 | 0757-0123 |
| A70R130 | 0683-1555 | 0 | 1 | RESISTOR 1.5M 5% .25W FC TC=-900/+1100 | 01121 | CR1555 |
| A70R131 | 0698-4519 | 3 | 1 | RESISTOR 146K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1463-F |
| A70R132 | 0757-0486 | 1 | 1 | RESISTOR 750K 1% .125W F TC=0+-100 | 28480 | 0757-0486 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A70R133 | 2100-3357 | 2 | 1 | RESISTOR-TRMR 500K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3357 |
| A70R134 | 0757-0124 | 4 | 1 | RESISTOR 39.2K 1% .125W F TC=0+-100 | 28480 | 0757-0124 |
| A70R135 | 0757-0349 | 5 | 1 | RESISTOR 22.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2262-F |
| A70R136 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R137 | 0683-5125 | 8 | 1 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A70R138 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70R139 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R140 | 0757-0270 | 1 | 1 | RESISTOR 249K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2493-F |
| A70R141 | 0698-3148 | 2 | 1 | RESISTOR 102K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1023-F |
| A70R142 | 0698-3456 | 5 | 1 | RESISTOR 287K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2873-F |
| A70R143 | 0698-4524 | 0 | 1 | RESISTOR 174K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1743-F |
| A70R144* | 0698-4504 | 6 | 2 | RESISTOR 69.0K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6902-F |
| A70R144* | 0698-4535 | 7 | 1 | RESISTOR 71.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7152-F |
| A70R144* | 0757-0461 | 2 | 1 | RESISTOR 68.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6812-F |
| A70R145 | 0698-4498 | 7 | 1 | RESISTOR 53.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5362-F |
| A70R146 | 2100-3207 | 1 | 1 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3207 |
| A70R147 | 0683-2435 | 7 | 1 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A70R148 | 0698-4510 | 2 | 1 | RESISTOR 137K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1373-F |
| A70R149 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R150 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R151 | 0757-0465 | 6 | 1 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R152 | 0698-8353 | 1 | 2 | RESISTOR 806K 1% .125W F TC=0+-100 | 28480 | 0698-8353 |
| A70R153 | 0698-4539 | 7 | 2 | RESISTOR 402K 1% .125W F TC=0+-100 | 28480 | 0698-4539 |
| A70R154 | 0698-8353 | 1 | 1 | RESISTOR 806K 1% .125W F TC=0+-100 | 28480 | 0698-8353 |
| A70R155 | 0698-4539 | 7 | 1 | RESISTOR 402K 1% .125W F TC=0+-100 | 28480 | 0698-4539 |
| A70R156 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R157 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A70R158 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A70R159 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70R160 | 0698-3450 | 9 | 2 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A70R161 | 0698-3450 | 9 | 2 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A70R162 | 0757-0161 | 0 | 2 | RESISTOR 664 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-664R-F |
| A70R163 | 0698-3493 | 0 | 1 | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A70R164 | 0757-0161 | 0 | 1 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A70R165 | 0698-4484 | 1 | 1 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A70R166 | 0698-4123 | 5 | 1 | RESISTOR 499 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-499R-F |
| A70R167 | 0757-0272 | 0 | 1 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A70R171 | 0698-3268 | 7 | 1 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A70R172 | 0698-4494 | 3 | 1 | RESISTOR 35.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3572-F |
| A70R173 | 0698-8344 | 0 | 1 | RESISTOR 604K 1% .125W F TC=0+-100 | 28480 | 0698-8344 |
| A70R181 | 2100-3350 | 5 | 1 | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A70R182 | 0698-3228 | 9 | 1 | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A70R183 | 0757-0444 | 1 | 1 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A70R188 | 0757-0403 | 2 | 1 | RESISTOR 121 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-121R-F |
| A70R189 | 0683-2035 | 3 | 1 | RESISTOR 29K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A70R190 | 0683-5125 | 8 | 1 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A70R191 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70R192 | 0683-1035 | 1 | 1 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70TL1 | 1251-4022 | 6 | 1 | CONNECTOR 3 PIN M POST TYPE | 28480 | 1251-4022 |
| A70TL1 | 1258-0141 | 8 | 1 | JUMPER RCM | 28480 | 1258-0141 |
| A70U1 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U2 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U3 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U4 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U5 | 1826-0111 | 7 | 9 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U6 | 1826-0111 | 7 | 7 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U7 | 1826-0111 | 7 | 7 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U8 | 1826-0217 | 4 | 7 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U9 | 1826-0111 | 7 | 7 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U10 | 1826-0111 | 7 | 7 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U11 | 1826-0043 | 4 | 2 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A70U12 | 1826-0109 | 3 | 1 | IC OP AMP WB TO-99 PKG | 34371 | HA2-2625-RC593 |
| A70U14 | 1820-1433 | 6 | 2 | IC SNF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A70U15 | 1820-1433 | 6 | 2 | IC SNF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A70U16 | 1820-1730 | 6 | 2 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A70U16 | 1260-0700 | 4 | 2 | SOCKET-IC 28 CONT DIP DIP-SLDR | 28480 | 1260-0700 |
| A70U17 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A70U17 | 1200-0700 | 4 | 1 | SOCKET-IC 28 CONT DIP DIP-SLDR | 28480 | 1200-0700 |
| A70U18 | 1820-1934 | 2 | 1 | IC CONV B R-D/A 16-DIP-C PKG | 36665 | DAC-08EQ |
| A70U19 | 1826-0026 | 3 | 1 | IC COMPARATOR PRCN TO-99 PKG | 01295 | LM311L |
| A70U20 | 1820-1422 | 3 | 1 | IC MV TTL LS MONOSTEL RETRTG | 01295 | SN74LS122N |
| A70U21 | 1820-1194 | 6 | 1 | IC CNTR TTL LS BIN UP/DOWN SYNCHRO | 01295 | SN74LS193N |
| A70U22 | 1826-0421 | 2 | 1 | IC CONV RMS/DC 14-DIP-C PKG | 24355 | AZ536AJ |
| A70U23 | 1826-0111 | 7 | 1 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U24 | 1826-0111 | 7 | 1 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U25 | 1826-0476 | 7 | 3 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A70U26 | 1826-0138 | 8 | 1 | IC COMPARATOR GP QUAD 14-DIP-P PKG | 01295 | LM339N |
| A70U27 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U28 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U29 | 1826-0547 | 3 | 2 | IC OP AMP LOW-BIAS-H-IMPD DUAL 8-DIP-P | 01295 | TL072ACP |
| A70U30 | 1826-0547 | 3 | | IC OP AMP LOW-BIAS-H-IMPD DUAL 8-DIP-P | 01295 | TL072ACP |
| A70U31 | 1820-1180 | 8 | 1 | IC PL LOOP 16-DIP-P PKG | 3L585 | CD4646AF |
| A70U35 | 1820-0416 | 3 | 1 | VOID/CANCELLED | 28480 | 1820-0416 |
| A70U36 | 1826-0476 | 7 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A70U37 | 1826-0476 | 7 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A70U38 | 1826-0417 | 6 | 1 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF13333D |
| A70U39 | 1826-0217 | 4 | | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U40 | 1820-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-INP | 01295 | SN74LS10N |
| A70U41 | 1826-0043 | 4 | | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A70U42 | 1826-0477 | 8 | 2 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL610CP |
| A70U43 | 1826-0477 | 8 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL610CP |
| A70Y1 | 0410-1212 | 9 | 1 | CRYSTAL-QUARTZ 1.66250 MHZ | 28480 | 0410-1212 |
| | 1200-0638 | 7 | 1 | SOCKET-IC 14-CONT DIP DIP-SLDR | 28480 | 1200-0638 |
| | 4040-0748 | 3 | 1 | EXTR-PC BD BLK POLYC .062-BD-THKNS | 28480 | 4040-0748 |
| | 4040-0756 | 3 | 1 | EXTR-PC BD WHT POLYC .062-BD-THKNS | 28480 | 4040-0756 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|---------------------|
| A70 | 03586-66571 | 7 | 1 | IMPAIRMENTS-A (3586A) | 28480 | 03586-66571 |
| A70C1 | 0160-3024 | 4 | 6 | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C2 | 0160-3024 | 4 | | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C4 | 0140-0163 | 4 | 2 | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM20F4751F0300WV1CR |
| A70C5 | 0140-0163 | 4 | | CAPACITOR-FXD 4751PF +-1% 300VDC MICA | 72136 | DM20F4751F0300WV1CR |
| A70C6 | 0140-0184 | 9 | 2 | CAPACITOR-FXD 8200PF +-1% 100VDC MICA | 72136 | DM20F820F0100WV1CR |
| A70C7 | 0140-0184 | 9 | | CAPACITOR-FXD 8200PF +-1% 100VDC MICA | 72136 | DM20F820F0100WV1CR |
| A70C8 | 0160-3024 | 4 | | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C9 | 0160-3024 | 4 | | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C10 | 0160-3024 | 4 | | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C11 | 0160-3024 | 4 | | CAPACITOR-FXD 1700PF +-1% 100VDC MICA | 28480 | 0160-3024 |
| A70C30 | 0160-3548 | 7 | 9 | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C31 | 0160-3337 | 2 | 2 | CAPACITOR-FXD 10PF +-10% 50VDC CER 0+-30 | 28480 | 0160-3337 |
| A70C32 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C33 | 0160-2585 | 0 | 1 | CAPACITOR-FXD 2000PF +-1% 100VDC MICA | 28480 | 0160-2585 |
| A70C34 | 0160-3337 | 2 | | CAPACITOR-FXD 10PF +-10% 50VDC CER 0+-30 | 28480 | 0160-3337 |
| A70C35 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C36 | 0160-3874 | 2 | 1 | CAPACITOR-FXD 10PF +-5PF 200VDC CER | 28480 | 0160-3874 |
| A70C37 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C38 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C60 | 0180-0309 | 4 | 2 | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A70C61 | 0160-4571 | 8 | 6 | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C62 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C63 | 0180-0309 | 4 | | CAPACITOR-FXD 4.7UF+-20% 10VDC TA | 56289 | 150D475X0010A2 |
| A70C64 | 0180-0228 | 6 | 1 | CAPACITOR-FXD 22UF+-10% 15VDC TA | 56289 | 150D226X9015B2 |
| A70C65 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C66 | 0160-3847 | 9 | 23 | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C67 | 0160-2306 | 3 | 1 | CAPACITOR-FXD 27PF +-5% 300VDC MICA | 28480 | 0160-2306 |
| A70C68 | 0140-0171 | 8 | 1 | CAPACITOR-FXD 56PF +-5% 300VDC MICA | 72136 | DM156560J0300WV1CR |
| A70C69 | 0160-0127 | 2 | 1 | CAPACITOR-FXD 1UF +-20% 25VDC CER | 28480 | 0160-0127 |
| A70C70 | 0160-2204 | 0 | 1 | CAPACITOR-FXD 100PF +-5% 330VDC MICA | 28480 | 0160-2204 |
| A70C71 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C72 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C73 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C74 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C75 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C76 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C77 | 0180-0374 | 3 | 5 | CAPACITOR-FXD 10UF+-10% 20VDC TA | 56289 | 150D106X9020E2 |
| A70C80 | 0160-4557 | 0 | 4 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A70C82 | 0180-0197 | 8 | 2 | CAPACITOR-FXD 2.2UF+-10% 26VDC TA | 56289 | 150D226X9020A2 |
| A70C83 | 0160-3787 | 6 | 1 | CAPACITOR-FXD 1UF +-10% 50VDC MET-POLY | 28480 | 0160-3787 |
| A70C84 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C85 | 0160-4571 | 8 | | CAPACITOR-FXD .1UF +-00-20% 50VDC CER | 28480 | 0160-4571 |
| A70C86 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C87 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C88 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C89 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C91 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C92 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C93 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C94 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C95 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C96 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C97 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C99 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC04X7R104M050A |
| A70C110 | 0160-2587 | 2 | 2 | CAPACITOR-FXD 4600PF +-1% 100VDC MICA | 28480 | 0160-2587 |
| A70C111 | 0160-2587 | 2 | | CAPACITOR-FXD 4600PF +-1% 100VDC MICA | 28480 | 0160-2587 |
| A70C112 | 0160-3939 | 0 | 1 | CAPACITOR-FXD 1400PF +-1% 100VDC MICA | 28480 | 0160-3939 |
| A70C113 | 0160-3046 | 0 | 1 | CAPACITOR-FXD 250PF +-1% 100VDC MICA | 28480 | 0160-3046 |
| A70C114 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C115 | 0160-4835 | 7 | 2 | CAPACITOR-FXD .1UF +-10% 50VDC CER | 28480 | 0160-4835 |
| A70C116 | 0160-4835 | 7 | | CAPACITOR-FXD .1UF +-10% 50VDC CER | 28480 | 0160-4835 |
| A70C117 | 0180-0197 | 8 | | CAPACITOR-FXD 2.2UF+-10% 26VDC TA | 56289 | 150D226X9020A2 |
| A70C118 | 0160-3507 | 4 | 2 | CAPACITOR-FXD 20F +-10% 330VAC(RMS) PPR | 28480 | 0160-3507 |
| A70C119 | 0160-3507 | 4 | | CAPACITOR-FXD 1UF +-10% 330VAC(RMS) PPR | 28480 | 0160-3507 |
| A70C130 | 0160-2671 | 5 | 2 | CAPACITOR-FXD .1UF +-5% 80VDC POLY | 28480 | 0160-2671 |
| A70C131 | 0160-2671 | 5 | | CAPACITOR-FXD .1UF +-5% 80VDC POLY | 28480 | 0160-2671 |
| A70C133 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C134 | 0180-0291 | 3 | 1 | CAPACITOR-FXD 1UF+-10% 35VDC TA | 56289 | 150D175X9935A2 |
| A70C136 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C138 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +-100-0% 50VDC CER | 28480 | 0160-3847 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|--------------------|
| A70C139 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 0160-3847 |
| A70C140 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +1% 100VDC MICA | 28480 | 0160-3548 |
| A70C141 | 0149-0172 | 5 | 1 | CAPACITOR-FXD 3000PF +-1% 100VDC MICA | 72136 | 0M12F302F1000VW1CR |
| A70C142 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C143 | 0160-3936 | 7 | 1 | CAPACITOR-FXD 7000PF +-1% 100VDC MICA | 28480 | 0160-3936 |
| A70C144 | 0160-0341 | 2 | 1 | CAPACITOR-FXD 640PF +-1% 300VDC MICA | 28480 | 0160-0341 |
| A70C145 | 0160-4463 | 7 | 1 | CAPACITOR-FXD .1UF +-1% 50VDC MET-POLY | 28480 | 0160-4463 |
| A70C146 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D166X9020B2 |
| A70C147 | 0160-3548 | 7 | | CAPACITOR-FXD .01UF +-1% 100VDC MICA | 28480 | 0160-3548 |
| A70C148 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D166X9020B2 |
| A70C150 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D166X9020B2 |
| A70C151 | 0180-0374 | 3 | | CAPACITOR-FXD 100F+-10% 20VDC TA | 56289 | 150D166X9020B2 |
| A70C160 | 0160-4801 | 7 | 2 | CAPACITOR-FXD 100PF + 5% 100VDC CER | 28480 | 0160-4801 |
| A70C161 | 0160-4801 | 7 | | CAPACITOR-FXD 100PF +5% 100VDC CER | 28480 | 0160-4801 |
| A70C162 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C163 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC64X7R104M50A |
| A70C164 | 0160-4557 | 0 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 16299 | CAC64X7R104M50A |
| A70C165 | 0160-4814 | 2 | 1 | CAPACITOR-FXD 150PF +-5% 100VDC CER | 28480 | 0160-4814 |
| A70C166 | 0160-4822 | 2 | 1 | CAPACITOR-FXD 1000PF +-5% 100VDC CER | 28480 | 0160-4822 |
| A70C167 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A70C170 | 0180-0375 | 4 | 3 | CAPACITOR-FXD 600F+-10% 20VDC TA | 56289 | 150D686X9020B2 |
| A70C171 | 0180-0375 | 4 | | CAPACITOR-FXD 600F+-10% 20VDC TA | 56289 | 150D686X9020B2 |
| A70C172 | 0180-0375 | 4 | | CAPACITOR-FXD 600F+-10% 20VDC TA | 56289 | 150D686X9020B2 |
| A70CR1 | 1901-0050 | 3 | 11 | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR2 | 1902-0048 | 1 | 1 | DIODE-ZNR 6.81V 5% DO-35 PD=.4W | 28480 | 1902-0048 |
| A70CR3 | 1901-0033 | 2 | 1 | DIODE-GEN PRP 180V 200MA DO-7 | 28480 | 1901-0033 |
| A70CR4 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR5 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR8 | 1901-0050 | 3 | 1 | DIODE-GEN PRP 180V 200MA DO-7 | 28480 | 1901-0050 |
| A70CR9 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR10 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR11 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR12 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR13 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR14 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR15 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR16 | 1901-0050 | 3 | | DIODE-SWITCHING 80V 200MA 2NS DO-35 | 28480 | 1901-0050 |
| A70CR19 | 1902-3104 | 6 | 1 | DIODE-ZNR 5.62V 5% DO-35 PD=.4W | 28480 | 1902-3104 |
| A70E1 | 1990-0792 | 9 | 1 | OPTO-ISOLATOR LED-PCNDCT IF=40MA-MAX | 10178 | VTL503/2 |
| A70L1 | 9100-1631 | 8 | 3 | INDUCTOR RF-CH-MED 50UH 5% .166DX.385LG | 28480 | 9100-1631 |
| A70L2 | 9100-1631 | 8 | | INDUCTOR RF-CH-MED 50UH 5% .166DX.385LG | 28480 | 9100-1631 |
| A70L3 | 9100-1631 | 8 | | INDUCTOR RF-CH-MED 50UH 5% .166DX.385LG | 28480 | 9100-1631 |
| A70Q1 | 1854-0071 | 7 | 3 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q3 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q4 | 1854-0071 | 7 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A70Q5 | 1854-0215 | 1 | 2 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A70Q6 | 1854-0215 | 1 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | 2N3904 |
| A70R1 | 0698-7668 | 9 | 4 | RESISTOR 39.91K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-39911-B |
| A70R2 | 0698-7668 | 9 | | RESISTOR 39.91K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-39911-B |
| A70R3 | 0698-6378 | 6 | 1 | RESISTOR 14.9K .1% .125W F TC=0+-50 | 28480 | 6692-6378 |
| A70R4 | 0757-0449 | 6 | 6 | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R5 | 0698-7673 | 6 | 3 | RESISTOR 49.39K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-49391-B |
| A70R6 | 0698-7674 | 7 | 1 | RESISTOR 13.19K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-13191-B |
| A70R7 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R8 | 0698-7673 | 6 | | RESISTOR 49.39K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-49391-B |
| A70R9 | 0698-7680 | 5 | 2 | RESISTOR 59.41K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-59411-B |
| A70R10 | 0698-7680 | 5 | | RESISTOR 59.41K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-59411-B |
| A70R11 | 0698-7679 | 2 | 1 | RESISTOR 19.41K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-19411-B |
| A70R12 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R13 | 0698-7668 | 9 | | RESISTOR 39.91K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-39911-B |
| A70R14 | 0698-7682 | 7 | 1 | RESISTOR 52.98K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-52981-B |
| A70R15 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R16 | 0698-7668 | 9 | | RESISTOR 39.91K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-39911-B |
| A70R17 | 0698-7675 | 8 | 1 | RESISTOR 24.06K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-24061-B |
| A70R18 | 0698-7670 | 3 | 1 | RESISTOR 23.69K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-23691-B |
| A70R20 | 0757-0443 | 0 | 1 | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A70R21 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R22 | 0757-0442 | 9 | 10 | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R23 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R24 | 0757-0450 | 9 | 1 | RESISTOR 22.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2212-F |
| A70R25 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R26 | 0698-7673 | 6 | | RESISTOR 49.39K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-49391-B |
| A70R30 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R31 | 0757-0442 | 9 | | RESISTOR 10K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1002-F |
| A70R32 | 0698-4480 | 7 | 3 | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R33 | 2100-3273 | 1 | 2 | RESISTOR-TRMR 2K 10% C STDC-ADJ 1-TRN | 28480 | 2100-3273 |
| A70R34 | 0698-3156 | 2 | 2 | RESISTOR 14.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1472-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|------------------|
| A70R35 | 0698-4495 | 4 | 2 | RESISTOR 37.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3742-F |
| A70R36 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1662-F |
| A70R37 | 0698-4480 | 7 | | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R38 | 0698-3260 | 7 | 2 | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A70R39 | 0698-4503 | 5 | 1 | RESISTOR 66.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6652-F |
| A70R40 | 2100-3207 | 1 | 2 | RESISTOR TRMR 5K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3207 |
| A70R41 | 0757-0442 | 7 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R42 | 0698-4480 | 7 | | RESISTOR 15.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1582-F |
| A70R43 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R44 | 0698-3154 | 2 | | RESISTOR 14.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1472-F |
| A70R45 | 2100-3273 | 1 | | RESISTOR-TRMR 2K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3273 |
| A70R46 | 0698-4495 | 4 | | RESISTOR 37.4K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3742-F |
| A70R47 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R48 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R49 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R50 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R51 | 0757-0451 | 0 | 1 | RESISTOR 24.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2432-F |
| A70R52 | 0757-0434 | 9 | 1 | RESISTOR 3.65K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3651-F |
| A70R53 | 0757-0280 | 3 | 2 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A70R60 | 0757-0442 | 4 | 1 | RESISTOR 16.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1622-F |
| A70R61 | 0683-2715 | 6 | 1 | RESISTOR 270 5% .25W FC TC=-400/+600 | 01121 | CR2715 |
| A70R62 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R63 | 0757-0465 | 6 | 3 | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R64 | 0757-0453 | 2 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A70R66 | 0683-4725 | 2 | 1 | RESISTOR 4.7K 5% .25W FC TC= 400/+700 | 01121 | CR4725 |
| A70R67 | 0683-2435 | 7 | 2 | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CR2435 |
| A70R68 | 0693-1025 | 9 | 3 | RESISTOR 1K 5% .25W FC TC= -400/+600 | 01121 | CR1025 |
| A70R69 | 0698-4480 | 3 | 1 | RESISTOR 24.9K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2492-F |
| A70R70 | 2100-3054 | 6 | 1 | RESISTOR-TRMR 50K 10% C SIDE-ADJ 17-TRN | 02111 | 43P503 |
| A70R71 | 0683-2035 | 3 | 4 | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CR2035 |
| A70R72 | 2100-3350 | 5 | 2 | RESISTOR TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A70R73 | 0811-1780 | 6 | 1 | RESISTOR 1K 5% .25W PWR TC=-3400/+360 | 54294 | VA12-1/4-1861-J |
| A70R74 | 0698-3518 | 0 | 1 | RESISTOR 7.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7321-F |
| A70R75 | 0683-1135 | 1 | 4 | RESISTOR 18K 5% .25W FC TC=-400/+700 | 01121 | CR1135 |
| A70R76 | 0698-7332 | 4 | 1 | RESISTOR 1M 1% .125W F TC=0+-100 | 28480 | 0698-7332 |
| A70R77 | 0757-0433 | 8 | 1 | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A70R78 | 0633-2025 | 1 | 1 | RESISTOR 2K 5% .25W FC TC= -400/+700 | 01121 | CR2025 |
| A70R79 | 0683-1805 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CR1805 |
| A70R80 | 0683-1045 | 3 | 5 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CR1045 |
| A70R81 | 0683-1545 | 0 | 2 | RESISTOR 150K 5% .25W FC TC=-800/+900 | 01121 | CR1545 |
| A70R82 | 0698-3155 | 1 | 1 | RESISTOR 4.64K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4641-F |
| A70R83 | 0757-0280 | 3 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A70R84 | 0683-1545 | 8 | | RESISTOR 150K 5% .25W FC TC=-800/+900 | 01121 | CR1545 |
| A70R87 | 0698-4480 | 6 | 1 | RESISTOR 28K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2802-F |
| A70R88 | 0757-0422 | 5 | 1 | RESISTOR 909 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-909R-F |
| A70R89 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R90 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R91 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R92 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R93 | 0757-0442 | 9 | | RESISTOR 18K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1802-F |
| A70R96 | 0683-5125 | 0 | 3 | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CR5125 |
| A70R97 | 2100-3356 | 1 | 1 | RESISTOR-TRMR 200K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3356 |
| A70R98 | 0698-4533 | 1 | 1 | RESISTOR 294K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2943-F |
| A70R100 | 0757-0273 | 4 | 1 | RESISTOR 3.61K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3611-F |
| A70R101 | 0698-3497 | 4 | 1 | RESISTOR 6.34K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A70R103 | 0683-7515 | 4 | 1 | RESISTOR 750 5% .25W FC TC= 400/+600 | 01121 | CR7515 |
| A70R110 | 0698-4474 | 9 | 2 | RESISTOR 8.45K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8451-F |
| A70R111 | 0698-4474 | 9 | | RESISTOR 8.45K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-8451-F |
| A70R112 | 0757-0272 | 3 | 1 | RESISTOR 52.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5232-F |
| A70R113 | 0698-4504 | 6 | | RESISTOR 69.8K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6982-F |
| A70R114 | 0698-4501 | 3 | 1 | RESISTOR 59K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5902-F |
| A70R115 | 0757-0466 | 7 | 2 | RESISTOR 116K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1163-F |
| A70R116 | 0698-4497 | 6 | 1 | RESISTOR 48.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4872-F |
| A70R117 | 0698-3484 | 9 | 1 | RESISTOR 6.65K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6651-F |
| A70R118 | 0698-4468 | 5 | 1 | RESISTOR 26.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2672-F |
| A70R119 | 0698-5914 | 6 | 1 | RESISTOR 1.25M 1% .5W F TC=0+-100 | 28480 | 0698-5914 |
| A70R120 | 0757-0466 | 7 | | RESISTOR 110K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1103-F |
| A70R121 | 0757-0461 | 0 | 1 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| A70R122 | 0698-3228 | 9 | 2 | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A70R123 | 0757-0449 | 6 | | RESISTOR 20K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2002-F |
| A70R124 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC= 400/+800 | 01121 | CR2035 |
| A70R125 | 2100-3359 | 3 | 1 | RESISTOR TRMR 1M 20% C SIDE-ADJ 1-TRN | 28480 | 2100-3359 |
| A70R126 | 0757-0123 | 3 | 1 | RESISTOR 34.8K 1% .125W F TC=0+-100 | 28480 | 0757-0123 |
| A70R130 | 0683-1555 | 0 | 1 | RESISTOR 1.5M 5% .25W FC TC=-900/+1100 | 01121 | CR1555 |
| A70R131 | 0698-4517 | 3 | 1 | RESISTOR 140K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1403-F |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A70R132 | 0757-0486 | 1 | 1 | RESISTOR 753K 1% .125W F TC=0+-100 | 28480 | 0757-0486 |
| A70R133 | 2100-3357 | 2 | 1 | RESISTOR-TRMR 500K 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3357 |
| A70R134 | 0757-0124 | 4 | 1 | RESISTOR 39.2K 1% .125W F TC=0+-100 | 28480 | 0757-0124 |
| A70R135 | 0757-0349 | 5 | 1 | RESISTOR 22.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2262-F |
| A70R136 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R137 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A70R138 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70R139 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R140 | 0757-0270 | 1 | 1 | RESISTOR 249K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2493-F |
| A70R141 | 0698-3148 | 2 | 1 | RESISTOR 102K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1023-F |
| A70R142 | 0698-3456 | 5 | 1 | RESISTOR 287K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2873-F |
| A70R143 | 0698-4523 | 9 | 1 | RESISTOR 169K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1693-F |
| A70R144* | 0698-4504 | 6 | 2 | RESISTOR 69.0K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6902-F |
| A70R144* | 0698-4505 | 7 | 1 | RESISTOR 71.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7152-F |
| A70R144* | 0757-0461 | 2 | 1 | RESISTOR 68.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6812-F |
| A70R145 | 0698-4498 | 7 | 1 | RESISTOR 53.6K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5362-F |
| A70R146 | 2100-3207 | 1 | | RESISTOR-TRMR 5K 10% C SIDE ADJ 1-TRN | 28480 | 2100-3207 |
| A70R147 | 0683-2435 | 7 | | RESISTOR 24K 5% .25W FC TC=-400/+800 | 01121 | CB2435 |
| A70R148 | 0698-4518 | 2 | 1 | RESISTOR 137K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1373-F |
| A70R149 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R150 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R151 | 0757-0465 | 6 | | RESISTOR 100K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1003-F |
| A70R152 | 0698-8353 | 1 | 2 | RESISTOR 800K 1% .125W F TC=0+-100 | 28480 | 0698-8353 |
| A70R153 | 0698-4539 | 7 | 2 | RESISTOR 402K 1% .125W F TC=0+-100 | 28480 | 0698-4539 |
| A70R154 | 0698-8353 | 1 | | RESISTOR 800K 1% .125W F TC=0+-100 | 28480 | 0698-8353 |
| A70R155 | 0698-4539 | 7 | | RESISTOR 402K 1% .125W F TC=0+-100 | 28480 | 0698-4539 |
| A70R156 | 0683-1045 | 3 | | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| A70R157 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A70R158 | 0683-1025 | 9 | | RESISTOR 1K 5% .25W FC TC=-400/+600 | 01121 | CB1025 |
| A70R159 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70R160 | 0698-3450 | 9 | 2 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A70R161 | 0698-3450 | 9 | 2 | RESISTOR 42.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4222-F |
| A70R162 | 0757-0161 | 9 | 2 | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A70R163 | 0698-3493 | 0 | 1 | RESISTOR 4.12K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4121-F |
| A70R164 | 0757-0161 | 9 | | RESISTOR 604 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-604R-F |
| A70R165 | 0698-4484 | 1 | 1 | RESISTOR 19.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1912-F |
| A70R166 | 0698-4123 | 5 | 1 | RESISTOR 459 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-459R-F |
| A70R167 | 0757-0277 | 8 | 1 | RESISTOR 49.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4992-F |
| A70R171 | 0698-3268 | 7 | | RESISTOR 11.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1152-F |
| A70R172 | 0698-4494 | 3 | 1 | RESISTOR 35.7K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3572-F |
| A70R173 | 0698-8344 | 0 | 1 | RESISTOR 604K 1% .125W F TC=0+-100 | 28480 | 0698-8344 |
| A70R181 | 2100-3350 | 5 | | RESISTOR-TRMR 200 10% C SIDE-ADJ 1-TRN | 28480 | 2100-3350 |
| A70R182 | 0698-3228 | 9 | | RESISTOR 49.9K 1% .125W F TC=0+-100 | 28480 | 0698-3228 |
| A70R183 | 0757-0444 | 1 | 1 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A70R188 | 0757-0403 | 2 | 1 | RESISTOR 121 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-121R-F |
| A70R189 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A70R190 | 0683-2035 | 3 | | RESISTOR 20K 5% .25W FC TC=-400/+800 | 01121 | CB2035 |
| A70R191 | 0683-5125 | 8 | | RESISTOR 5.1K 5% .25W FC TC=-400/+700 | 01121 | CB5125 |
| A70R192 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A70TL1 | 1251-4822 | 6 | 1 | CONNECTOR 3 PIN M POST TYPE | 28480 | 1251-4822 |
| A70TL1 | 1258-0141 | 8 | 1 | JUMPER-REM | 28480 | 1258-0141 |
| A70U1 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U2 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U3 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U4 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U5 | 1826-0111 | 7 | 9 | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U6 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U7 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U8 | 1826-0217 | 4 | 6 | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U9 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U10 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U11 | 1826-0043 | 4 | 2 | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A70U12 | 1826-0109 | 3 | 1 | IC OP AMP WB TO-99 PKG | 34371 | HA2-2625-B0593 |
| A70U14 | 1820-1433 | 6 | 2 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A70U15 | 1820-1433 | 6 | 2 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A70U16 | 1820-1730 | 6 | 2 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A70U16 | 1200-0700 | 4 | 2 | SOCKET-IC 20-CONT DIP DIP-SLDR | 28480 | 1200-0700 |
| A70U17 | 1820-1730 | 6 | | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A70U17 | 1200-0700 | 4 | | SOCKET-IC 20-CONT DIP DIP-SLDR | 28480 | 1200-0700 |
| A70U18 | 1820-1934 | 2 | 1 | IC CONV B-B D/A 16-DIP-C PKG | 06645 | DAC-08RFQ |
| A70U19 | 1826-0026 | 3 | 1 | IC COMPARATOR PRON TO-99 PKG | 01295 | LM311L |
| A70U20 | 1820-1422 | 3 | 1 | IC MV TTL LS MONOSTBL RETRIG | 01295 | SN74LS122N |
| A70U21 | 1820-1194 | 6 | 1 | IC CNTR TTL LS BIN UP/DOWN SYNCHRO | 01295 | SN74LS193N |
| A70U22 | 1826-0421 | 2 | 1 | IC CONV RMS/DC 14-DIP-C PKG | 24355 | AD536AJ |
| A70U23 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U24 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U25 | 1826-0476 | 7 | 3 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A70U26 | 1826-0138 | 8 | 1 | IC COMPARATOR GP QUAD 14-DIP-P PKG | 01295 | LM339N |
| A70U27 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L585 | CA1458T |
| A70U28 | 1826-0111 | 7 | | IC OP AMP GP DUAL TO-99 PKG | 3L565 | CA1458T |
| A70U29 | 1826-0547 | 3 | 2 | IC OP AMP LOW-BIAS-H-IMPD DUAL 8-DIP-P | 01295 | TL872ACP |
| A70U30 | 1826-0547 | 3 | | IC OP AMP LOW-BIAS-H-IMPD DUAL 8-DIP-P | 01295 | TL872ACP |
| A70U31 | 1826-1188 | 8 | 1 | IC PI LOOP 16-DIP-P PKG | 3L585 | CD4046AF |
| A70U35 | 1826-0416 | 3 | 1 | VOID/CANCELLED | 28480 | 1826-0416 |
| A70U36 | 1826-0476 | 7 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A70U37 | 1826-0476 | 7 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL601CP |
| A70U38 | 1826-0417 | 6 | 1 | IC SWITCH ANLG QUAD 16-DIP-C PKG | 27014 | LF13333D |
| A70U39 | 1826-0217 | 4 | | IC OP AMP GP DUAL TO-99 PKG | 07933 | RC4558T |
| A70U40 | 1826-1202 | 7 | 1 | IC GATE TTL LS NAND TPL 3-INP | 01295 | SN74LS10N |
| A70U41 | 1826-0043 | 4 | | IC OP AMP GP TO-99 PKG | 3L585 | CA307T |
| A70U42 | 1826-0477 | 8 | 2 | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL610CP |
| A70U43 | 1826-0477 | 8 | | IC SWITCH ANLG 8-DIP-P PKG | 01295 | TL610CP |
| A70Y1 | 0410-0760 | 0 | 1 | CRYSTAL-QUARTZ 1.6425 MHZ HC-33/U-HLDR | 20480 | 0410-0760 |
| | 1200-0637 | 0 | 1 | SOCKET-IC 16-CONT DIP DIP-SLDR | 28480 | 1200-0637 |
| | 4640-0748 | 3 | 1 | EXTR-PC BD BLK POLYC .062-ND-THKNS | 28480 | 4640-0748 |
| | 4840-0756 | 3 | 1 | EXTR-PC BD WHT POLYC .062-SD-THKNS | 28480 | 4840-0756 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-------------------|
| AB0 | 03506-66500 | B | 1 | POWER SUPPLY (3506A/B/C) | 28480 | 03506-66500 |
| AB0BT1 | 1420-0251 | 6 | 1 | BATTERY 2.5V .1A-HR NI-CD SLDR-TAB | 28480 | 1420-0251 |
| AB0C1 | 0180-2779 | 6 | 2 | CAPACITOR-FXD 470UF+75-10% 50VDC AL | 56269 | 30D477G050FK2 |
| AB0C2 | 0180-2779 | 6 | 2 | CAPACITOR-FXD 470UF+75-10% 50VDC AL | 56269 | 30D477G050FK2 |
| AB0C3 | 0180-0098 | 8 | -2 | CAPACITOR-FXD 100UF+-20% 20VDC TA | 56269 | 15D0107X002052 |
| AB0C4 | 0180-0309 | 4 | 1 | CAPACITOR-FXD 4.7UF+-20% 16VDC TA | 56269 | 15D0475X0010A2 |
| AB0C5 | 0180-0098 | 8 | 1 | CAPACITOR-FXD 100UF+-20% 20VDC TA | 56269 | 15D0107X002052 |
| AB0C6 | 0180-0159 | 2 | 1 | CAPACITOR-FXD 220UF+-20% 16VDC TA | 56269 | 15D0227X0010S2 |
| AB0CR1 | 1901-0040 | 1 | 8 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR2 | 1990-0486 | 6 | 3 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| AB0CR3 | 1902-0579 | 3 | 3 | DIODE-ZNR 5.1V 5% PD=1W IR=100UA | 28480 | 1902-0579 |
| AB0CR4 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR5 | 1990-0486 | 5 | 3 | LED-LAMP LUM-INT=800UCD IF=30MA-MAX | 28480 | 5082-4684 |
| AB0CR6 | 1901-0662 | 3 | 3 | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| AB0CR7 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR8 | 1902-0777 | 3 | 1 | DIODE-ZNR 1N825 6.2V 5% DO-7 PD=.4W | 04713 | 1N825 |
| AB0CR9 | 1902-0644 | 3 | 3 | DIODE-ZNR 1N5363B 30V 5% PD=5W TC=+29KV | 28480 | 1902-0644 |
| AB0CR10 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR11 | 1902-3104 | 6 | 1 | DIODE-ZNR 5.62V 5% DO-35 PD=.4W | 28480 | 1902-3104 |
| AB0CR10 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR11 | 1990-0486 | 6 | 3 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| AB0CR12 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR13 | 1902-0644 | 3 | 3 | DIODE-ZNR 1N5363B 30V 5% PD=5W TC=+29KV | 28480 | 1902-0644 |
| AB0CR34 | 1990-0486 | 5 | 3 | LED-LAMP LUM-INT=800UCD IF=30MA-MAX | 28480 | 5082-4684 |
| AB0CR35 | 1901-0662 | 3 | 3 | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| AB0CR36 | 1902-0579 | 3 | 3 | DIODE-ZNR 5.1V 5% PD=1W IR=100UA | 28480 | 1902-0579 |
| AB0CR50 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR51 | 1990-0486 | 4 | 3 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 5082-4684 |
| AB0CR52 | 1901-0040 | 1 | 3 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| AB0CR53 | 1902-0644 | 3 | 3 | DIODE-ZNR 1N5363B 30V 5% PD=5W TC=+29KV | 28480 | 1902-0644 |
| AB0CR54 | 1990-0486 | 5 | 3 | LED-LAMP LUM-INT=800UCD IF=30MA-MAX | 28480 | 5082-4684 |
| AB0CR55 | 1901-0662 | 3 | 3 | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| AB0CR56 | 1902-0579 | 3 | 3 | DIODE-ZNR 5.1V 5% PD=1W IR=100UA | 28480 | 1902-0579 |
| AB0Q1 | 1854-0071 | 7 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| AB0R1 | 0698-3700 | 2 | 1 | RESISTOR 715 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-715R-F |
| AB0R2 | 0683-1045 | 3 | 1 | RESISTOR 100K 5% .25W FC TC=-400/+800 | 01121 | CB1045 |
| AB0R3 | 0683-4725 | 2 | 10 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R4 | 0683-2705 | 4 | 1 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| AB0R5 | 0683-3925 | 3 | 2 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CB3925 |
| AB0R6 | 0811-3290 | 7 | 2 | RESISTOR .1 5% 2W PW TC=0+-800 | 28480 | 0811-3290 |
| AB0R7 | 0683-6235 | 3 | 2 | RESISTOR 62K 5% .25W FC TC=-400/+800 | 01121 | CB6235 |
| AB0R8 | 0757-0401 | 0 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| AB0R9 | 0683-7255 | 6 | 2 | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CB7255 |
| AB0R10 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R11 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R12 | 0683-2025 | 1 | 4 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| AB0R13 | 0683-1005 | 5 | 3 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| AB0R14 | 0698-0061 | 8 | 1 | RESISTOR 0.25K 1% .125W F TC=0+-25 | 19701 | MC4C1/8-T9-0251-B |
| AB0R15 | 2130-4056 | 8 | 1 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 17-1RN | 02111 | 43P502 |
| AB0R16 | 0698-6360 | 6 | 4 | RESISTOR 10K .1% .125W F TC=0+-25 | 28480 | 0698-6360 |
| AB0R17 | 0683-3325 | 6 | 1 | RESISTOR 3.3K 5% .25W FC TC=-400/+700 | 01121 | CB3325 |
| AB0R18 | 0683-1025 | 9 | 1 | RESISTOR 1K 5% .25W FC TC=-400/+500 | 01121 | CB1025 |
| AB0R20 | 0697-4721 | 6 | 2 | RESISTOR 4.7K 10% .5W CC TC=0+647 | 01121 | EB4721 |
| AB0R21 | 0697-4721 | 6 | 2 | RESISTOR 4.7K 10% .5W CC TC=0+647 | 01121 | EB4721 |
| AB0R22 | 0683-2725 | 8 | 1 | RESISTOR 2.7K 5% .25W FC TC=-400/+700 | 01121 | CB2725 |
| AB0R23 | 0683-2025 | 1 | 3 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2025 |
| AB0R24 | 0683-4705 | 9 | 3 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| AB0R30 | 0683-3625 | 7 | 3 | RESISTOR 3K 5% .25W FC TC=-400/+700 | 01121 | CB3625 |
| AB0R31 | 0811-3290 | 3 | 3 | RESISTOR .1 5% 2W PW TC=0+-800 | 28480 | 0811-3290 |
| AB0R32 | 0683-6235 | 3 | 3 | RESISTOR 62K 5% .25W FC TC=-400/+800 | 01121 | CB6235 |
| AB0R33 | 0757-0401 | 9 | 3 | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| AB0R34 | 0683-7255 | 6 | 2 | RESISTOR 7.5K 5% .25W FC TC=-400/+700 | 01121 | CB7255 |
| AB0R35 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R36 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R37 | 0683-4725 | 2 | 2 | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R38 | 0698-6360 | 6 | 3 | RESISTOR 10K .1% .125W F TC=0+-25 | 28480 | 0698-6360 |
| AB0R39 | 0698-6360 | 6 | 3 | RESISTOR 10K .1% .125W F TC=0+-25 | 28480 | 0698-6360 |
| AB0R40 | 0683-1005 | 5 | 2 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| AB0R41 | 0683-2925 | 1 | 2 | RESISTOR 2K 5% .25W FC TC=-400/+700 | 01121 | CB2925 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|------------------|
| AB0R42 | 0683-2025 | 1 | | RESISTOR 2K 5% .25W FC TC=+400/+700 | 01121 | CB2025 |
| AB0R43 | 0683-4765 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4765 |
| AB0R50 | 0683-2425 | 5 | 1 | RESISTOR 2.4K 5% .25W FC TC=-400/+700 | 01121 | CB2425 |
| AB0R52 | 0683-1545 | 8 | 1 | RESISTOR 150K 5% .25W FC TC=-800/+900 | 01121 | CB1545 |
| AB0R53 | 0757-0401 | 9 | | RESISTOR 100 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-101-F |
| AB0R54 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R55 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R56 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R57 | 0690-3259 | 6 | 1 | RESISTOR 7.07K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-7871-F |
| AB0R58 | 0698-6360 | 6 | | RESISTOR 10K 1% .125W F TC=0+-25 | 28480 | 0698-6360 |
| AB0R59 | 0683-1005 | 5 | | RESISTOR 10 5% .25W FC TC=+400/+500 | 01121 | CB1005 |
| AB0R60 | 0683-6215 | 9 | 1 | RESISTOR 620 5% .25W FC TC=-400/+600 | 01121 | CB6215 |
| AB0R61 | 0683-4725 | 2 | | RESISTOR 4.7K 5% .25W FC TC=-400/+700 | 01121 | CB4725 |
| AB0R62 | 0686-1225 | 7 | 1 | RESISTOR 1.2K 5% .5W CC TC=0+647 | 01121 | ER1225 |
| AB0R63 | 0683-4705 | 8 | | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| AB0U1 | 1026-0243 | 6 | 3 | IC OP AMP GP DUAL TO-99 PKG | 04713 | MC1558G |
| AB0U2 | 1026-0243 | 6 | | IC OP AMP GP DUAL TO-99 PKG | 04713 | MC1558G |
| AB0U3 | 1026-0243 | 6 | | IC OP AMP GP DUAL TO-99 PKG | 04713 | MC1558G |
| | 4040-0747 | 2 | 1 | EXTR-PC BD GRA POLYC .062-RD-THKNS | 28480 | 4040-0747 |
| | 4040-0749 | 4 | 1 | EXTR-PC BD BRN POLYC .062-RD-THKNS | 28480 | 4040-0749 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A9B | 03586-66594 | 4 | 1 | SWITCH/DISPLAY (3586C) | 28480 | 03586-66594 |
| A9BC1 | 0180-0104 | 7 | 1 | CAPACITOR-FXD 200UF+75-10% 16VDC AL | 56289 | 30D207G016DF2 |
| A9BC2 | 0160-3847 | 9 | 3 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A9BC3 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 50CD477H016DF7 |
| A9BC4 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A9BC5 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A9BCR2 | 1990-0665 | 3 | 27 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR3 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR4 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR5 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR6 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR7 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR8 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR12 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR13 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR14 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR15 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR16 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR17 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR18 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR19 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR20 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR21 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR22 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR23 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR24 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR25 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR26 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR27 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR28 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR29 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR30 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR31 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A9BCR300 | 1901-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A9BCR301 | 1902-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A9BCR302 | 1902-0126 | 6 | 2 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A9BCR303 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A9BCR304 | 1902-3002 | 3 | | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A9BCR305 | 1902-0126 | 6 | | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A9BCR307 | 1902-0960 | 6 | 1 | DIODE-ZNR 12V 5% DO-35 PD=.4W TC=+.077% | 28480 | 1902-0960 |
| A9BDS1 | 1990-0592 | 5 | 13 | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS2 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS3 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS4 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS5 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS6 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS7 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS8 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS9 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS10 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS11 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS12 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS13 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A9BDS14 | 1990-0696 | 0 | 1 | DISPLAY-AN-SEG 1-CHAR .400-H RED | 28480 | 5082-7656 |
| A9BDS15 | 1990-0696 | 3 | 15 | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS16 | 1990-0699 | 3 | 7 | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS18 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS19 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS21 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS23 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS24 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS25 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS26 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A9BDS27 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS28 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS29 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS30 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS31 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS32 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS33 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS34 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS35 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS36 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS37 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BDS39 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A78DS40 | 1990-0676 | 0 | | LED-LIGHT BAR MODULE LHM-INT=3MCD | 28480 | 1LM1-2300 |
| A98J1 | 1251-5584 | 9 | 1 | CONNECTOR 34-PIN M POST TYPE | 28480 | 1251-5584 |
| A98J2 | 1251-5608 | 8 | 1 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5608 |
| A98J3 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J4 | 1251-5607 | 7 | | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J6 | 1251-5383 | 6 | 1 | CONNECTOR 2-PIN M POST TYPE | 28480 | 1251-5383 |
| A98L1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98L2 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98Q1- | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q8 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98R1 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R2 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R3 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R4 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R5 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R6 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R7 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R8 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R9 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R10 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R11 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R12 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R13 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R14 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R15 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R16 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R17 | 1810-0164 | 7 | 1 | NETWORK-RES 9 SIP4.7K OHM X B | 21637 | CSP09C07-472J |
| A98R18 | 1810-0269 | 3 | 1 | NETWORK-RES 9 SIP10.0K OHM X B | 28480 | 1810-0269 |
| A98R19 | 0757-0448 | 5 | 1 | RESISTOR 18.2K 1% .125W F TC=0/+100 | 24546 | C4-1/8-T0-1822-F |
| A98R20 | 0757-0426 | 9 | 1 | RESISTOR 1.3K 1% .125W F TC=0/+100 | 24546 | C4-1/8-T0-1301-F |
| A98R21 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R22 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R23 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R24 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R25 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A98S0 | 5060-9436 | 7 | 54 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S1 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S2 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S3 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S4 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S5 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S6 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S7 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S8 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S9 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S10 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S11 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S12 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S13 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S14 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S15 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S16 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S17 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S18 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S19 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S20 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S21 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S22 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S23 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S24 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S25 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S26 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S27 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S28 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S29 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S30 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S31 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S32 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S33 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S34 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S35 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S36 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S37 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S38 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S39 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98S40 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S41 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S42 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S43 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S44 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S45 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S46 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S47 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S48 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S49 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S50 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S51 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S52 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S53 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S300 | 3101-2441 | 6 | 1 | SWITCH-PB DPDT ALING .5A 100VAC | 28480 | 3101-2441 |
| A98U1 | 1820-1433 | 6 | 3 | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U2 | 1820-1433 | 6 | | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U3 | 1820-1433 | 6 | | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U4 | 1820-1740 | 8 | 3 | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U5 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U6 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U7 | 1820-1738 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A98U8 | 1820-1587 | 1 | 4 | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U9 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U10 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U11 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U12 | 1820-1200 | 5 | 2 | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U13 | 1820-1200 | 5 | | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U14 | 1820-1873 | 8 | 1 | IC BFR TTL LS INV GCTL 2-INP | 27014 | DM81LS90N |
| A98U15 | 1820-1492 | 7 | 1 | IC BFR TTL LS INV HEX 1-INP | 01295 | SN74LS368AN |
| A98U16 | 1820-1112 | 8 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| | 1200-0837 | 8 | 1 | SOCKET-RT-DENS 28-CONT DIP-SLDR | 28480 | 1200-0837 |
| | 1200-0638 | 7 | 1 | SOCKET-IC 14-CONT DIP DIP-SLDR | 28480 | 1200-0638 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98 | 03586-66595 | 5 | 1 | SWITCH/DISPLAY (3586A OPTION 003) | 28480 | 03586-66595 |
| A98C1 | 0180-0104 | 7 | 1 | CAPACITOR-FXD 200UF+75-10% 16VDC AL | 56289 | 3002676016DF2 |
| A98C2 | 0160-3847 | 9 | 3 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 3160-3847 |
| A98C3 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 5000477H016DF7 |
| A98C4 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 3160-3847 |
| A98C5 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98CR2 | 1990-0665 | 3 | 35 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR3 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR4 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR5 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR6 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR7 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR8 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR9 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR10 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR11 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR12 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR13 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR14 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR15 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR16 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR17 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR18 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR19 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR20 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR21 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR22 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR23 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR24 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR25 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR26 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR27 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR28 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR29 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR30 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR31 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR100 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR101 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR102 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR103 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR104 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR300 | 1901-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A98CR301 | 1902-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98CR302 | 1902-0126 | 6 | 2 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98CR303 | 1901-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A98CR304 | 1902-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98CR305 | 1902-0126 | 6 | 6 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98CR307 | 1902-0960 | 6 | 1 | DIODE-ZNR 12V 5% DO-35 PD=.4W TC=+.077% | 28480 | 1902-0960 |
| A98D16 | 1990-0699 | 3 | 9 | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D17 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D18 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D19 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D22 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D23 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D24 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D25 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D26 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS1 | 1990-0592 | 5 | 13 | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS2 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS3 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS4 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS5 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS6 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS7 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS8 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS9 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS10 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS11 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS12 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS13 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS14 | 1990-0691 | 3 | | DISPLAY-AN-SEG 1-CHAR .430-H RED | 28480 | 5082-7656 |
| A98DS15 | 1990-0696 | 0 | 17 | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A98DS20 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS21 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS27 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS28 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS29 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS30 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS31 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS32 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS33 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS34 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS35 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS36 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS37 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS38 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS39 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS40 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98J1 | 1251-5584 | 9 | 1 | CONNECTOR 34-PIN M POST TYPE | 28480 | 1251-5584 |
| A98J2 | 1251-5608 | 8 | 1 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5608 |
| A98J3 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J4 | 1251-5607 | 7 | | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J6 | 1251-5383 | 6 | 1 | CONNECTOR 2-PIN M POST TYPE | 28480 | 1251-5383 |
| A98L1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98L2 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98Q1 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q2 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q3 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q4 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q5 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q6 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q7 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q8 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98R1 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R2 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R3 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R4 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R5 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R6 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R7 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R8 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R9 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R10 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R11 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R12 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R13 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R14 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R15 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R16 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R17 | 1810-0269 | 3 | 1 | NETWORK-RES 9-STP10.0K OHM X 8 | 28480 | 1810-0269 |
| A98R18 | 1810-0164 | 7 | 1 | NETWORK-RES 9-S1P4.7K OHM X 8 | 91637 | CSP02C07-472J |
| A98R19 | 0757-0448 | 5 | 1 | RESISTOR 18.2K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1822-F |
| A98R20 | 0757-0426 | 9 | 1 | RESISTOR 1.3K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1301-F |
| A98R21 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R22 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R23 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R24 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R25 | 0683-1805 | 5 | 1 | RESISTOR 18 5% .25W FC TC=-400/+500 | 01121 | CB1805 |
| A98S0 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S1 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S2 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S3 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S4 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S5 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S6 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S7 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S8 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S9 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S10 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S11 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S12 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S13 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S14 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S15 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S16 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S17 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S18 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S19 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98S20 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S21 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S22 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S23 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S24 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S25 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S26 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S27 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S28 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S29 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S30 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S31 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S32 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S33 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S34 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S35 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S36 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S37 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S38 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S39 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S40 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S41 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S42 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S43 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S44 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S45 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S46 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S47 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S48 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S49 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S50 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S51 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S52 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S53 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S54 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S55 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S56 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S57 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S58 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S59 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S60 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S61 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S62 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S63 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S64 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S65 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S66 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S67 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S68 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S69 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S70 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S71 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S72 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S73 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S74 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S75 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S76 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S77 | 5060-9436 | 7 | | PUSHEUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S300 | 3101-2441 | 6 | 1 | SWITCH-PB DPDT ALNG .5A 100VAC | 28480 | 3101-2441 |
| A98U1 | 1820-1433 | 6 | 3 | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 81295 | SN74LS164N |
| A98U2 | 1820-1433 | 6 | | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 81295 | SN74LS164N |
| A98U3 | 1820-1433 | 6 | | IC SHF-RGTR TTL LS R-S SERIAL-IN PRL-OUT | 81295 | SN74LS164N |
| A98U4 | 1820-1740 | 8 | 3 | IC DRVR TTL DSPL DRVR | 27014 | D58B63N |
| A98U5 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | D58B63N |
| A98U6 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | D58B63N |
| A98U7 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 81295 | SN74LS273N |
| A98U8 | 1820-1587 | 1 | 4 | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8852N |
| A98U9 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8852N |
| A98U10 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8852N |
| A98U11 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8852N |
| A98U12 | 1820-1200 | 5 | 2 | IC INV TTL LS HEX | 81295 | SN74LS05N |
| A98U13 | 1820-1200 | 5 | | IC INV TTL LS HEX | 81295 | SN74LS05N |
| A98U14 | 1820-1873 | 8 | 1 | IC BFR TTL LS INV OCTIL 2 INP | 27014 | DM81LS98N |
| A98U15 | 1820-1492 | 7 | 1 | IC BFR TTL LS INV HEX 1-INP | 81295 | SN74LS368N |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|-----------------------------------|----------|-----------------|
| A98U16 | 1820-1112 | B | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| | 1200-0837 | B | 1 | SOCKET-HI-DENS 28-CONT DIP-SLDR | 28480 | 1200-0837 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98 | 03526-66596 | 6 | 1 | SWITCH/DISPLAY (3506A STANDARD) | 28480 | 03526-66596 |
| A98C1 | 0180-0164 | 7 | 1 | CAPACITOR-FXD 280UF+75-10% 16VDC AL | 56289 | 30P207G016DF2 |
| A98C2 | 0160-3847 | 2 | 3 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 9160-3847 |
| A98C3 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 50P0477H016DF7 |
| A98C4 | 0160-3847 | 2 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98C5 | 0160-3847 | 2 | 9 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98CR2 | 1990-0665 | 3 | 34 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR3 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR4 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR5 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR6 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR7 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR8 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR9 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR10 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR11 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR12 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR13 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR14 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR15 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR16 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR17 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR18 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR19 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR20 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR21 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR22 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR23 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR24 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR25 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR26 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR27 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR28 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR29 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR30 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR31 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR131 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR102 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR133 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR104 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR300 | 1990-0625 | 2 | 2 | DIODE-GEN PRP 100V 200MA TO-7 | 28480 | 1990-0625 |
| A98CR301 | 1902-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98CR302 | 1902-0126 | 6 | 2 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98CR303 | 1901-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A98CR304 | 1902-3002 | 3 | | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98CR305 | 1902-0126 | 6 | | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98CR307 | 1902-0960 | 6 | 1 | DIODE-ZNR 12V 5% DO-35 PD=.4W TC=+.077% | 28480 | 1902-0960 |
| A98DS1 | 1990-0592 | 5 | 13 | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS2 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS3 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS4 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS5 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS6 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS7 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS8 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS9 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS10 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS11 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS12 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS13 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43 H | 28480 | 5082-7653 |
| A98DS14 | 1990-0691 | 3 | 1 | DISPLAY-AN SEG 1-CHAR .400 H RED | 28480 | 5082-7656 |
| A98DS15 | 1990-0696 | 0 | 17 | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 11M1-2300 |
| A98DS16 | 1990-0699 | 3 | 7 | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS17 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS18 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS20 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 11M1-2300 |
| A98DS21 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 11M1-2300 |
| A98DS23 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS24 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS25 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS26 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 11M1-2350 |
| A98DS27 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 11M1-2300 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A98DS28 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS29 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS30 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS31 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS32 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS33 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS34 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS35 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS36 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS37 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS38 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS39 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS40 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A9BJ1 | 1251-5584 | 9 | 1 | CONNECTOR 34-PIN M POST TYPE | 28480 | 1251-5584 |
| A9BJ2 | 1251-5608 | 8 | 1 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5608 |
| A9BJ3 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A9BJ4 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A9BJ6 | 1251-5383 | 6 | 1 | CONNECTOR 2-PIN M POST TYPE | 28480 | 1251-5383 |
| A9BL1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH MLD 250UH 10% .25DX.5IG | 28480 | 9100-0541 |
| A9BL2 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH MLD 250UH 10% .25DX.5IG | 28480 | 9100-0541 |
| A9BQ1 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ2 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ3 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ4 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ5 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ6 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ7 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BQ8 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A9BR1 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR2 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR3 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR4 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR5 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR6 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR7 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR8 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A9BR9 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR10 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR11 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR12 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR13 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR14 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR15 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR16 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A9BR18 | 1810-0164 | 7 | 1 | NETWORK-RES 9-51P4.7K OHM X 8 | 21637 | OSP2007-472J |
| A9BR18 | 1810-0269 | 3 | 1 | NETWORK-RES 9-51P10.0K OHM X 8 | 28480 | 1810-0269 |
| A9BR19 | 0757-0448 | 5 | 1 | RESISTOR 18.2K 1% .125W F TC=0/+100 | 24546 | C4 1/8-T0-1822-F |
| A9BR20 | 0757-0426 | 9 | 1 | RESISTOR 1.3K 1% .125W F TC=0/+100 | 24546 | C4 1/8-T0-1301-F |
| A9BR21 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A9BR22 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A9BR23 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A9BR24 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A9BR25 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A9BS0 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS1 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS2 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS3 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS4 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS5 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS6 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS7 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS8 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS9 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS10 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS11 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS12 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS13 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS14 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS15 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS16 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS17 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS18 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A9BS19 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C | D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|---|---|-----|--|----------|-----------------|
| A98S20 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S21 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S22 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S23 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S24 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S25 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S26 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S27 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S28 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S29 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S30 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S31 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S32 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S33 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S34 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S35 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S36 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S37 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S38 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S39 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S40 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S41 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S42 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S43 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S44 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S45 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S46 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S47 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S48 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S49 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S50 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S51 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S52 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S53 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S54 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S55 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S56 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S57 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S58 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S59 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S60 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S61 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S62 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S63 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S64 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S65 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S66 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S67 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S68 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S69 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S70 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S71 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S72 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S73 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S74 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S75 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S76 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S77 | 5060-9436 | 7 | | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S300 | 3131-2441 | 6 | | 1 | SWITCH-PB DPDT ALING 15A 100VAC | 28480 | 3131-2441 |
| A98U1 | 1020-1433 | 6 | | 3 | IC SHF-RCFR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U2 | 1020-1433 | 6 | | 3 | IC SHF-RCFR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U3 | 1020-1433 | 6 | | 3 | IC SHF-RCFR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U4 | 1020-1740 | 8 | | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U5 | 1020-1740 | 8 | | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U6 | 1020-1740 | 8 | | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U7 | 1020-1730 | 6 | | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A98U8 | 1020-1587 | 1 | | 4 | IC DRVR TTL LED DRVR HEX 1 INP | 27014 | DM8859N |
| A98U9 | 1020-1587 | 1 | | 4 | IC DRVR TTL LED DRVR HEX 1 INP | 27014 | DM8859N |
| A98U10 | 1020-1587 | 1 | | 4 | IC DRVR TTL LED DRVR HEX 1 INP | 27014 | DM8859N |
| A98U11 | 1020-1587 | 1 | | 4 | IC DRVR TTL LED DRVR HEX 1 INP | 27014 | DM8859N |
| A98U12 | 1020-1200 | 5 | | 2 | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U13 | 1020-1200 | 5 | | 2 | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U14 | 1020-1073 | 8 | | 1 | IC BFR TTL LS INV CCTL 2 INP | 27014 | DM81LS08N |
| A98U15 | 1020-1492 | 7 | | 1 | IC BFR TTL LS INV HEX 1 INP | 01295 | SN74LS368AN |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|-----------------------------------|----------|-----------------|
| A98U16 | 1020-1112 | B | 1 | IC FF TTL LS D-TYPE PGS-EDGE-TRIG | 01295 | 5N74LS74AN |
| | 1200-0837 | B | 1 | SOCKET-HT-DENS 28-CONT DIP-SLDR | 28400 | 1200-0837 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98 | 03586-66597 | 7 | 1 | SWITCH/DISPLAY (3584B STANDARD) | 28480 | 03586-66597 |
| A98C1 | 0180-0104 | 7 | 1 | CAPACITOR-FXD 200UF±75-10% 16VDC AL | 56289 | 3002076016DF2 |
| A98C2 | 0160-3847 | 9 | 3 | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98C3 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF±75-10% 16VDC AL | 56289 | 5000477H016DF7 |
| A98C4 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98C5 | 0160-3847 | 9 | | CAPACITOR-FXD .01UF +100-0% 50VDC CER | 28480 | 0160-3847 |
| A98CR2 | 1990-0665 | 3 | 35 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR3 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR4 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR5 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR6 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR7 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR8 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR9 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR10 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR11 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR12 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR13 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR14 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR15 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR16 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR17 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR18 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR19 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR20 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR21 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR22 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR23 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR24 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR25 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR26 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR27 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR28 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR29 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR30 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR31 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR101 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR102 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR103 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR104 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR200 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98CR300 | 1961-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1961-0025 |
| A98CR301 | 1962-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1962-3002 |
| A98CR302 | 1962-0126 | 6 | 2 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1962-0126 |
| A98CR303 | 1961-0025 | 2 | | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1961-0025 |
| A98CR304 | 1962-3002 | 3 | | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1962-3002 |
| A98CR305 | 1962-0126 | 6 | | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1962-0126 |
| A98CR307 | 1962-0960 | 4 | 1 | DIODE-ZNR 12V 5% DO-35 PD=.4W TC=+.677% | 28480 | 1962-0960 |
| A98DS1 | 1990-0592 | 5 | 13 | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS2 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS3 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS4 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS5 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS6 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS7 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS8 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS9 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS10 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS11 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS12 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS13 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98DS14 | 1990-0681 | 5 | 1 | DISPLAY-AN-SEG 1-CHAR .46H-H RED | 28480 | 5082-7654 |
| A98DS15 | 1990-0676 | 8 | 17 | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2330 |
| A98DS16 | 1990-0699 | 3 | 7 | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS17 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS18 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS20 | 1990-0676 | 8 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2330 |
| A98DS21 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS23 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS24 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS25 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS26 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS27 | 1990-0676 | 8 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2330 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A98DS28 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS29 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS30 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS31 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS32 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS33 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS34 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS35 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS36 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS37 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS38 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS39 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS40 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98J1 | 1251-5584 | 9 | 1 | CONNECTOR 34-PIN M POST TYPE | 28480 | 1251-5584 |
| A98J2 | 1251-5608 | 8 | 1 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5608 |
| A98J3 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J4 | 1251-5607 | 7 | 7 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J6 | 1251-5383 | 6 | 1 | CONNECTOR 2-PIN M POST TYPE | 28480 | 1251-5383 |
| A98L1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98L2 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98Q1 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q2 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q3 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q4 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q5 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q6 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q7 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q8 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98R1 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R2 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R3 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R4 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R5 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R6 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R7 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R8 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R9 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R10 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R11 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R12 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R13 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R14 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R15 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R16 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R17 | 1810-0269 | 3 | 1 | NETWORK-RES 9-SIP10.0K OHM X 8 | 28480 | 1810-0269 |
| A98R18 | 1810-0164 | 7 | 1 | NETWORK-RES 9-SIP4.7K OHM X 8 | 91637 | CSP09C07-472J |
| A98R19 | 0757-0448 | 5 | 1 | RESISTOR 18.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1822-F |
| A98R20 | 0757-0426 | 9 | 1 | RESISTOR 1.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1301-F |
| A98R21 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R22 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R23 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R24 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R25 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A98S0 | 5060-9436 | 7 | 79 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S1 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S2 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S3 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S4 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S5 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S6 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S7 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S8 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S9 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S10 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S11 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S12 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S13 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S14 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S15 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S16 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S17 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S18 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98S19 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S20 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S21 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S22 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S23 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S24 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S25 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S26 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S27 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S28 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S29 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S30 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S31 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S32 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S33 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S34 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S35 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S36 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S37 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S38 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S39 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S40 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S41 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S42 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S43 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S44 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S45 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S46 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S47 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S48 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S49 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S50 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S51 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S52 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S53 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S54 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S55 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S56 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S57 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S58 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S59 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S60 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S61 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S62 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S63 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S64 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S65 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S66 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S67 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S68 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S69 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S70 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S71 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S72 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S73 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S74 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S75 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S76 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S77 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S300 | 3101-2441 | 6 | 1 | SWITCH-PB DPDT ALTNQ .5A 100VAC | 28480 | 3101-2441 |
| A98U1 | 1820-1433 | 6 | 3 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U2 | 1820-1433 | 6 | | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U3 | 1820-1433 | 6 | | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U4 | 1820-1740 | 8 | 3 | IC DRVR TTL DSPL DRVR | 27814 | DM8863N |
| A98U5 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27814 | DM8863N |
| A98U6 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27814 | DM8863N |
| A98U7 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG CCM | 01295 | SN74LS273N |
| A98U8 | 1820-1507 | 1 | 4 | IC DRVR TTL LED DRVR HEX 1-INP | 27814 | DM8859N |
| A98U9 | 1820-1507 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27814 | DM8859N |
| A98U10 | 1820-1507 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27814 | DM8859N |
| A98U11 | 1820-1507 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27814 | DM8859N |
| A98U12 | 1820-1200 | 5 | 2 | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U13 | 1820-1200 | 5 | | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U14 | 1820-1073 | 8 | 1 | IC BFR TTL LS INV OCTL 2-INP | 27814 | DM31LS98N |
| A98U15 | 1820-1422 | 7 | 1 | IC BFR TTL LS INV HEX 1-INP | 01295 | SN74LS368AN |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|-----------------------------------|----------|-----------------|
| A9BU16 | 1820-1112 | B | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| | 1200-0837 | B | 1 | SOCKET-HI-DENS 28-CONT DIP-SLDR | 28480 | 1200-0837 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98 | 03586-66598 | 8 | 1 | SWITCH/DISPLAY (3586B OPTION 003) | 28480 | 03586-66598 |
| A98C1 | 0180-0104 | 7 | 1 | CAPACITOR-FXD 200UF+75-10% 16VDC AL | 56289 | 30D207G016DF2 |
| A98C2 | 0160-3847 | 9 | 3 | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 3163 3847 |
| A98C3 | 0180-2651 | 3 | 1 | CAPACITOR-FXD 470UF+75-10% 16VDC AL | 56289 | 50D0477H016DF7 |
| A98C4 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 0160-3847 |
| A98C5 | 0160-3847 | 9 | 9 | CAPACITOR-FXD .01UF +100 0% 50VDC CER | 28480 | 0160-3847 |
| A98C2 | 1990-0665 | 3 | 36 | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C3 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C4 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C5 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C6 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C7 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C8 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C9 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C10 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C11 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C12 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C13 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C14 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C15 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C16 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C17 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C18 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C19 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C20 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C21 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C22 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C23 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C24 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C25 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C26 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C27 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C28 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C29 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C30 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C31 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C100 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C101 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C102 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C103 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C104 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C200 | 1990-0665 | 3 | | LED-LAMP LUM-INT=1MCD IF=20MA-MAX BVR=5V | 28480 | 1990-0665 |
| A98C300 | 1991-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1991-0025 |
| A98C301 | 1902-3002 | 3 | 2 | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98C302 | 1902-0126 | 6 | 2 | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98C303 | 1901-0025 | 2 | 2 | DIODE-GEN PRP 100V 200MA DO-7 | 28480 | 1901-0025 |
| A98C304 | 1902-3002 | 3 | | DIODE-ZNR 2.37V 5% DO-7 PD=.4W TC=-.074% | 28480 | 1902-3002 |
| A98C305 | 1902-0126 | 6 | | DIODE-ZNR 2.61V 5% DO-7 PD=.4W TC=-.072% | 28480 | 1902-0126 |
| A98D51 | 1990-0592 | 5 | 13 | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D52 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D53 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D54 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D55 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D56 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D57 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D58 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D59 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D510 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D511 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D512 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D513 | 1990-0592 | 5 | | DISPLAY-NUM-SEG 1-CHAR .43-H | 28480 | 5082-7653 |
| A98D514 | 1990-0681 | 3 | 1 | DISPLAY-AN-SEG 1-CHAR .408-H RED | 28480 | 5082-7656 |
| A98D515 | 1990-0676 | 0 | 17 | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98D516 | 1990-0699 | 3 | 9 | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D517 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D518 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D519 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D520 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98D521 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98D522 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D523 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D524 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98D525 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A98DS26 | 1990-0699 | 3 | | LED-LIGHT BAR MODULE LUM-INT=7MCD | 28480 | 1LM1-2350 |
| A98DS27 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS28 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS29 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS30 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS31 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS32 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS33 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS34 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS35 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS36 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS37 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS38 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS39 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98DS40 | 1990-0696 | 0 | | LED-LIGHT BAR MODULE LUM-INT=3MCD | 28480 | 1LM1-2300 |
| A98J1 | 1251-5584 | 9 | 1 | CONNECTOR 34-PIN M POST TYPE | 28480 | 1251-5584 |
| A98J2 | 1251-5608 | 8 | 1 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5608 |
| A98J3 | 1251-5607 | 7 | 2 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J4 | 1251-5607 | 7 | | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-5607 |
| A98J6 | 1251-5383 | 6 | 1 | CONNECTOR 2-PIN M POST TYPE | 28480 | 1251-5383 |
| A98L1 | 9100-0541 | 7 | 2 | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98L2 | 9100-0541 | 7 | | INDUCTOR RF-CH-MLD 250UH 10% .25DX.5LG | 28480 | 9100-0541 |
| A98Q1 | 1853-0016 | 8 | 8 | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q2 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q3 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q4 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q5 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q6 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q7 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98Q8 | 1853-0016 | 8 | | TRANSISTOR PNP SI TO-92 PD=300MW | 28480 | 1853-0016 |
| A98R1 | 0683-2705 | 4 | 8 | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R2 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R3 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R4 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R5 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R6 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R7 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R8 | 0683-2705 | 4 | | RESISTOR 27 5% .25W FC TC=-400/+500 | 01121 | CB2705 |
| A98R9 | 0683-1825 | 7 | 8 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R10 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R11 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R12 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R13 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R14 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R15 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R16 | 0683-1825 | 7 | | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A98R17 | 1810-0269 | 3 | 1 | NETWORK-RES 7-SIP10.9K OHM X B | 28480 | 1810-0269 |
| A98R18 | 1810-0164 | 7 | 1 | NETWORK-RES 9-STP4.7K OHM X B | 91637 | CSP09C07-472J |
| A98R19 | 0757-0448 | 5 | 1 | RESISTOR 10.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1822-F |
| A98R20 | 0757-0426 | 9 | 1 | RESISTOR 1.3K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1301-F |
| A98R21 | 0683-2005 | 7 | 4 | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R22 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R23 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R24 | 0683-2005 | 7 | | RESISTOR 20 5% .25W FC TC=-400/+500 | 01121 | CB2005 |
| A98R25 | 0683-1005 | 5 | 1 | RESISTOR 10 5% .25W FC TC=-400/+500 | 01121 | CB1005 |
| A98S0 | 5060-9436 | 7 | 78 | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S1 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S2 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S3 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S4 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S5 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S6 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S7 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S8 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S9 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S10 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S11 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S12 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S13 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S14 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S15 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S16 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S17 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S18 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S19 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| A98S20 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S21 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S22 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S23 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S24 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S25 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S26 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S27 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S28 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S29 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S30 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S31 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S32 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S33 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S34 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S35 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S36 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S37 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S38 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S39 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S40 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S41 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S42 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S43 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S44 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S45 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S46 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S47 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S48 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S49 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S50 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S51 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S52 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S53 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S54 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S55 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S56 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S57 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S58 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S59 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S60 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S61 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S62 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S63 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S64 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S65 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S66 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S67 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S68 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S69 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S70 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S71 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S72 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S73 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S74 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S75 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S76 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S77 | 5060-9436 | 7 | | PUSHBUTTON SWITCH P.C. MOUNT | 28480 | 5060-9436 |
| A98S300 | 3101-2441 | 6 | 1 | SWITCH-PB DPDT ALING .5A 103VAC | 28480 | 3101-2441 |
| A98U1 | 1820-1433 | 6 | 3 | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U2 | 1820-1433 | 6 | | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U3 | 1820-1433 | 6 | | IC SHF-RCTR TTL LS R-S SERIAL-IN PRL-OUT | 01295 | SN74LS164N |
| A98U4 | 1820-1740 | 8 | 3 | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U5 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U6 | 1820-1740 | 8 | | IC DRVR TTL DSPL DRVR | 27014 | DS8863N |
| A98U7 | 1820-1730 | 6 | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG COM | 01295 | SN74LS273N |
| A98U8 | 1820-1587 | 1 | 4 | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U9 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U10 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U11 | 1820-1587 | 1 | | IC DRVR TTL LED DRVR HEX 1-INP | 27014 | DM8859N |
| A98U12 | 1820-1200 | 5 | 2 | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U13 | 1820-1200 | 5 | | IC INV TTL LS HEX | 01295 | SN74LS05N |
| A98U14 | 1820-1873 | 8 | 1 | IC BFR TTL LS INV CCTL 2-INP | 27014 | DM81LS98N |
| A98U15 | 1820-1492 | 7 | 1 | IC BFR TTL LS INV HEX 1-INP | 01295 | SN74LS369AN |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|-----------------------------------|----------|-----------------|
| A98U16 | 1820-1112 | B | 1 | IC FF TTL LS D-TYPE POS-EDGE-TRIG | 01295 | SN74LS74AN |
| | 1200-0837 | B | 1 | SOCKET-HI-DENS 28-CONT DIP-SLDR | 20480 | 1200-0837 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---------------------------------------|----------|-----------------|
| A99C75 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C76 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C77 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C78 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C79 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C80 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C81 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C82 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C83 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C84 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C85 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C86 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C87 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C88 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C89 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C90 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C91 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C92 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C93 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C94 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C95 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C96 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C97 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C98 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C99 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C100 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C101 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C102 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C103 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C104 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C105 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C106 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C107 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C108 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C109 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C110 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C111 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C112 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C113 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C114 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C115 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C116 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C117 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C118 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C119 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C120 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C121 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C122 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C123 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C124 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C125 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C126 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C127 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C128 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C129 | 0160-3879 | 7 | | CAPACITOR-FXD .01UF +-20% 100VDC CER | 28480 | 0160-3879 |
| A99C130 | 0180-2779 | 6 | 1 | CAPACITOR-FXD 470UF+75-16% 50VDC AL | 56289 | 30D477G050FK2 |
| A99C131 | 0160-0576 | 5 | 3 | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A99C132 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A99C133 | 0160-0576 | 5 | | CAPACITOR-FXD .1UF +-20% 50VDC CER | 28480 | 0160-0576 |
| A99CR1 | 1901-0662 | 3 | 0 | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR2 | 1931-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR3 | 1901-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR4 | 1931-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR5 | 1901-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR6 | 1901-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR7 | 1901-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR8 | 1931-0662 | 3 | | DIODE-PWR RECT 100V 6A | 04713 | MR751 |
| A99CR9 | 1901-0026 | 3 | 4 | DIODE-PWR RECT 200V 750MA DO-29 | 28480 | 1901-0026 |
| A99CR10 | 1901-0026 | 3 | | DIODE-PWR RECT 200V 750MA DO-29 | 28480 | 1901-0026 |
| A99CR11 | 1901-0026 | 3 | | DIODE-PWR RECT 200V 750MA DO-29 | 28480 | 1901-0026 |
| A99CR12 | 1901-0026 | 3 | | DIODE-PWR RECT 200V 750MA DO-29 | 28480 | 1901-0026 |
| A99F1- A99F4 | 2100-0568 | 1 | 4 | RESISTOR-TRMR 100 10% C TOP-ADJ 1-TRN | 28480 | 2100-0568 |

See introduction to this section for ordering information
*Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|------------------|
| A99J1 | 1251-5606 | 6 | 2 | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5606 |
| A99J2 | 1251-5606 | 6 | | CONNECTOR 14-PIN M POST TYPE | 28480 | 1251-5606 |
| A99J3 | 1251-4406 | 2 | 1 | CONTACT-CONN U/W-AMP-M FEM DRP | 28480 | 1251-4406 |
| A99J5 | 1251-0513 | 4 | 1 | CONNECTOR 5-PIN M POST TYPE | 28480 | 1251-0513 |
| A99L1 | 9100-1791 | 1 | 14 | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L2 | 9100-3548 | 0 | 40 | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L3 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L4 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L5 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L6 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L7 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L8 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L9 | 9100-3548 | 3 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L10 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L11 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L12 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L13 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L14 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L15 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L16 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L17 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L18 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L19 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L20 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L21 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L22 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L23 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L24 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L25 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L26 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L27 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L28 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L29 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L30 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L31 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L32 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L33 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L34 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L35 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L36 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L37 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L38 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L39 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L40 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L41 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L42 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L43 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L44 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L45 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L46 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L47 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L48 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L49 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L50 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L51 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L52 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99L53 | 9100-1791 | 1 | | INDUCTOR 290NH 20% .23DX.375LG | 28480 | 9100-1791 |
| A99L54 | 9100-3548 | 0 | | INDUCTOR RF-CH-MLD 470NH 5% .166DX.385LG | 28480 | 9100-3548 |
| A99R1 | 0686-2025 | 7 | 2 | RESISTOR 2K 5% .5W CC TC=0+647 | 01121 | EB2025 |
| A99R2 | 0686-2025 | 7 | | RESISTOR 2K 5% .5W CC TC=0+647 | 01121 | EB2025 |
| A99R3 | 0686-4715 | 6 | 1 | RESISTOR 470 5% .5W CC TC=0+529 | 01121 | EB4715 |
| A99R101 | 0683-1035 | 1 | 4 | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A99R102 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A99R104 | 0757-0283 | 6 | 2 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A99R105 | 0757-0283 | 6 | | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A99R106 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A99R107 | 0683-1035 | 1 | | RESISTOR 10K 5% .25W FC TC=-400/+700 | 01121 | CB1035 |
| A99R109 | 0686-1025 | 5 | 1 | RESISTOR 1K 5% .5W CC TC=0+647 | 01121 | EB1025 |
| A99T1 | 9100-0447 | 2 | 1 | TRANSFORMER VOLT RATIO: PRI: SEC 1, 2 | 28480 | 9100-0447 |
| A99T3 | 9100-1238 | 1 | 3 | TRANSFORMER-PULSE XFMR-PULSE,PC MTG | 28480 | 9100-1238 |
| A99T4 | 9100-1238 | 1 | | TRANSFORMER-PULSE XFMR-PULSE,PC MTG | 28480 | 9100-1238 |
| A99T5 | 9100-1238 | 1 | | TRANSFORMER-PULSE XFMR-PULSE,PC MTG | 28480 | 9100-1238 |
| A99U1 | 1590-0444 | 6 | 1 | OPTO-ISOLATOR LED-PDIO/XSTR IF=25MA-MAX | 28480 | 6N136 |
| A99U2 | 1826-0396 | 0 | 1 | IC 7815 V RGLTR T0-220 | 07263 | 7815UC |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--------|-----|--------------------------------------|----------|-----------------|
| | 1251-1365 | 6 | 1 | CONNECTOR-PC EDGE 22-CONT/ROW 2-ROWS | 28480 | 1251-1365 |
| | 1251-2035 | 9 | 1 | CONNECTOR-PC EDGE 15-CONT/ROW 2-ROWS | 28480 | 1251-2035 |
| | 1251-5566 | 7 | 1 | CONNECTOR-PC EDGE 12-CONT/ROW 2-ROWS | 28480 | 1251-5566 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|----------------------------|----------------|-----|-----|---------------------------------------|----------|-----------------|
| CHASSIS-MOUNTED COMPONENTS | | | | | | |
| B1 | 3168-0311 | 9 | 1 | FAN-TRAX 74-CFM 100-125V 50/60-HZ | 23936 | 4800X |
| | 3150-0210 | 4 | 1 | FILTER-ATR 32 STD MESH MET SCREEN | 20480 | 3150-0210 |
| | 03582-04104 | 8 | 1 | GUARD-FAN SWITCH | 20480 | 03582-04104 |
| CR20 | 1902-1217 | 8 | 1 | DIODE-1N3997R | 20480 | 1902-1217 |
| F1 | 2110-0565 | 9 | 1 | CAP-FUSEHOLDER | 20480 | 2110-0565 |
| | 2110-0002 | 9 | 1 | FUSE 2A 250V NTD 1.25X.25 UL | 75915 | 312002 |
| | 2110-0564 | 8 | 1 | HOLDER-FUSE | H9327 | 031,1657 |
| | 2110-0569 | 3 | 1 | NUT-FUSEHOLDER | 20480 | 2110-0569 |
| J100 | 1251-5790 | 9 | 1 | CONNECTOR-TEL JACK 2-DKT | 02309 | M-114B |
| K1 | 0490-1222 | 9 | 1 | RELAY-FAN | 20480 | 0490-1222 |
| LF1 | 9100-3910 | 0 | 1 | LINE FILTER | 20480 | 9100-3910 |
| M1 | 1120-0692 | 3 | 1 | METER-DB | 20480 | 1120-0692 |
| Q1 | 1854-0618 | 8 | 2 | TRANSISTOR NPN SI DARL TO-3 PD=150W | 04713 | MJ3000 |
| | 1200-0819 | 6 | 3 | SOCKET-XSTR 2-CONT TO-3 SLDR-EYE | 20480 | 1200-0819 |
| Q2 | 1853-0387 | 6 | 1 | TRANSISTOR PNP SI DARL TO-3 PD=150W | 04713 | MJ2500 |
| | 1200-0819 | 6 | 1 | SOCKET-XSTR 2-CONT TO-3 SLDR-EYE | 20480 | 1200-0819 |
| Q3 | 1854-0618 | 8 | 1 | TRANSISTOR NPN SI DARL TO-3 PD=150W | 04713 | MJ3000 |
| | 1200-0819 | 6 | 1 | SOCKET-XSTR 2-CONT TO-3 SLDR-EYE | 20480 | 1200-0819 |
| R100 | 2100-0669 | 3 | 1 | RESISTOR-VAR CONTROL CCP 50K 10% 100W | 20480 | 2100-0669 |
| R101 | 0683-1015 | 7 | 1 | RESISTOR 100 5% .25W FC TC=-400/+500 | 01121 | C01015 |
| RPG(M2) | 03586-61615 | 0 | 1 | ROTARY POSITION GENERATOR AND CABLE | 20480 | 03586-61615 |
| S1 | 3101-2298 | 1 | 2 | SWITCH-SLIDE | 20480 | 3101-2298 |
| | 3101-2298 | 1 | 1 | SWITCH-SLIDE | 20480 | 3101-2298 |
| | 3103-0020 | 7 | 1 | SWITCH-THERMAL | 20480 | 3103-0020 |
| SP100 | 9160-0229 | 4 | 1 | SPEAKER | 20480 | 9160-0229 |
| | 5040-7695 | 4 | 1 | MOUNT-SPEAKER | 20480 | 5040-7695 |
| T1 | 9100-0440 | 5 | 1 | TRANSFORMER-POWER | 20480 | 9100-0440 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|----------------------|
| MECHANICAL PARTS | | | | | | |
| MP1 | 5020-8805 | 8 | 1 | FRONT FRAME | 28480 | 5020-8805 |
| MP2 | 5020-8806 | 9 | 1 | REAR FRAME | 28480 | 5020-8806 |
| MP5 | 5040-7202 | 9 | 1 | TRIM, TOP | 28480 | 5040-7202 |
| MP6 | 5040-7201 | 8 | 1 | FCOT(STANDARD) | 28480 | 5040-7201 |
| MP7 | 1460-1345 | 5 | 2 | TILT STAND SST | 28480 | 1460-1345 |
| MP8 | 5040-7219 | 8 | 2 | STRAP, HANDLE, CAP-FRONT | 28480 | 5040-7219 |
| MP9 | 5040-7220 | 1 | 2 | STRAP, HANDLE, CAP-REAR | 28480 | 5040-7220 |
| MP13 | 5001-0440 | 1 | 2 | TRIM, SIDE | 28480 | 5001-0440 |
| MP14 | 5060-9941 | 9 | 2 | SIDE COVER (PERFORATED) | 28480 | 5060-9941 |
| MP15 | 5020-8836 | 5 | 4 | CORNER STRUT | 28480 | 5020-8836 |
| MP16 | 5060-9834 | 9 | 1 | TOP COVER | 28480 | 5060-9834 |
| MP17 | 03586-64101 | 5 | 1 | BOTTOM COVER | 28480 | 03586-64101 |
| MP18 | 5060-9941 | 9 | 1 | SIDE COVER (PERFORATED) | 28480 | 5060-9941 |
| MP19 | 5060-9803 | 2 | 2 | STRAP HANDLE | 28480 | 5060-9803 |
| MP20 | 03586-20203 | 6 | 1 | FRONT DRESS PANEL-UPPER (3586A) | 28480 | 03586-20203 |
| | 03586-00205 | 6 | 1 | FRONT DRESS PANEL-LOWER (3586A STD.) | 28480 | 03586-00205 |
| | 03586-00206 | 7 | 1 | FRONT DRESS PANEL-LOWER (3586A OPT 003) | 28480 | 03586-00206 |
| | 03586-20202 | 5 | 1 | FRONT DRESS PANEL-UPPER (3586B) | 28480 | 03586-20202 |
| | 03586-00204 | 5 | 1 | FRONT DRESS PANEL-LOWER (3586B STD.) | 28480 | 03586-00204 |
| | 03586-00203 | 4 | 1 | FRONT DRESS PANEL-LOWER (3586B OPT. 003) | 28480 | 03586-00203 |
| | 03586-00207 | 8 | 1 | FRONT DRESS PANEL-LOWER (3586B OPT. 002) | 28480 | 03586-00207 |
| | 03586-20204 | 7 | 1 | FRONT DRESS PANEL-UPPER (3586C) | 28480 | 03586-20204 |
| | 03586-00208 | 9 | 1 | FRONT DRESS PANEL-LOWER (3586C) | 28480 | 03586-00208 |
| MP21 | 03586-00201 | 2 | 1 | FRONT SUB-PANEL | 28480 | 03586-00201 |
| MP22 | 03586-00202 | 3 | 1 | REAR PANEL | 28480 | 03586-00202 |
| | 5040-6278 | 1 | 1 | DIVIDER STRIP | 28480 | 5040-6278 |
| | 5001-4645 | 6 | 1 | TRANSFORMER BELL COVER | 28480 | 5001-4645 |
| | 0535-0013 | 8 | 1 | KNURLED NUTS | 00000 | ORDER BY DESCRIPTION |
| | 5061-2009 | 8 | 1 | REAR FEET KIT | 28480 | 5061-2009 |
| | 03586-04704 | 8 | 1 | BRACE DIGITAL | 28480 | 03586-04704 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|---|----------|-----------------|
| CABLE PARTS LIST | | | | | | |
| W1 | 03586-61612 | 7 | 1 | CABLE, A99J1 TO A90J2 (14 PINS) | 28480 | 03586-61612 |
| W2 | 03586-61615 | 0 | 1 | CABLE, RPG TO A90J3 (5 PINS) | 28480 | 03586-61615 |
| W3 | 03586-61671 | 8 | 1 | CABLE, A15J2 TO REAR PANEL BNC LABELED "FO(0-32 MHZ)", BLACK | 28480 | 03586-61671 |
| W4 | 03586-61674 | 1 | 1 | CABLE, A40J3 TO REAR PANEL BNC LABELED "10 MHZ", VIOLET | 28480 | 03586-61674 |
| W5 | 03586-61675 | 2 | 1 | CABLE, A40J1 TO REAR PANEL BNC LABELED "INPUT-EXT REF", RED | 28480 | 03586-61675 |
| W6 | 03586-61676 | 3 | 1 | CABLE, A10J1 TO REAR PANEL BNC LABELED "10 MHZ OVEN", WHITE | 28480 | 03586-61676 |
| W7 | 03586-61677 | 4 | 1 | CABLE, A40J5 TO A11J1, BLUE | 28480 | 03586-61677 |
| W8 | 03586-61678 | 5 | 5 | CABLE, A50J3 TO A40J4, GRAY | 28480 | 03586-61678 |
| W9 | 03586-61678 | 5 | | CABLE, A51J3 TO A15J1, GRAY | 28480 | 03586-61678 |
| W10 | 03586-61678 | 5 | | CABLE, A52J2 TO A51J1, GRAY | 28480 | 03586-61678 |
| W11 | 03586-61678 | 5 | | CABLE, A52J1 TO A50J1, GRAY | 28480 | 03586-61678 |
| W12 | 03586-61678 | 5 | | CABLE, A5J1 TO A2J3, GRAY | 28480 | 03586-61678 |
| W13 | 03586-61691 | 2 | 2 | CABLE, A4J1 TO A2J2, GRAY/WHITE/RED | 28480 | 03586-61691 |
| W14 | 03586-61691 | 2 | | CABLE, A2J1 TO A1J1, GRAY/WHITE/RED | 28480 | 03586-61691 |
| W15 | 8120-1521 | 6 | 1 | CABLE, POWER | 28480 | 8120-1521 |
| W16 | 8120-2887 | 9 | 1 | CABLE, A61J1 TO REAR PANEL HPIB CONNECT AND A62 P.C. ASSEMBLY (34 PINS) | 28480 | 8120-2887 |
| W17 | 8120-2888 | 0 | 1 | CABLE, A60J3 TO A98J1 (34 PINS) | 28480 | 8120-2888 |
| | 1250-1499 | 5 | 1 | ADAPTER-COAX RTANG M-BNC F-BNC | 28480 | 1250-1499 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-3. Replaceable Parts

| Reference Designation | HP Part Number | C D | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|-----|--|----------|-----------------|
| MISCELLANEOUS PARTS | | | | | | |
| | 03586-66570 | 0 | 2 | EXTENDER BOARD-22 PIN | 28480 | 03586-66570 |
| | 03586-66591 | 1 | 2 | EXTENDER BOARD-15 PIN | 28480 | 03586-66591 |
| | 03586-90002 | 0 | 1 | MANUAL SERVICE | 28480 | 03586-90002 |
| | 03586-90012 | 2 | 1 | MANUAL OPERATE | 28480 | 03586-90012 |
| | 0370-1001 | 8 | 1 | KNOB-VOLUME | 28480 | 0370-1001 |
| | 0370-1303 | 3 | 1 | KNOB-FREQUENCY | 28480 | 0370-1303 |
| | 1460-0553 | 5 | 3 | CLIP-FRONT DRESS PANEL (UPPER) | 28480 | 1460-0553 |
| | 03586-04198 | 4 | 1 | COVER, POWER SUPPLY | 28480 | 03586-04198 |
| | 03586-04165 | 9 | 1 | COVER, PLENUM | 28480 | 03586-04165 |
| | 5041-0031 | 0 | 1 | KEY CAP -POWER | 28480 | 5041-0031 |
| | 5041-0285 | 6 | 10 | KEY CAP -PEARL PIPE | 28480 | 5041-0285 |
| | 5041-0343 | 7 | 1 | KEY CAP | 28480 | 5041-0343 |
| | 5041-0352 | 8 | 2 | KEY CAP -GRAY | 28480 | 5041-0352 |
| | 5041-0384 | 6 | 6 | KEY CAP -SMOKEPIPE | 28480 | 5041-0384 |
| | 5041-0417 | 6 | 15 | KEY CAP -BLACK | 28480 | 5041-0417 |
| | 5041-0450 | 7 | 1 | KEY CAP -BLUE | 28480 | 5041-0450 |
| | 5041-0774 | 8 | 1 | KEY CAP -STORE | 28480 | 5041-0774 |
| | 5041-0775 | 9 | 1 | KEY CAP -RECALL | 28480 | 5041-0775 |
| | 5041-0808 | 9 | 1 | KEY CAP -PERIOD | 28480 | 5041-0808 |
| | 5041-0811 | 4 | 1 | KEY CAP -1 | 28480 | 5041-0811 |
| | 5041-0812 | 5 | 1 | KEY CAP -2 | 28480 | 5041-0812 |
| | 5041-0813 | 6 | 1 | KEY CAP -3 | 28480 | 5041-0813 |
| | 5041-0814 | 7 | 1 | KEY CAP -4 | 28480 | 5041-0814 |
| | 5041-0815 | 8 | 1 | KEY CAP -5 | 28480 | 5041-0815 |
| | 5041-0816 | 9 | 2 | KEY CAP -6 | 28480 | 5041-0816 |
| | 5041-0817 | 0 | 1 | KEY CAP -7 | 28480 | 5041-0817 |
| | 5041-0818 | 1 | 1 | KEY CAP -8 | 28480 | 5041-0818 |
| | 5041-0819 | 2 | 1 | KEY CAP -9 | 28480 | 5041-0819 |
| | 5041-0855 | 6 | 2 | KEY CAP -ARROW | 28480 | 5041-0855 |
| | 5041-0943 | 3 | 1 | KEY CAP -LOCAL | 28480 | 5041-0943 |
| | 5041-1743 | 3 | 1 | KEY CAP -HZ MIN | 28480 | 5041-1743 |
| | 5041-1744 | 4 | 1 | KEY CAP -KHZ +DB | 28480 | 5041-1744 |
| | 5041-1745 | 5 | 1 | KEY CAP -MHZ -DB | 28480 | 5041-1745 |
| | 5041-1746 | 6 | 1 | KEY CAP -RDNG OFFSET | 28480 | 5041-1746 |
| | 5041-1747 | 7 | 1 | KEY CAP -CNTR FREQ | 28480 | 5041-1747 |
| | 5041-1748 | 8 | 1 | KEY CAP -THSHLD | 28480 | 5041-1748 |
| | 5041-1749 | 9 | 1 | KEY CAP -FREQ | 28480 | 5041-1749 |
| | 5041-1750 | 2 | 1 | KEY CAP -OFFSET | 28480 | 5041-1750 |
| | 5041-1751 | 3 | 1 | KEY CAP -TIME | 28480 | 5041-1751 |
| | 5041-1752 | 4 | 1 | KEY CAP -FULL SCALE | 28480 | 5041-1752 |
| | 5041-1753 | 5 | 1 | KEY CAP -FREQ STEP | 28480 | 5041-1753 |
| | 5041-1754 | 6 | 1 | KEY CAP -MEAS CONT | 28480 | 5041-1754 |
| | 1250-1499 | 5 | 1 | ADAPTER-COAX RIANG M-ENC F-ENC | 28480 | 1250-1499 |
| | 0460-1336 | 3 | 1 | TAPE-INDL .5-IN-W .0035-IN-T POLYE-FLM | 28480 | 0460-1336 |
| | 0340-0691 | 7 | 1 | INSULATOR POLYC | 28480 | 0340-0691 |
| | 0460-0280 | 4 | 1 | TAPE-INDL .375-IN-W .25-IN-T POLYU-FM | 28480 | 0460-0280 |

See introduction to this section for ordering information
 *Indicates factory selected value

Table 6-4. 3586 Non-Metric Hardware.


| Part Number | Quantity | Description | Use |
|-------------|----------|--------------------------------|---|
| 0624-0333 | 2 | 4-20 Self-Tap Screw (pan-head) | Hold A98S300 to A98 board. |
| 2200-0091 | 2 | 4-40x.562 Screw (pan head) | Hold oven assembly to A16 board. |
| 2510-0102 | 8 | 8-32x.375 Screw (flat head) | Hold on front handles. |
| 2510-0192 | 16 | 8-32x.25 Screw (flat head) | Hold System II frame together. |
| 2680-0129 | 6 | 8-32 x .312 Screw (pan head) | Hold filter caps to A99 board. |
| 2740-0003 | 1 | 10-32 Nut | Holds CR20 to Darlington Assembly. |
| 2950-0035 | 6 | 15/32-32 Nut | Hold large BNC connectors. |
| 2950-0043 | 5 | 3/8-32 Nut | Hold small BNC connectors. |
| 2950-0072 | 1 | 1/4-32 Nut | Holds Volume pot to sub panel. |
| 2950-0078 | 23 | 10-32 Nut | Hold Sealelectro connectors to PC board covers. |
| 2110-0569 | 1 | Nut | Holds fuseholder to rear panel. |

Notes: 1. Replacement washers should be selected to fit from standard stock.
2. For non-listed parts, see paragraph 6-6.

Table 6-5. Metric Hardware.

| Description | Part Number | Description | Part Number |
|-------------------------------|-------------|--------------------------------|-------------|
| <u>Pan Head Screws</u> | | <u>Flat Head Screws</u> | |
| M2.5x.45x6 | 0515-0150 | M2.5x.45x6 | 0515-0223 |
| M2.5x.45x12 | 0515-0063 | M2.5x.45x18 | 0515-0075 |
| M3x.5x6 | 0515-0055 | M3x.5x6 | 0515-0076 |
| M3x.5x8 | 0515-0104 | M3x.5x8 | 0515-0145 |
| M3x.5x10 | 0515-0054 | M3x.5x16 | 0515-0078 |
| M3x.5x10 (stainless) | 0515-0169 | M3x.5x20 | 0515-0158 |
| M3x.5x16 | 0515-0064 | M3x.5x25 | 0515-0079 |
| M3.5x.6x6 | 0515-0066 | M3.5x.6x6 | 0515-0080 |
| M3.5x.6x10 | 0515-0067 | M3.5x.6x8 | 0515-0166 |
| M3.5x.6x12 | 0515-0165 | M3.5x.6x10 | 0515-0081 |
| M3.5x.6x16 | 0515-0068 | M3.5x.6x16 | 0515-0082 |
| M3.5x.6x20 | 0515-0147 | M4x.7x10 (Allen) | 0515-0167 |
| M3.5x.6x25 | 0515-0069 | | |
| M4x.7x60 | 0515-0156 | | |
| | | <u>Nut (Hex)</u> | |
| | | M2.5x.45 | 0535-0008 |
| | | M3x.5 | 0535-0004 |
| | | M3.5x.6 | 0535-0007 |
| | | M3.5x.6 (knurled) | 0535-0013 |
| | | M4x.7 | 0535-0006 |
| | | | |
| <u>Hex Head Screw</u> | | | |
| M3x.5x8 (Self-Tap)* | 0515-0239 | | |

Notes:
1. Replacement washers should be selected to fit from standard stock.
2. For non-listed parts, see paragraph 6-6.
3. See paragraph 6-14 for a description of metric part designation.
4. *May be replaced with M3x.5x8PH (non-self-tap).

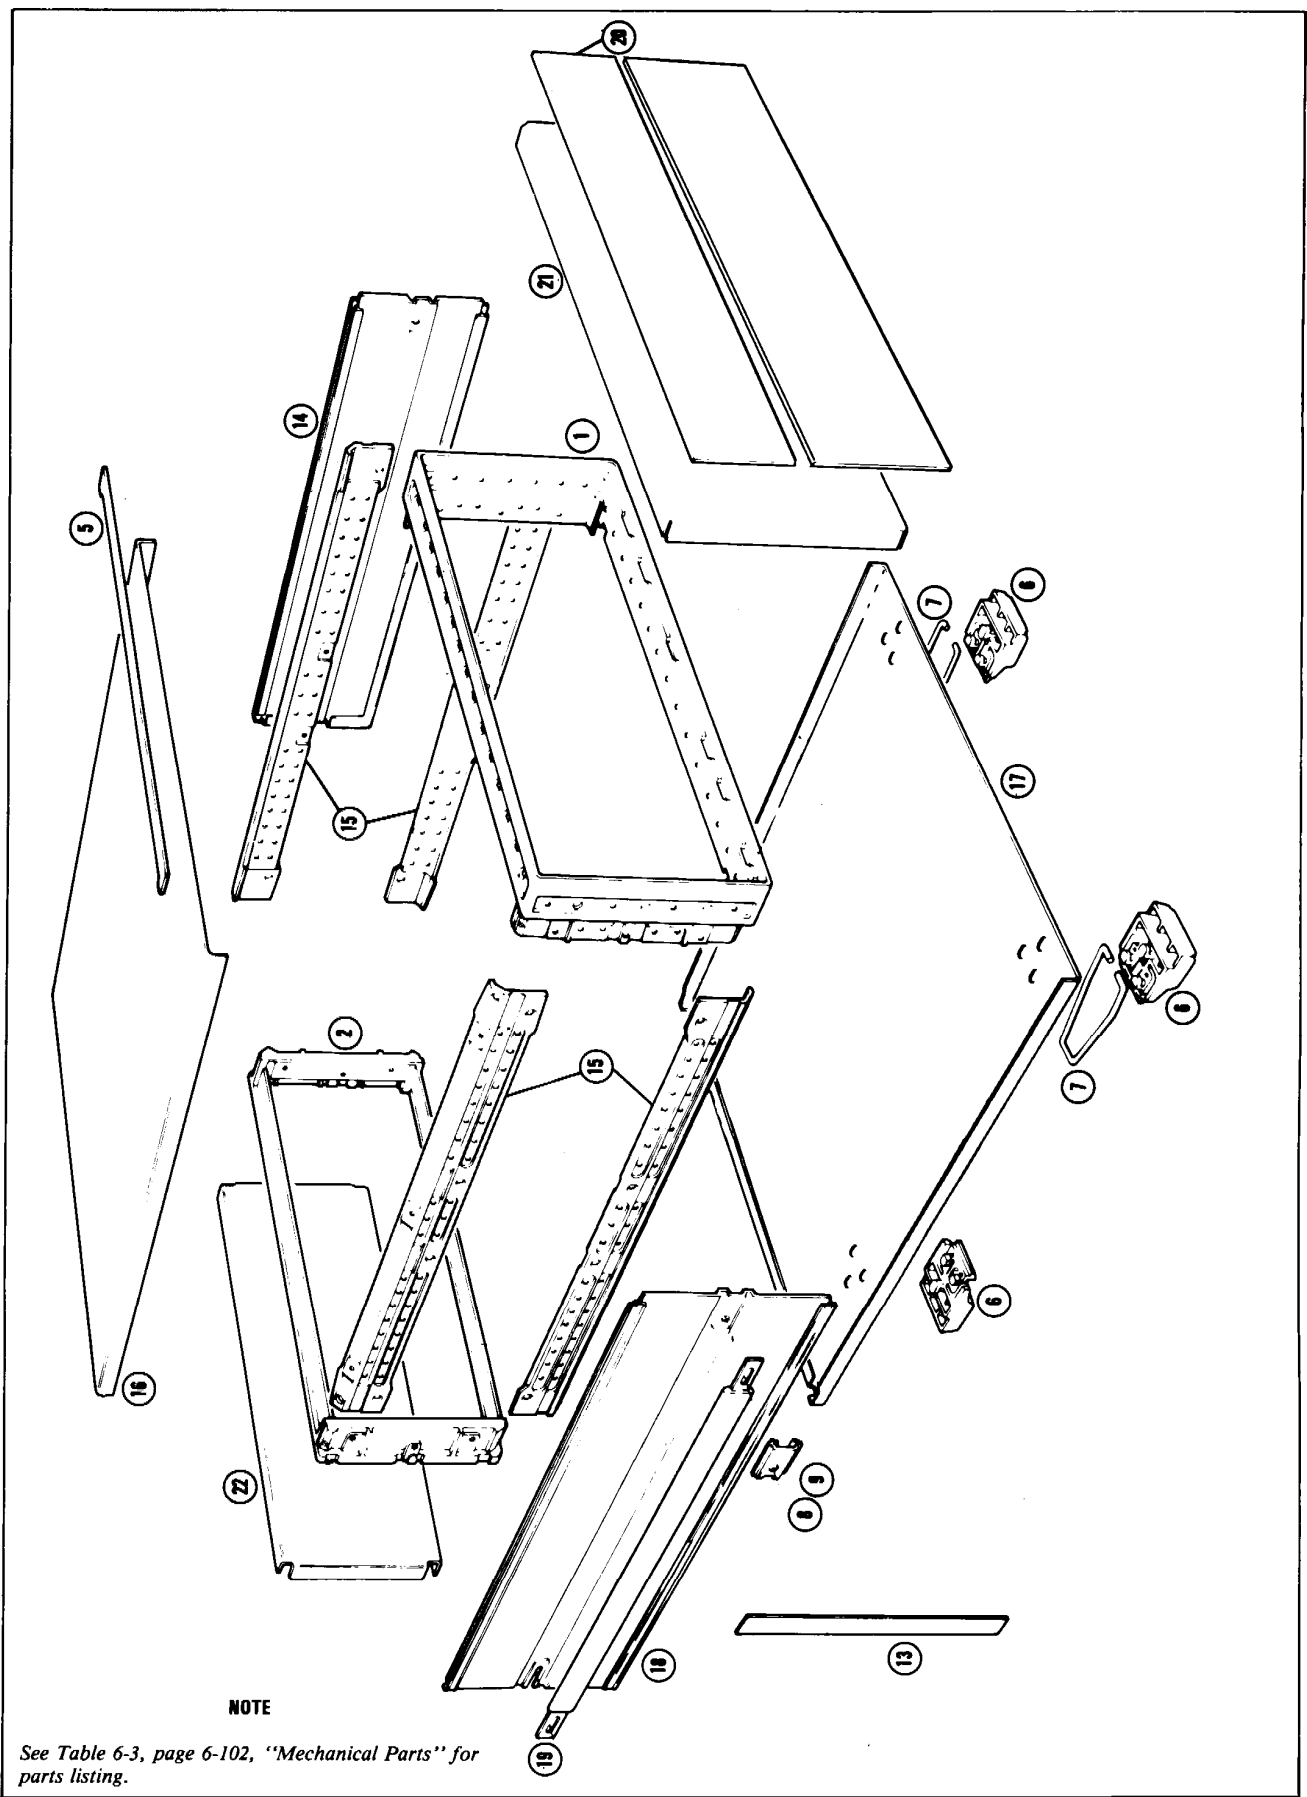

NOTE

See Table 6-3, page 6-102, "Mechanical Parts" for parts listing.

Figure 6-1. Mechanical Parts.

Table of Contents

| Paragraph | Page |
|---|------|
| 7-1. Introduction | 7-1 |
| 7-4. General Information | 7-1 |
| 7-7. Manual Changes | 7-1 |
| 7-10. Service Notes | 7-1 |
| 7-13. Backdating Information | 7-2 |
| 7-14. A1-Input Multiplexer ($\Delta 1$) | 7-2 |
| 7-25. A2-Input Amplifier ($\Delta 2$) | 7-6 |
| 7-33. A4-BBP/OVLD/CAL ($\Delta 3$) | 7-8 |
| 7-39. A5-Input Mixer | 7-10 |
| 7-42. A10-Second Mixer | 7-10 |
| 7-46. A11-Second Local Oscillator($\Delta 4$) | 7-11 |
| 7-48. A15-Tracking Output | 7-11 |
| 7-50. A16-10MHz Frequency Reference | 7-11 |
| 7-52. A20-IF Filter | 7-11 |
| 7-58. A21-IF Gain and Detection ($\Delta 5$) | 7-13 |
| 7-63. A22-Analog/Digital Converter ($\Delta 6$) | 7-13 |
| 7-75. A30-Fractional-N \div N ($\Delta 7$) | 7-21 |
| 7-78. A31-Fractional-N VCO | 7-21 |
| 7-80. A32-Fractional-N Phase Detector | 7-21 |
| 7-83. A40-Frequency Reference ($\Delta 8$) | 7-21 |
| 7-88. A50-Step Loop | 7-23 |
| 7-90. A51-Sum Loop VCO | 7-23 |
| 7-92. A52-Sum Loop Mixer | 7-23 |
| 7-94. A53-Sum Loop Phase Detector | 7-23 |
| 7-96. A60-Controller ($\Delta 9$) | 7-23 |
| 7-100. A61-HP-IB ($\Delta 10$) | 7-23 |
| 7-104. A70-Impairments (Option 003) ($\Delta 11$) | 7-23 |
| 7-124. A80-Power Supply ($\Delta 12$) | 7-32 |
| 7-129. A98-Switch/Display ($\Delta 13$) | 7-34 |
| 7-133. A99-Motherboard | 7-34 |
| 7-137. Miscellaneous Backdating | 7-34 |
| 7-139. Instrument Improvement Modification | 7-35 |
| 7-140. Distortion Characteristics | 7-35 |
| 7-142. Miscellaneous Improvements | 7-35 |

SECTION VII

MANUAL CHANGES

7-1. INTRODUCTION.

7-2. This section contains information for adapting this manual to instruments for which the content does not apply directly. It also includes information about recommended modifications for improvements to earlier instruments.

7-3. Backdating information is organized by printed circuit (PC) board with all applicable backdating information for a given PC board placed together for easy reference.

7-4. General Information.

7-5. All newer revision circuit boards are useable in older instruments. During early production runs, some later revision changes were made on existing revision boards. For example, some A20 boards were delivered which were marked "REV A" but which had the revision B changes incorporated by on-board modification. These boards are therefore electrically identical to the "REV B" boards which provided a new layout to incorporate the revision B changes. Backdated PC board component locator drawings are not provided except for boards which had extensive differences in component layout between revisions.

7-6. Refer to Table 7-1 for a listing of the current (May 1983) revision letter for each 3586 PC board. Future board revisions will be covered by yellow "MANUAL CHANGES" supplements. All delivered PC boards were at least revision A.

7-7. MANUAL CHANGES.

7-8. Future instrument changes and corrections/changes to the 3586 Service Manual will be in the form of yellow "MANUAL CHANGES" supplement sheets included with the manual at instrument delivery. For a copy of the most recent supplement to this manual, contact your nearest Hewlett-Packard Sales Office listed at the back of this manual.

7-9. To correct this manual for your particular instrument, locate all changes which affect your instrument serial number in the yellow supplement sheets and make those corrections in the manual itself.

7-10. SERVICE NOTES.

7-11. The instrument related service note is a publication available to all HP Service Centers and customers. The service note conveys service-related information that is intended to increase the reliability, improve the performance, or extend the usefulness of your HP instrument. Service notes function as an "after-sales" support interface to Hewlett-Packard, offering additional information relative to your instrument.

7-12. The service note index found at the end of this section briefly identifies the service notes available for the 3586A/B/C. Contact your nearest Hewlett-Packard Sales Office listed at the back of this manual for instructions on obtaining copies.

Table 7-1. Circuit Board Revisions.

| Part Number* | 3586 Model | Schematic Number | Service Group | Reference Designator | Revision # |
|--------------|------------|------------------|---------------|----------------------|------------|
| 66506 | A | 1A | A | A1 | B |
| 66501 | B | 1B | A | A1 | B |
| 66507 | C | 1C | A | A1 | D |
| 66502 | A/B | 2 | A | A2 | C |
| 66503 | C | 2 | A | A2 | C |
| 66504 | A/B | 18 | F | A4 | C |
| 66508 | C | 18 | F | A4 | C |
| 66505 | A/B | 3 | A | A5 | B |
| 66509 | C | 3 | A | A5 | B |
| 66510 | A/B/C | 4 | B | A10 | B |
| 66511 | A/B/C | 7 | B | A11 | A |
| 66515 | A/B/C | 19 | F | A15 | A |
| 66516 | A/B/C | 22 | H | A16 | A |
| 66520 | B | 5A | B | A20 | B |
| 66523 | A/B/C | 5B | B | A20 | B |
| 66524 | A/B | 5C | B | A20 | B |
| 66521 | A/B/C | 6 | B | A21 | B |
| 66522 | A/B/C | 8 | C | A22 | E |
| 66525 | B | 8 | C | A22 | E |
| 66526 | A/B | 8 | C | A22 | E |
| 66530 | A/B/C | 15 | E | A30 | A |
| 66531 | A/B/C | 16 | E | A31 | A |
| 66532 | A/B/C | 17 | E | A32 | B |
| 66540 | A/B/C | 21 | H | A40 | B |
| 66550 | A/B/C | 11 | D | A50 | A |
| 66551 | A/B/C | 12 | D | A51 | A |
| 66552 | A/B/C | 13 | D | A52 | A |
| 66553 | A/B/C | 14 | D | A53 | A |
| 66560 | A/B/C | 9A/B | C | A60 | A |
| 66561 | A/B/C | 23 | I | A61 | B |
| 66570 | B | 20A/B/C | G | A70 | D |
| 66571 | A | 20A/B/C | G | A70 | D |
| 66580 | A/B/C | 24 | J | A80 | C |
| 66594 | C | 10A/B | C | A98 | C |
| 66595 | A** | 10A/B | C | A98 | C |
| 66596 | A | 10A/B | C | A98 | C |
| 66597 | B | 10A/B | C | A98 | C |
| 66598 | B** | 10A/B | C | A98 | C |
| 66599 | A/B/C | 24 | J | A99 | C |

Notes:

1. Some PC boards with the same part number but different revision letters are electrically identical due to on-board modification.
2. *All part numbers are preceded by 03586-(Example: 03586-66506).
**Option 003.

7-13. BACKDATING INFORMATION.**7-14. A1-Input Multiplexer (Δ 1).**

7-15. There are three versions of the A1 board, depending upon instrument model or special options. The differences between boards are in the different input termination impedances available. Standard model configurations are:


| | |
|-------|-------------|
| 3586A | 03586-66506 |
| 3586B | 03586-66501 |
| 3586C | 03586-66507 |

7-16. A1 Backdating. Early instruments with the 66501 board had A1C13 of 1500pF. May be replaced in all instruments with 1000pF (Part Number 0160-0938) for improved flatness of 124 Ω input.


7-17. The revision B for the 66507 board corrected revision A layout errors only (no circuit or component changes).

7-18. Pages 8-A-13/8-A-14, 8-A-15/8-A-16, 8-A-17/8-A-18; Figures 8-A-2, 8-A-3, 8-A-4.


Instruments in the serial number range 1927A00375 and below, 1928A00392 and below and 1929A00249 and below may have implemented, one of the relay logic configurations shown below.

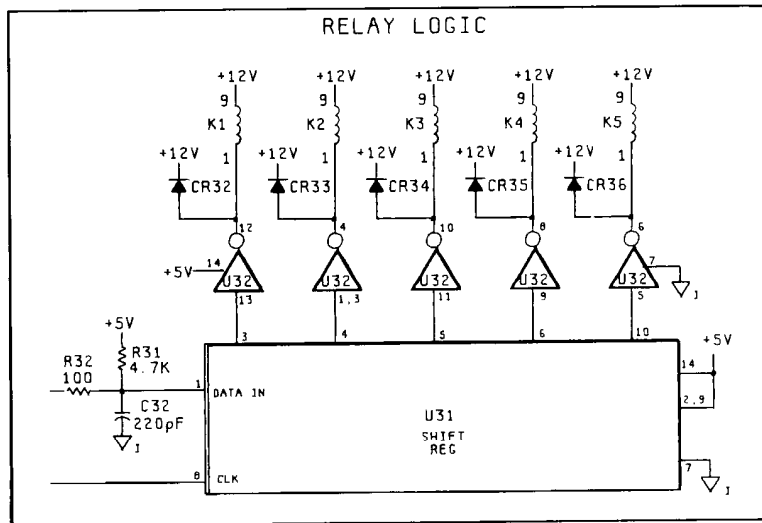

**Figure 7-1. Relay Logic
(03586-66501/66506) Revision A,
(03586-66507) Revision B.**

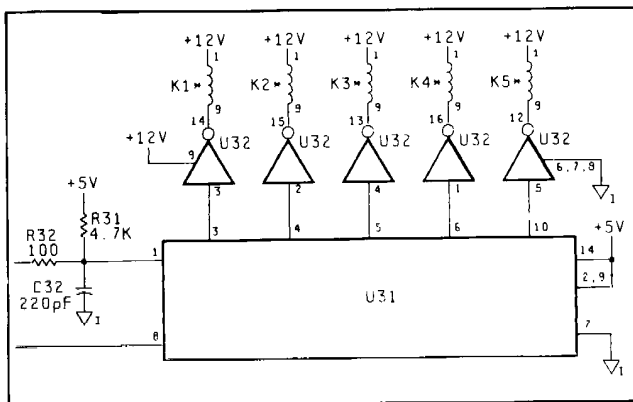


**Figure 7-2. Relay Logic
(03586-66501/66506) Revision B.**

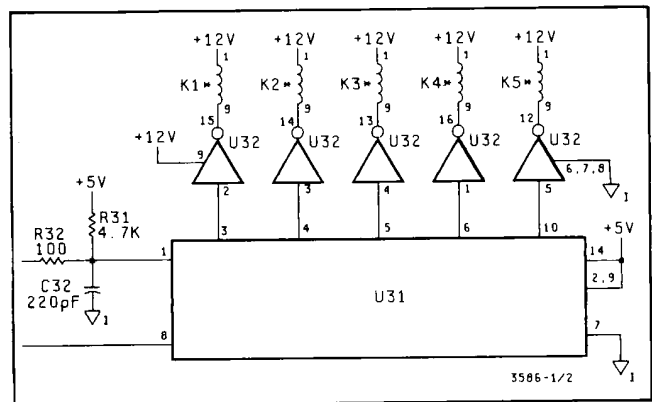


**Figure 7-3. Relay Logic
(03586-66507) Revision C.**

7-19. The 66507 revisions C and D and the 66501/66506 revision B boards have different circuit layouts to accommodate several types of replacement relays. They also have a different relay driver (U32), with different pin numbers than the U32 shown in Figure 7-1. This prevents direct replacement of the new U32 part into some of the earlier revisions. These newer revisions also do not have CR32-CR36 (P/N 1901-0040) installed since diode action is provided by the "new" U32 (P/N 1858-0047). While the parts are not interchangeable, the assemblies themselves are. When replacing U32 on instruments whose relay logic is configured as shown in Figure 7-1, use part number 1820-0471.


7-20. Instruments which contain the relay logic shown in Figure 7-1 are represented by the component locators shown in Figures 7-4, 7-5, and 7-6.

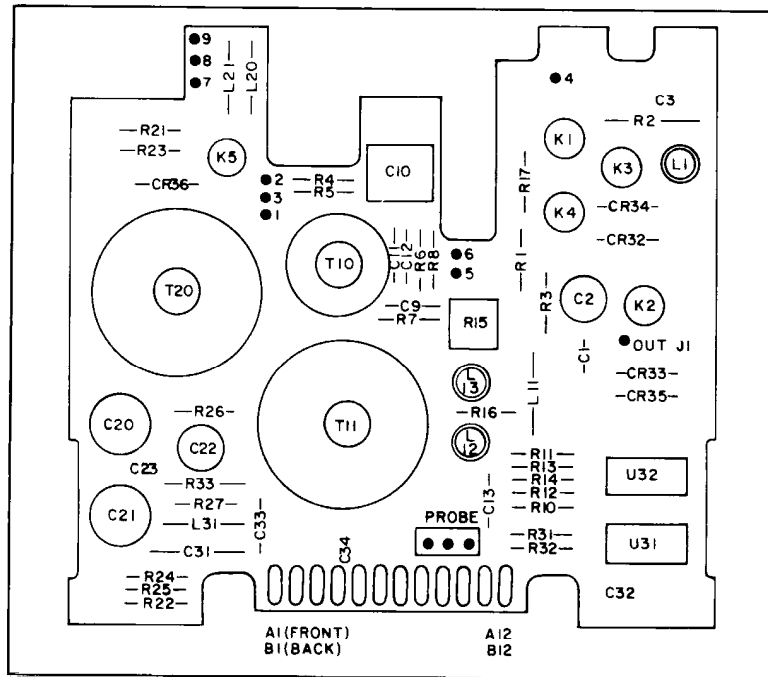

**Figure 7-4. 03586-66501
Revision A Component Locator.**

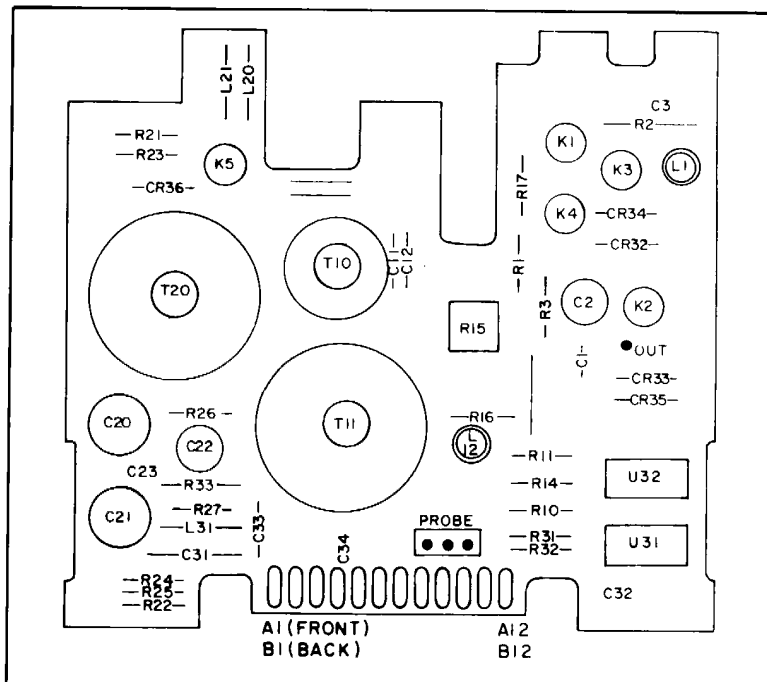

**Figure 7-5. 03586-66506
Revision A Component Locator.**

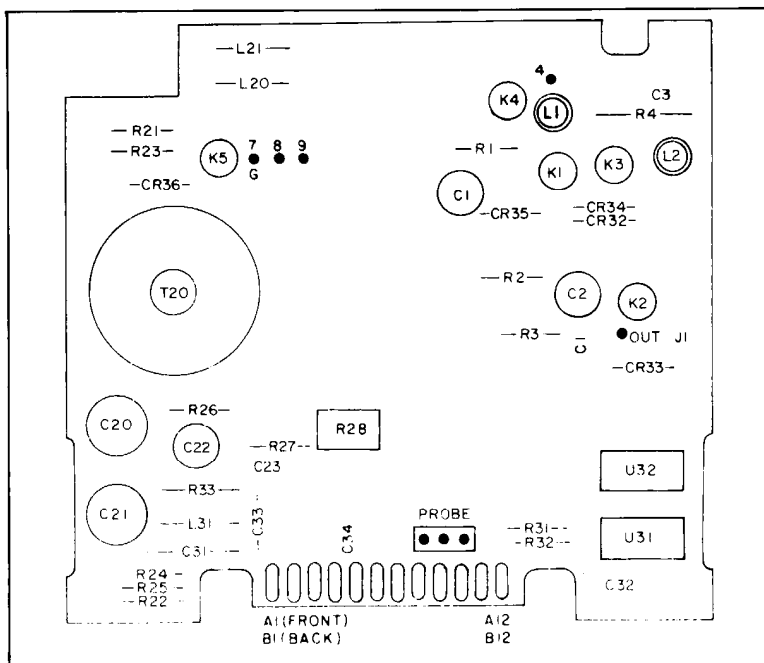


**Figure 7-6. 03586-66507
Revision B Component Locator.**

7-21. 3586A/B instruments with the relay logic shown in Figure 7-2 can use the component locator found on pages 8-A-13/8-A-14 and 8-A-15/8-A-16. Note that the only difference is that C35 is not included in these instruments.

7-22. 3586C instruments with the relay logic shown in Figure 7-3 can use the component locator found on page 8-A-17/8-A-18. Note that these instruments, however, do not have C35 or C36.

7-23. 3586C instruments (s/n 1929A00249 to 1929A00390) with 66507 revision C boards have A1C35 installed as shown in Figure 7-7. Instruments in this serial number range can use the component locator found on page 8-A-17/8-A-18. Note that these instruments do not have C36 and that C35 may be mounted on the circuit side of the PC board.

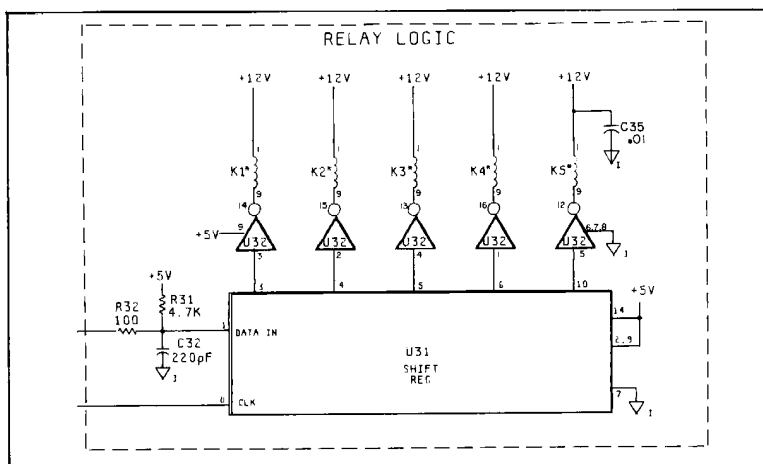

**Figure 7-7. Location Of A1C35
(03586-66507) Revision C.**

7-24. In certain 3586A/B/C instruments, A1C23 may be 200pF (p/n 0140-0198), 180pF (p/n 0140-0197), or 220pF (p/n 0160-0134).

7-25. A2-Input Amplifier (Δ2).

7-26. There are two versions of the A2 board, depending upon instrument model. The differences between boards are in component values only which affect stage gains. Standard model configurations are:

| | |
|---------|-------------|
| 3586A/B | 03586-66502 |
| 3586C | 03586-66503 |

7-27. **A2 Backdating.** Early instruments had different component values for R16,R31,R32 R33, and R38. When replaced all at one time, these components may be replaced with the current values shown in Table 6-3.

7-28. The revision B configurations for the 66502 and 66503 boards are electrically identical to revision A with on-board modifications. Revision B is primarily for a new layout. A2C32 was changed on revision B to improve frequency response. The value of A2C32 in Table 6-3 may be retrofitted onto all revision A boards.

7-29. Page 8-A-19/8-A-20, Figure 8-A-5.

Instruments in the serial number range 1927A00847 and below, 1928A01566 and below and 1929A00767 and below implement the relay logic shown in Figure 7-8. This range of instruments also does not contain A2R150, A2R151, or A2C100.

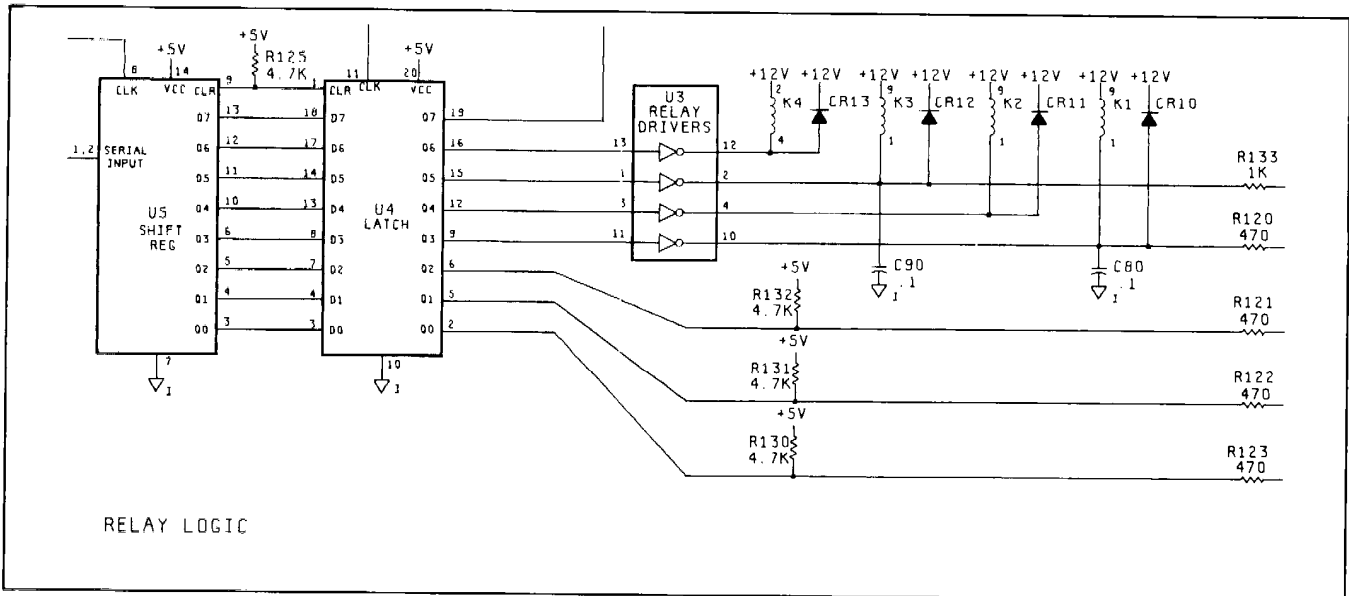


Figure 7-8. A2 Relay Logic Circuitry (Revision B).

7-30. The parts unique to the A2 relay logic circuitry (revision B) are summarized in Table 7-2.

Table 7-2. A2 Relay Logic Components (Revision B.)

| REFERENCE DESIGNATOR | DESCRIPTION | -hp- PART NUMBER |
|----------------------|-----------------------|------------------|
| A2C80 | Capacitor-Fxd .1μF | 0160-0576 |
| A2C82 | Capacitor-Fxd 200pF | 0140-0198 |
| A2C90 | Capacitor-Fxd .1μF | 0160-0576 |
| A2K1 | Relay 2C 12VDC-Coil | 0490-0508 |
| A2K2 | Relay 2C 12VDC-Coil | 0490-0508 |
| A2K3 | Relay 2C 12VDC-Coil | 0490-0508 |
| A2K4 | Relay 2C 12VDC-Coil | 0490-1221 |
| A2R120 | Resistor 470 .25w | 0683-4715 |
| A2R121 | Resistor 470 .25w | 0683-4715 |
| A2R122 | Resistor 470 .25w | 0683-4715 |
| A2R123 | Resistor 470 .25w | 0683-4715 |
| A2R125 | Resistor 4.7k .25w | 0683-4725 |
| A2R126 | Resistor 4.7k .25w | 0683-4725 |
| A2R127 | Resistor 100 .25w | 0683-1015 |
| A2R130 | Resistor 4.7k .25w | 0683-4725 |
| A2R131 | Resistor 4.7k .25w | 0683-4725 |
| A2R132 | Resistor 4.7k .25w | 0683-4725 |
| A2R133 | Resistor 1k .25w | 0683-1025 |
| A2U3 | IC INV TTL HEX 1 =INP | 1820-0471 |
| A2U4 | IC FF TTL LS D-TYPE | 1820-1730 |
| A2U5 | IC SHF-RGTR TTL | 1820-1433 |

7-31. For instruments in the range stated in paragraph 7-29, use the component locator shown in Figure 7-9.

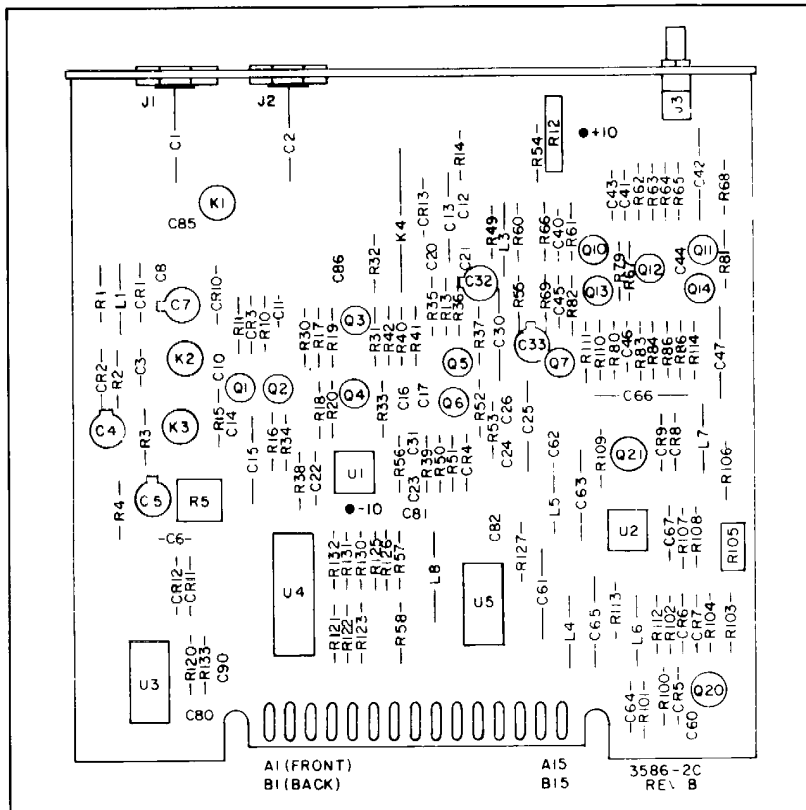


Figure 7-9. A2 Component Locator (Revision B).

7-32. In the Detailed Functional Description section of Volume II of the Service Manual, paragraph 8-130 applies to the above range of instruments with the exceptions shown in the following paragraph:

“The parallel eight bits from U5 are latched into U4 by the clock signal (ISO LATCH) from A60 through pulse transformer A99T3. Four of the outputs from U4 control relays K1-K4 through the open-collector drivers of U3. One of these, U3(10) goes logic LOW when CAL is selected, energizing K1 to bring in the CAL signal from the A4 board and at the same time sending a (L) CAL signal to A4 to turn on CAL. Also, anytime a Full Scale setting of +5dBm or higher is selected, 40dB of attenuation is required from the 0/20/40 dB circuits. Therefore U3(2) goes logic LOW causing K3 to energize (K2 will de-energize) and 40dB is selected. This same LOW signal is applied to A4 to select the high level CAL signal of -20dBm.”

7-33. A4-BBP/OVLD/CAL (Δ3).

7-34. There are two versions of the A4 board, depending upon instrument model. The differences between boards are in component values only which affect stage gains. Standard model configurations are:

| | |
|---------|-------------|
| 3586A/B | 03586-66504 |
| 3586C | 03586-66508 |

7-35. **A4 Backdating.** Early instruments had different component values for R43,R45,R49, R50,R104,R137, and R140. When these components are replaced all at one time, they may be replaced with the current values shown in Table 6-3.

7-36. The revision B change for the 66504 and 66508 boards provides different circuit configurations for the input circuits which pass the BBP RF signal to the Detector-Logger circuits. The old buffer circuit (revision A) is shown in Figure 7-10. Other circuits simply changed component values. Table 7-3 provides part numbers for revision A components. Figure 7-11 is the revision A component locator for A4 (both 66504 and 66508).

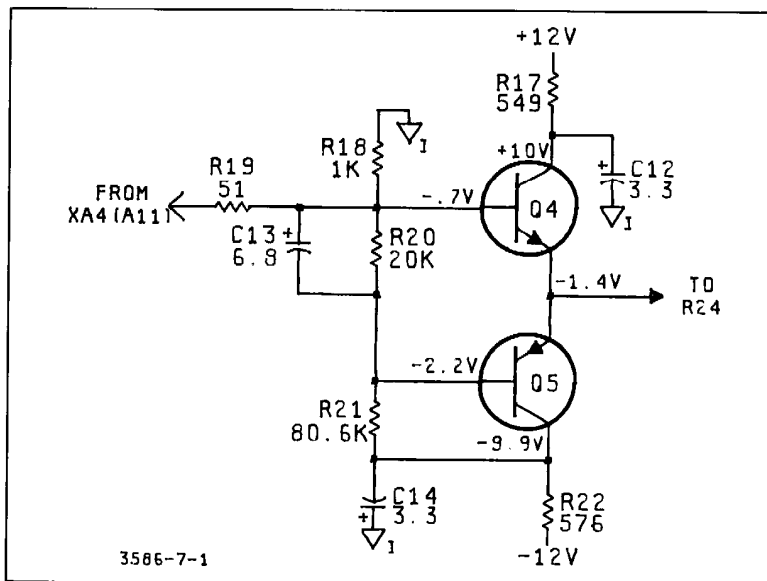


Figure 7-10. A4 Input Amplifier (BBP RF) Revision A.

Table 7-3. A4 Components (Revision A).

| Reference Designator | Description | -hp- Part Number |
|----------------------|------------------|------------------|
| A4R17 | R-F 549Ω, 1% | 0698-4456 |
| A4R18 | R-F 1KΩ, 1% | 0757-0280 |
| A4R19 | R-F 51Ω, 5% | 0683-5105 |
| A4R20 | R-F 20KΩ, 1% | 0757-0449 |
| A4R21 | R-F 80.6KΩ, 1% | 0698-4509 |
| A4R22 | R-F 576Ω, 1% | 0698-4457 |
| A4R25 | R-F 100Ω, 1% | 0757-0401 |
| A4R26 | R-F 2KΩ, 1% | 0757-0283 |
| A4C11 | C-F 4.7μF, 10V | 0180-0309 |
| A4C12 | C-F 3.3μF, 35V | 0180-0161 |
| A4C13 | C-F 6.8μF, 6V | 0180-1701 |
| A4C14 | C-F 3.3μF, 35V | 0180-0161 |
| A4Q4 | XSTR-NPN 61714 | 1854-0485 |
| A4Q5 | XSTR-PNP SPS6837 | 1853-0354 |

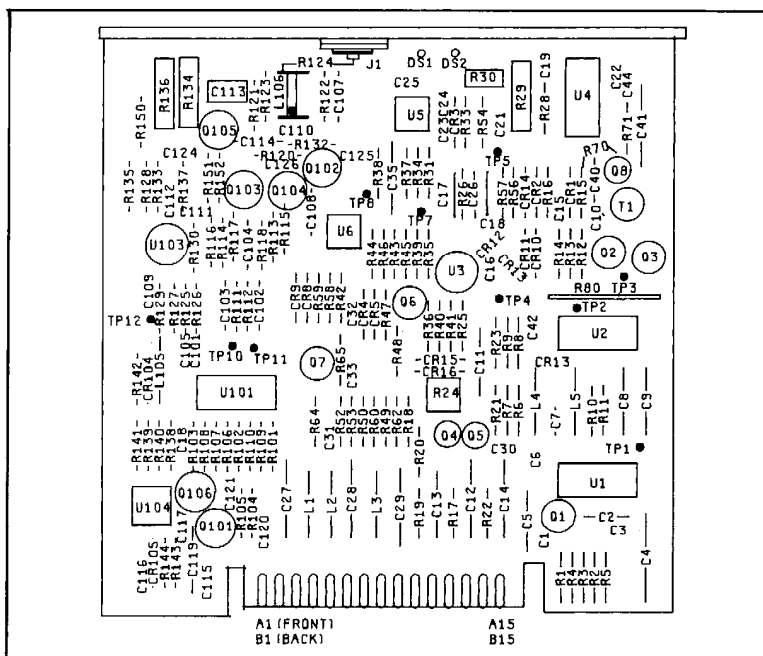


Figure 7-11. A4 Component Locator Revision A.

7-37. The revision C change for the 66504 and 66508 boards made minor hole changes and did not affect component values nor were there any circuit changes. The current schematic and component locator for A4 in Service Group F may be used for both revision B and revision C A4 boards. Note, however, that on some revision C boards, A4CR10-A4CR13 and A4R70 are mounted as shown in Figure 7-12.

7-38. Page 8-F-9/8-F-10, Figure 8-F-2.

For instruments in the serial number range 1927A00231 and below, 1928A00284 and below, and 1929A00195 and below, C40 is .22μF (p/n 0160-0170).

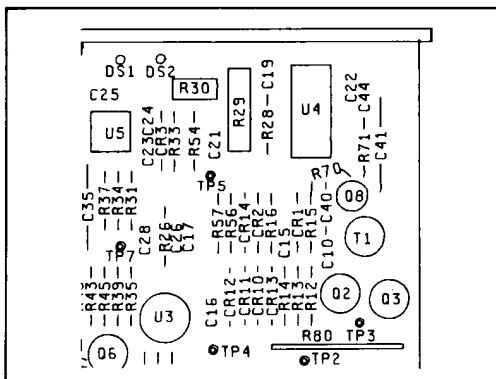


Figure 7-12.
Alternate Positioning Of
CR10-CR13 and R70.

7-39. A5-Input Mixer.

7-40. There are two versions of the A5 board, depending upon instrument model. The differences between boards are few. The 66509 is the same as the 66505 except for the following: (1) Different component values for R30 and R33; (2) R32 and R34 are not installed on the 66509 board. Standard model configurations are:

| | |
|---------|-------------|
| 3586A/B | 03586-66505 |
| 3586C | 03586-66509 |

7-41. **A5 Backdating.** Some revision B boards of the 66505 are electrically identical to revision A. The same is true for revisions A and B of the 66509 board. Revision B for both boards was simply a re-layout because of on-board modifications. Later changes to revision B components were value changes only. Earlier instruments therefore may have different value components for R10,R11,C52,C55,C58, and C62. When replaced all at the same time, these components may be replaced with the current values shown in Table 6-3. The revision B component locator on page 8-A-21 may also be used for revision A as actual component positions are approximately the same.

7-42. A10-Second Mixer (3586A/B/C = 03586-66510).

7-43. **A10 Backdating.** Early instruments may have different values for R31,R43 and R44. These components may be replaced all at once by current values shown in Table 6-3. Early instruments had a resistor (R20) on the 50MHz filter bypass line to ground. This resistor may be deleted as was done on later instruments. The revision B component locator may be used for revision A boards.

7-44. Revision A of the 66510 board did not have R24 installed and R23* went to ground. As a consequence, a different padding list was used for R23* (see Table 7-4).

Table 7-4. A10R23* Padding List (Revision A).

| Value | -hp- Part Number |
|-------|------------------|
| 374Ω | 0698-4452 |
| 402Ω | 0698-4453 |
| 422Ω | 0698-3447 |
| 453Ω | 0698-3510 |
| 499Ω | 0698-4123 |
| 523Ω | 0698-4454 |
| 549Ω | 0698-4456 |
| 576Ω | 0698-4457 |

7-45. The 66510 rev B board has C52 mounted horizontally beneath L104. All instruments with rev A boards and those with rev B boards and serial numbers prior to 1927A00396, 1928A00433, and 1929A00274 have C52 mounted vertically between R105 and L104. Mounting C52 horizontally was done to eliminate the problem of power supply noise being coupled into the ground for pin 2 of U101 causing the noise floor to be about 2dB higher for the 400Hz filter. With the exception of C52 the rev A and rev B component locators are identical and the component locator found on page 8-B-11/8-B-12 applies to all instruments.

7-46. A11-Second Local Oscillator (3586A/B/C = 03586-66511) (Δ4).

7-47. A11 Backdating. Page 8-B-21/8-B-22, Figure 8-B-6.

Instruments with serial numbers 1927A00405 and below, 1928A00458 and below, and 1929A00283 and below have different values and part numbers for L1, L2, R63, R80, and R81 than shown in Figure 8-B-6. For the above range of instruments, these components have the following values:

| | | |
|-----|-------|---------------|
| L1 | 4.3μH | p/n 9100-3547 |
| L2 | 4.3μH | p/n 9100-3547 |
| R63 | 1500Ω | p/n 0683-1525 |
| R80 | 1000Ω | p/n 0757-0280 |
| R81 | 1000Ω | p/n 0757-0280 |

Also, the instruments identified above have a 4.7μH inductor (L70) in place of R71 (on both the schematic and component locator).

7-48. A15-Tracking Output (3586A/B/C = 03586-66515).

7-49. There have been no changes to the A15 board since the first 3586A/B/C was delivered.

7-50. A16-10MHz Frequency Reference (3586A/B/C = 03586-66516).

7-51. A16 Backdating. Earlier instruments may have a different part number (LM358N, 1826-0346) installed for A16U2. This part may be directly replaced by IC358 (1826-0678).

7-52. A20-IF Filter.

7-53. There are three versions of the A20 board, depending upon instrument model and option selection. Standard model configurations are:

| | |
|------------------|--------------------------------|
| 3586A Standard | 03586-66524 (1740Hz Bandwidth) |
| 3586A Option 003 | 03586-66523 (3100Hz Bandwidth) |
| 3586B Standard | 03586-66520 (2000Hz Bandwidth) |
| 3586B Option 002 | 03586-66524 (1740Hz Bandwidth) |
| 3586B Option 003 | 03586-66523 (3100Hz Bandwidth) |
| 3586C | 03586-66523 (3100Hz Bandwidth) |

7-54. A20 Backdating. Some early revision A boards for the 66520, 66523, and 66524 had slightly different circuits for the ground isolation amplifier and for the 10/35dB amplifier (see Figure 7-13). Part numbers for components unique to those early boards are shown in Table 7-5.

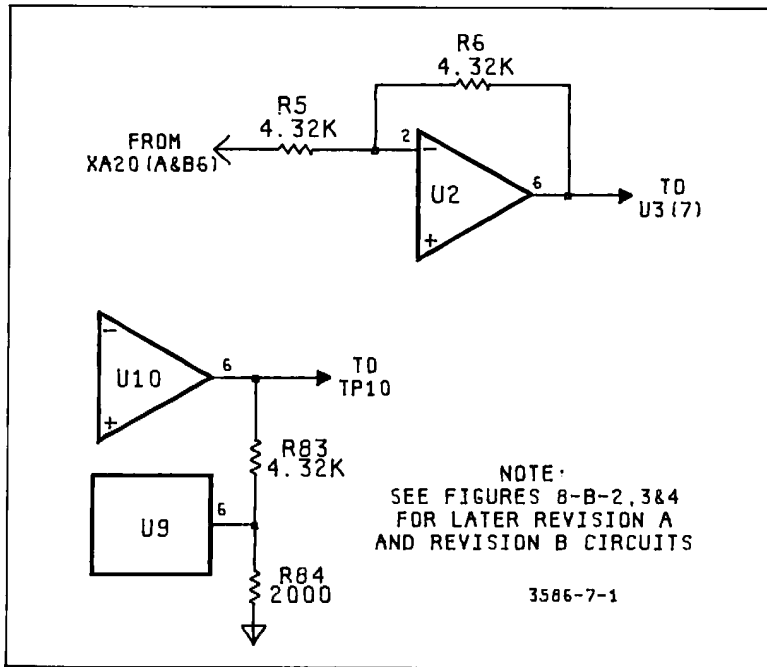


Figure 7-13. A20 Early Revision A Circuits.

Table 7-5. A20 Early Revision A Components.

| Reference Designator | Description | -hp- Part Number |
|---|--------------------|------------------|
| A20R5 | R-F 4.32K Ω | 0698-8059 |
| A20R84 | R-F 2000 Ω | 0698-6624 |
| Notes: 1. Table is for 66520, 66523, and 66524. 2. See Figure 7-13 for circuits using these components. | | |

7-55. Later revision A boards had the revision B changes incorporated by on-board modification. These boards are electrically identical to revision B boards.

7-56. Some revision A and revision B 66524 boards may have a different part number (L-V 305 μ H, 9140-0370) installed for A20L53. These parts may be directly replaced by L-V 279 μ H (9140-0369).

7-57. The revision B component locators for the 66520, 66523, and 66524 boards as shown on the Service Group B schematics can be used for early revision A boards by deleting the following items: CR1-CR4,R5,R9,R10,R85 and R86. These same deleted items form the revision B changes on the modified revision A boards and are located as follows:

1. Beneath U2 are CR1,CR2 and R9. To the right of them is R5.
2. R10 is located where R5 used to be.
3. R85 is just above C85 and R84 is moved to just above R85.
4. R86,CR3 and CR4 are to the right of C85.

7-58. A21-IF Gain and Detection (3586A/B/C = 03586-66521) (Δ5).

7-59. A21 Backdating. Revision A boards are electrically identical to revision B boards because of on-board modifications.

7-60. Some revision A and revision B boards may have a different part number (R-F 9.1k, 0683-9125) installed for A21R69. This part may be directly replaced by R-F 20K (0683-2035) provided the A70/A71 changes detailed in paragraph 7-108 are made at the same time.

7-61. The revision B component locator as shown on Figure 8-B-5 may be used for revision A boards with the following changes:

1. R68 is above Q2.
2. C30 is below and to the right of Q4.

7-62. Page 8-B-19/8-B-20, Figure 8-B-5.

Instruments with serial numbers 1927A00586 or below, 1928A00798 or below, or 1929A00423 or below do not have CR10.

7-63. A22-Analog/Digital Converter (Δ6).

7-64. There are three versions of the A22 board, depending upon instrument model and option selection. The only difference between versions is in sideband oscillator crystal frequencies. Standard model configurations are:

| | |
|------------------|----------------------|
| 3586A Standard | 03586-66526 (1740Hz) |
| 3586A Option 003 | 03586-66522 (3100Hz) |
| 3586B Standard | 03586-66525 (2000Hz) |
| 3586B Option 002 | 03586-66526 (1740Hz) |
| 3586B Option 003 | 03586-66522 (3100Hz) |
| 3586C | 03586-66522 (3100Hz) |

7-65. A22 Backdating. Some early revision A boards for the 66522, 66525, and 66526 may have a different part number (TTL INV 74LSO4N, 1820-1199) installed for A22U9. This part may be directly replaced with the current part number shown in Table 6-3.

7-66. The revision B component locator for the 66522, 66525, and 66526 boards as shown in Figure 8-C-2 may be used for the revision A boards with the following changes:

1. Replace Q1 with CR3.
2. See Figure 7-14 for layout of LSB/USB oscillator components on revision A boards.

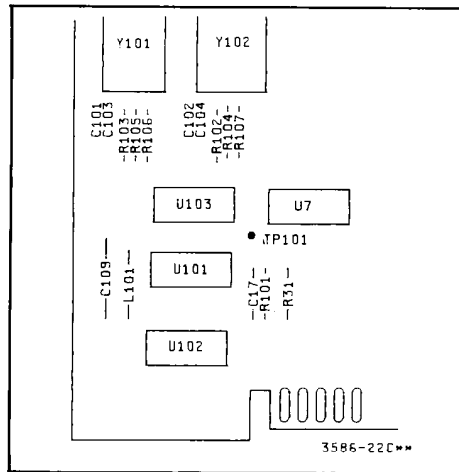


Figure 7-14. A22 (Revision A) Oscillator Component Locations.

7-67. The revision A for the 66522, 66525, and 66526 had a different design for the LSB/USB oscillator circuit. See Figure 7-15 for the revision A oscillator circuit. For part numbers of the components unique to revision A boards, see Table 7-6.

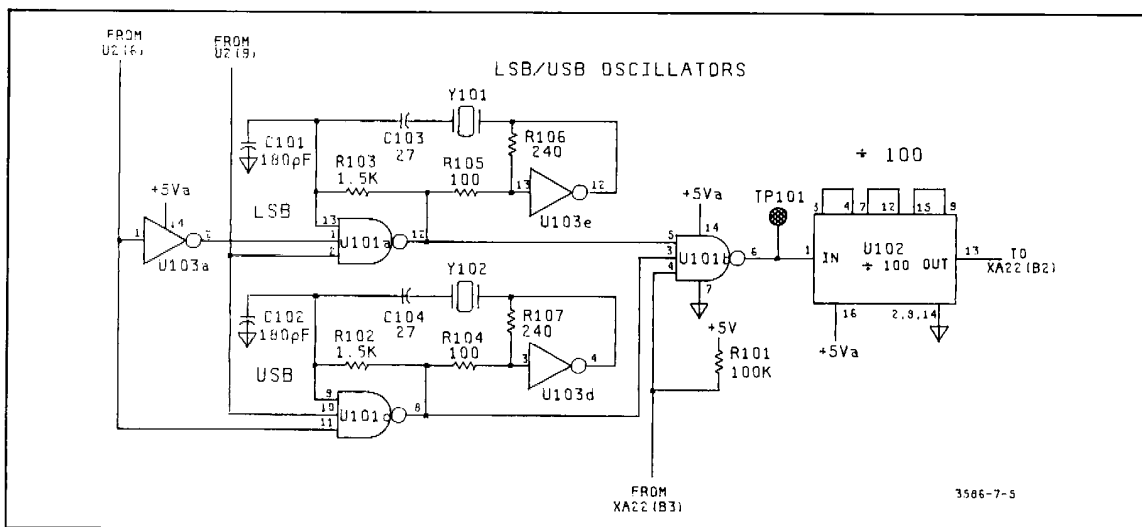


Figure 7-15. A22 (Revision A) LSB/USB Oscillator Circuit.

Table 7-6. A22 Revision A Components.

| Reference Designator | Description | -hp- Part Number |
|----------------------|-----------------|------------------|
| A22C101,102 | C-F 180pF 300V | 0140-0197 |
| A22C103,104 | C-F 27pF 300V | 0160-2306 |
| A22R102,103 | R-F 1500Ω 5% | 0683-1525 |
| A22R104,105 | R-F 100Ω 5% | 0683-1015 |
| A22R106,107 | R-F 240Ω 5% | 0683-2415 |
| A22U103 | IC INV 74LS04N | 1820-1199 |
| A22CR3 | Dio-SI .05A 30V | 1901-0040 |

7-68. On revision A boards, diode CR3 replaces Q1 on the A22 schematic (Figure 8-C-2). The cathode connects to U5(11) and the anode connects to U5(13).

7-69. Some early revision B boards had different part numbers (30pF, 0160-2199) installed for C101 and C102. They also did not have C103 and C104 installed at all. Current values for C101 and C102, as shown in Table 6-3, may be used if installed at the same time and if C103 and C104 are installed at the same time also (see Figure 8-C-2 for schematic).

7-70. Instruments with serial numbers equal or prior to 1927A00477, 1928A00622, and 1929A00309 may contain A22 boards which are revision B. Replace the schematic currently in Section VIII (A22 Rev. E) with Figure 7-16 (A22 Rev. B). Move A22 Rev. E to Section VII for instrument updating. See Table 7-7 for a listing of revision LSB/USB oscillator components.

NOTE

The revision letter (e.g., Rev A) shown under the component locator identifies the actual BOARD revision.

7-71. Instruments in the serial number range 1927A00478 to 1927A00506, 1928A00623 to 1928A00663, and 1929A00310 to 1929A00373 may contain A22 boards which are revision C. Replace the schematic currently in Section VIII (A22 Rev. E) with Figure 7-17 (A22 Rev. C). Move A22 Rev. E to Section VII for instrument updating.


7-72. The A22 revision D boards and revision E boards are electrically identical. The board went revision E following re-layout because of board modifications.

7-73. Referring to paragraph 8-173 in the “Detailed Functional Description” portion of Section VIII, for instruments with revision A or revision B A22 boards the seventh sentence of the paragraph should read: “During this one-half second, U11(9) and U11(4) are HIGH, gating the PLL output from U17(11) into U6”.

7-74. Referring to paragraph 8-181, for instruments with revision B boards, U103a and U103b are crystal controlled VCXO’s.

Table 7-7. A22 Revision B LSB/USB Oscillator Components.

| REFERENCE DESIGNATOR | DESCRIPTION | -hp- PART NUMBER |
|----------------------|--------------------|------------------|
| A22C101 | Capacitor-Fxd 24pF | 0160-0196 |
| A22C102 | Capacitor-Fxd 24pF | 0160-0196 |
| A22C103 | Capacitor-Fxd 56pF | 0140-0191 |
| A22C104 | Capacitor-Fxd 56pF | 0140-0191 |
| A22U103 | IC DUAL VCO | 1820-1424 |

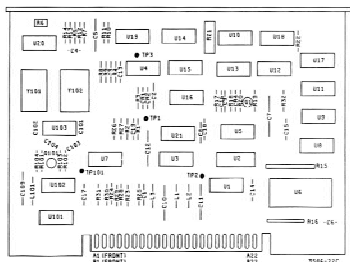

- NOTES:
- Y101/Y102 frequencies vary by PC board (and bandwidth).
- | Y101(Y02) | Y102(Y02) | Bandwidth | |
|-------------|-----------|-----------|--------|
| 03586-66522 | 1.3775MHz | 1.7475MHz | 3100Hz |
| 03586-66523 | 1.4125MHz | 1.7125MHz | 2000Hz |
| 03586-66526 | 1.4275MHz | 1.6975MHz | 1740Hz |
- Crystal frequencies are the only differences for the three versions of the A22 board listed above.


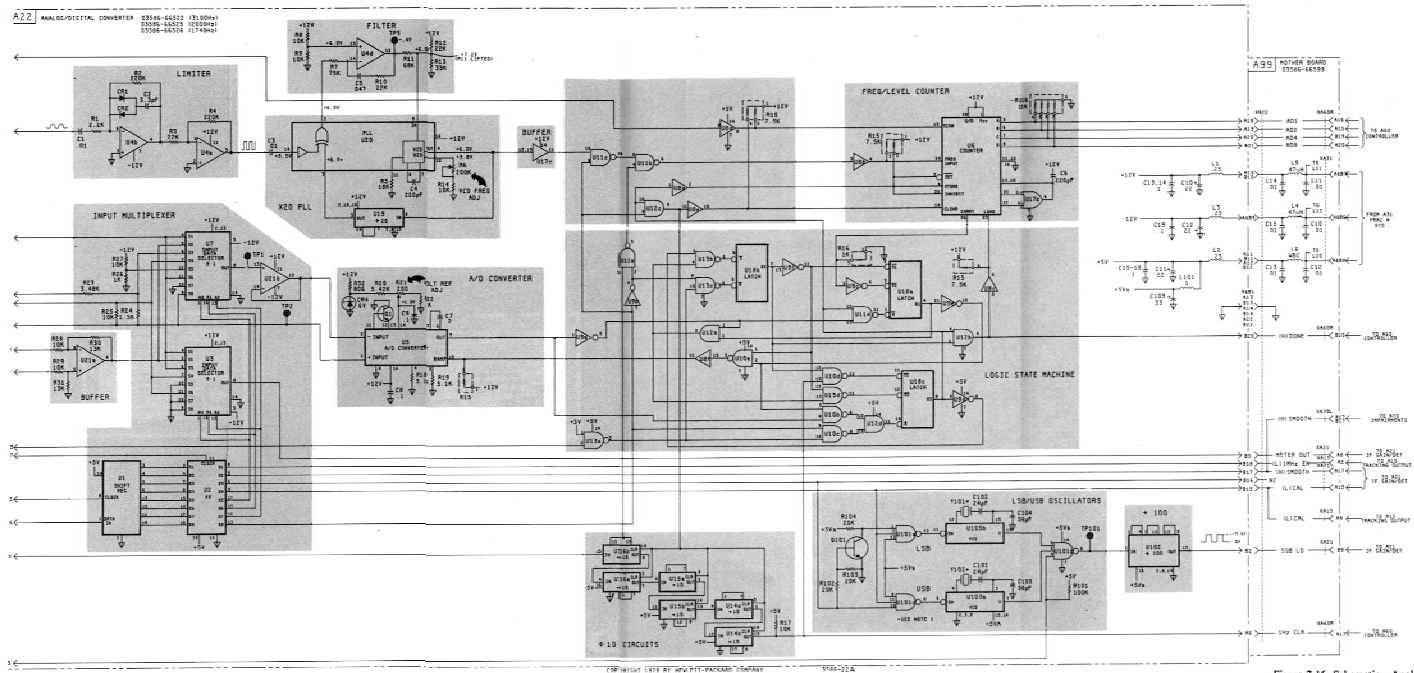


Figure 7-16. Schematic - Analog/Digital Converter (A22)
3-17/7-18



A22
 Jhp Part No. 03586-66522
 Rev C

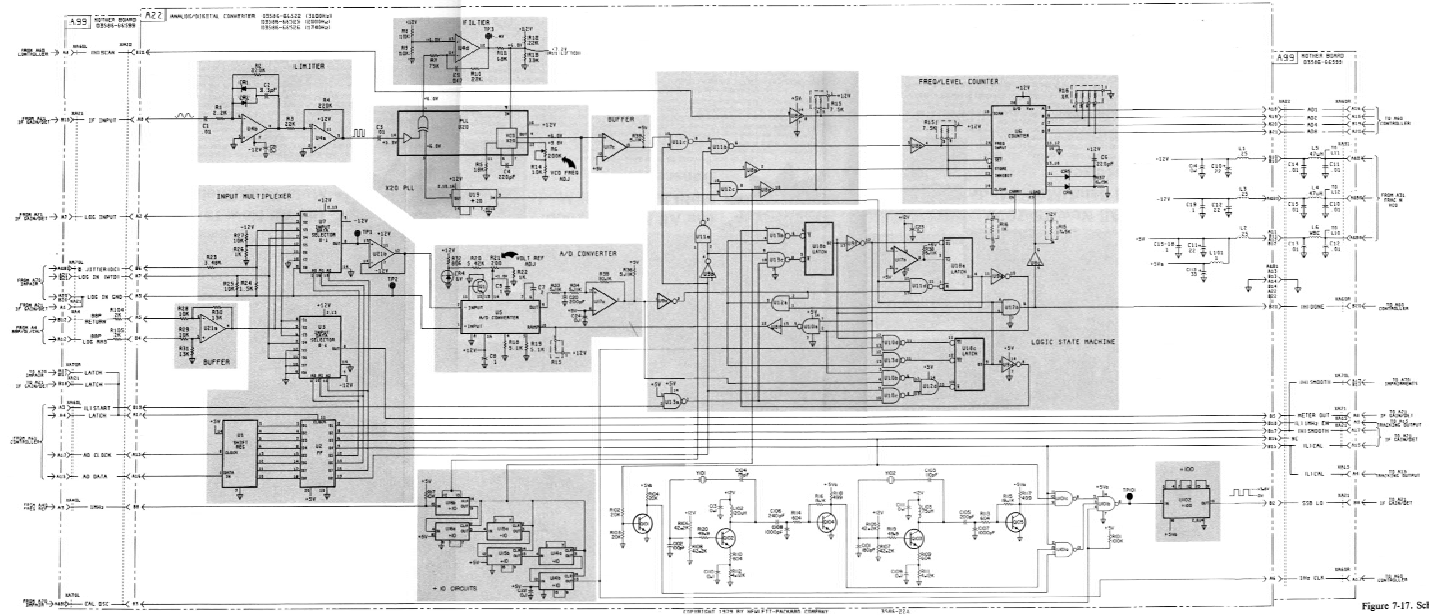


Figure 7-17. Schematic - Analog/Digital Converter (A22)
 7-197-20

7-75. A30-Fractional-N ÷ N (3586A/B/C = 66530). (Δ7)

7-76. A30 Backdating. Some earlier revision A boards had a different part number (TTL N82S90N, 1820-1155) installed for A30U3. This component may be replaced with the current part per Table 6-3.

7-77. Instruments with serial numbers prior to 1927A00255, 1928A00305, and 1929A00205 have an R2 of 8.66kΩ (p/n 0698-3498) and an R3 of 3.24kΩ (p/n 0698-4439).

7-78. A31-Fractional-N VCO (3586A/B/C = 03586-66531).

7-79. There have been no changes to the A31 board since the first 3586A/B/C was delivered.

7-80. A32-Fractional-N Phase Detector (3586A/B/C = 03586-66532).

7-81. A32 Backdating. The only difference between revision A and revision B boards is some minor relayout of circuit traces to reduce 100kHz spurs. Use the component locator on Figure 8-E-5 for both revision A and revision B boards.

7-82. Some revision A boards had a different part number (11kΩ, 0757-0433) installed for A32R101. This part may be replaced with a current value from Table 6-3 to assist in adjusting Fractional-N bias current.

7-83. A40-Frequency Reference (3586A/B/C = 03586-66540) (Δ8).

7-84. A40 Backdating. Some earlier instruments had a different part number installed for A40Q55 and A40Q56 (1855-0062). This part was replaced with the current part (1855-0386) which is more reliable and a direct replacement for the earlier component.

7-85. Instruments with serial numbers equal or prior to 1927A00817, 1928A01428, and 1929A00667 implement the “buffer” circuitry and “Lock Speed-Up” circuitry shown in Figures 7-18 and 7-19. The board went revision B when these changes occurred.

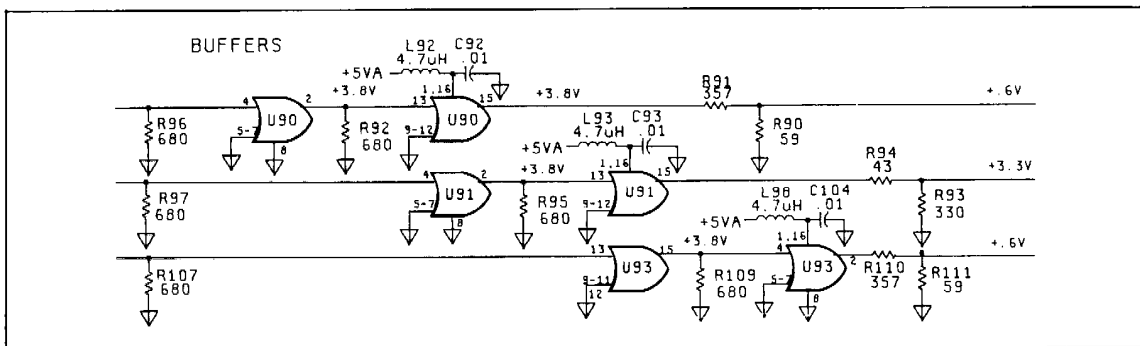


Figure 7-18. A40 Revision A Buffer Circuitry.

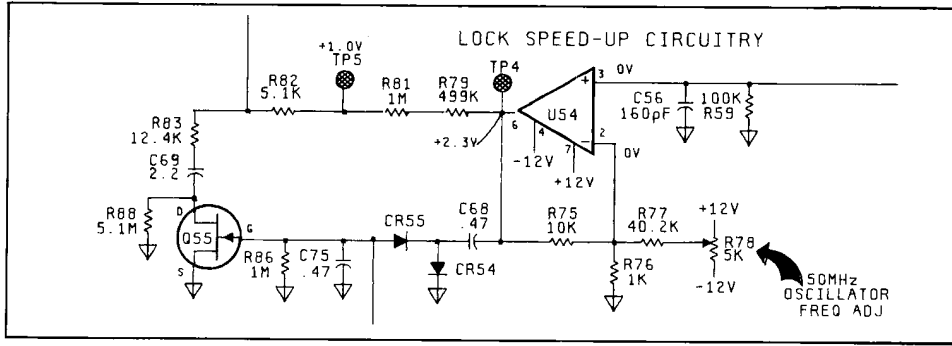


Figure 7-19. A40 Revision A Lock Speed-Up Circuitry.

7-86. Table 7-8 is a list of parts that pertain to the revision A buffer circuitry at the top of the schematic (Figure 8-H-1) but which have been deleted on revision B boards.

Table 7-8. Revision A Buffer Components.

| REFERENCE DESIGNATOR | DESCRIPTION | -hp- PART NUMBER |
|----------------------|--------------------------------|------------------|
| A40C93 | Capacitor-Fxd .01 μ F 100V | 0160-3879 |
| A40L93 | Coil 4.7 μ H | 9140-0144 |
| A40R92 | Resistor-Fxd 680 5% .25w | 0683-6815 |
| A40R95 | Resistor-Fxd 680 5% .25w | 0683-6815 |

7-87. Figure 7-20 is the component locator which applies to all revision A boards.

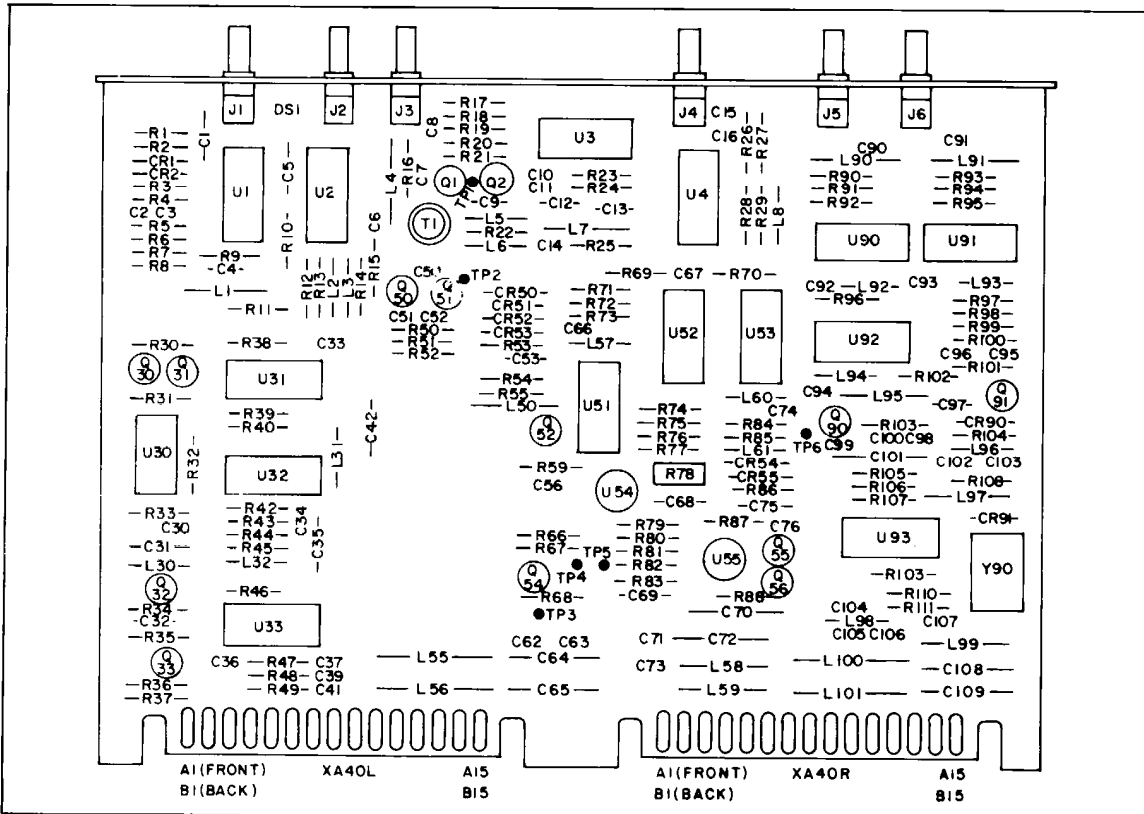


Figure 7-20. A40 Revision A Component Locator

7-88. A50-Step Loop (3586A/B/C = 03586-66550).

7-89. A50 Backdating. Earlier instruments may have a different part number (LM358N, 1826-0346) installed for A50U73. This part may be directly replaced by IC358 (1826-0678).

7-90. A51-Sum Loop VCO (3586A/B/C = 03586-66551).

7-91. A51 Backdating. Earlier instruments may have a different] part number (21.5Ω, 0698-3430) installed for A51R23. This part may be replaced with the current value per Table 6-3.

7-92. A52-Sum Loop Mixer (3586A/B/C = 03586-66552).

7-93. There have been no changes to the A52 board since the first 3586A/B/C was delivered.

7-94. A53-Sum Loop Phase Detector (3586A/B/C = 03586-66553).

7-95. A53 Backdating. Earlier instruments may have a different part number (LM358N, 1826-0346) installed for A53U3. This part may be directly replaced by IC358 (1826-0678).

7-96. A60-Controller (3586A/B/C = 03586-66560) (Δ9)

7-97. A60 Backdating. Some early A60 boards may have a different part number (1901-0040) installed for A60CR7. This part may be directly replaced by part number 1901-0535.

7-98. Some A60 boards may have revision A software ROM's (U7-U12) and some may have revision B software ROM's. See paragraph 8-C-27 for a discussion of the differences. Table 6-3 carries both sets of part numbers.

7-99. Instruments with serial numbers equal or prior to 1927A00212, 1928A00265, and 1929A00164 do not have A60R30.

7-100. A61 HP-IB (3586A/B/C = 03586-66561) (Δ10).

7-101. A61 Backdating. Some earlier A61 boards had a capacitor (C1, 2.2μF) installed from A61U1(4) to ground. This part may be deleted with no affect on A61 operation.

7-102. On some earlier A61 boards, A61U30(4,10) and A61U28(1) are open.

7-103. Instruments with serial numbers 1927A00822 and below, 1928A01500 and below, and 1929A00692 and below may contain a revision A A61 board and, therefore, it will not have A61R9, A61R10, or A61C1. The A61 board went revision B when these components were added. The revision B component locator otherwise applies to all revision A boards.

7-104. A70-Impairments (Option 003) (Δ11).

7-105. There are two versions of the A70 board depending upon model. The only differences between boards are in component values. Standard model configurations are:

| | |
|-------|---------------------------------|
| 3586A | 03586-66571 |
| 3586B | 03586-66570 |
| 3586C | (not available with Option 003) |

7-106. A70 Backdating. There were a few modified revision A boards delivered which are electrically identical to the early revision B boards because of on-board modification. See Figure 7-21 for the revision A component locator for both the 66570 and 66571 boards. See Figure 7-22 for the revision B component locator for both the 66570 and 66571 boards.

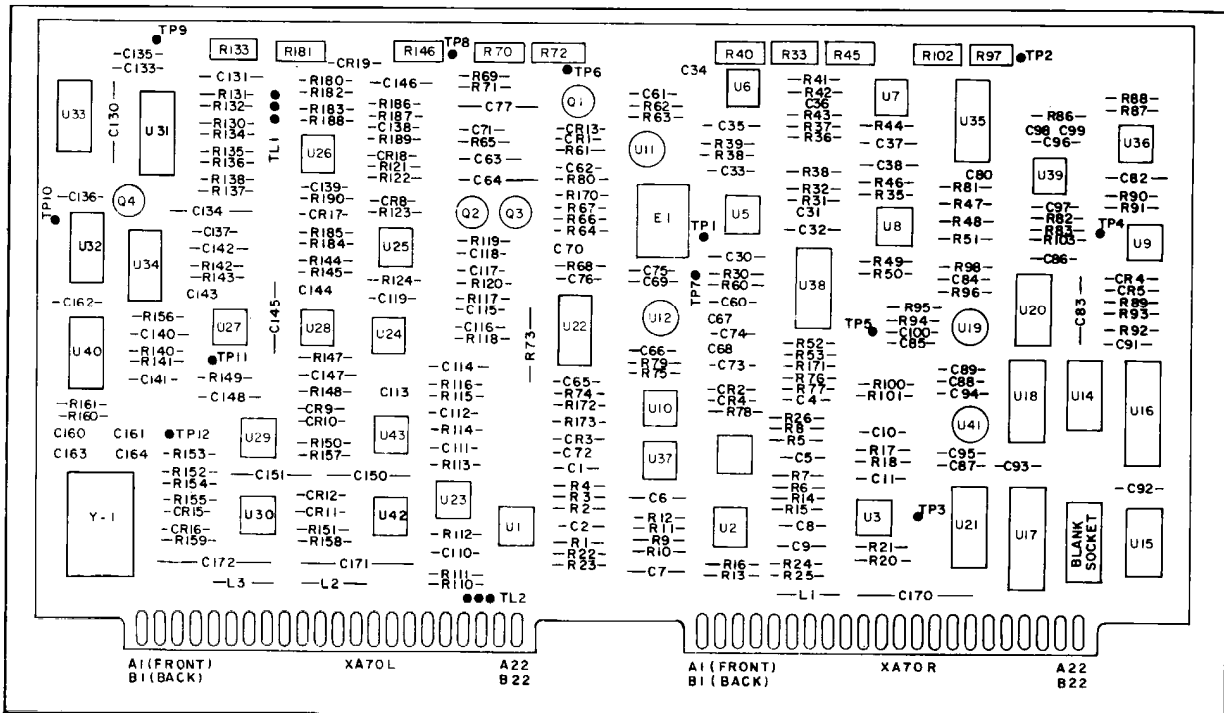


Figure 7-21. A70 Component Locator (Revision A).

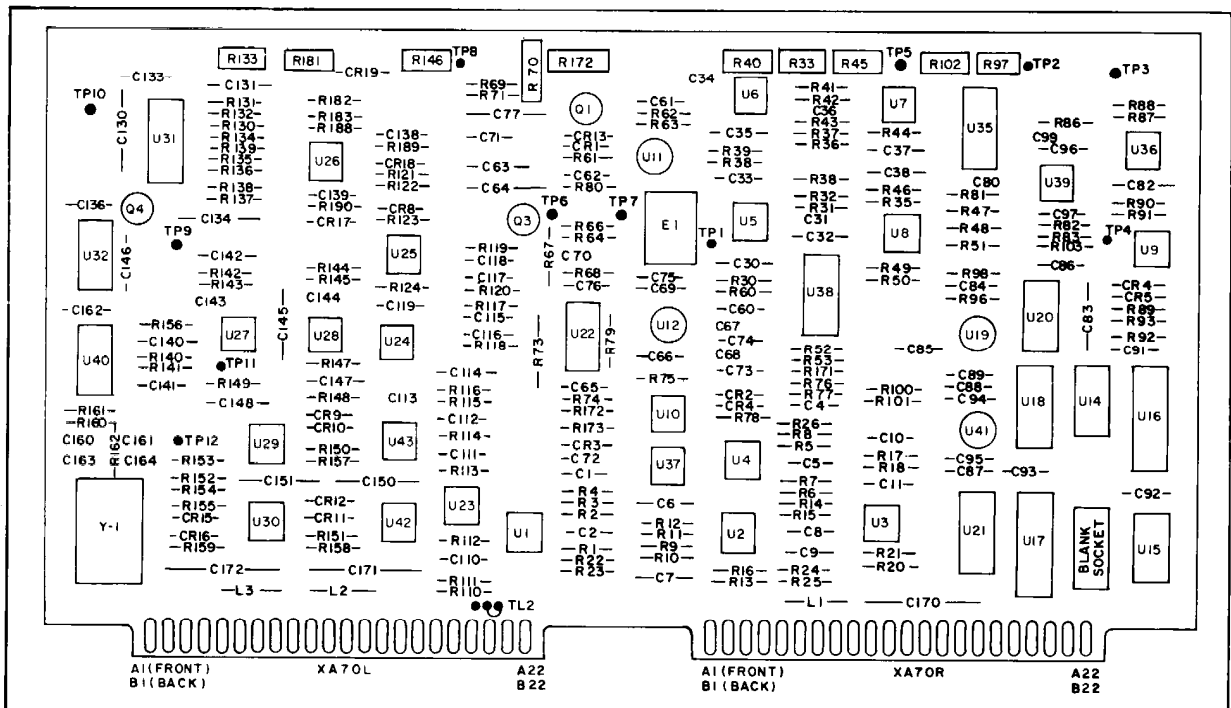


Figure 7-22. A70 Component Locator (Revision B).

Table 7-9. A70 Calibration Oscillator Components (Revisions A and B).

| Reference Designator | Description | -hp- Part Number |
|----------------------|----------------|------------------|
| A70C160,161,164 | C-F 180pF 300V | 0140-0197 |
| A70C163 | C-F 27pF 300V | 0160-2306 |
| A70R160 | R-F 750Ω 5% | 0683-7515 |
| A70R161 | R-F 100Ω 5% | 0683-1015 |
| A70R162 | R-F 240Ω 5% | 0683-2415 |
| A70U40 | IC SN74LS00 | 1820-1197 |

Notes:

1. C160 and Q5 as shown on revision C circuits in Service Group G were not installed on revision A and B A70 boards.
2. This table applies to both the 66570 and the 66571 boards.

7-107. The revision A and B A70 boards had a different circuit for the calibration oscillator (see Figure 7-23). Parts unique to this early oscillator circuit may be found in Table 7-9.

7-108. All revision A, all revision B, and some revision C A70 boards may have different part number components installed for A70R52 (37.4kΩ, 0698-4495) and A70R53 (10kΩ, 0757-0442). These parts may be replaced with the current values shown in Table 6-3 if A21R69 is changed at the same time (see paragraph 7-60).

7-109. Some early revision C boards had a different part number (30pF, 0160-2199) installed for A70C160. This part may be replaced by the current value shown in Table 6-3.

7-110. Early A70 boards had 20 pin sockets installed for U16 and U17. Replacement sockets may be ordered under part number 1200-0700.

7-111. Early revision A, B, and C boards may have a different part number (IC LF13331N, 1820-1795) installed for A70U35. This part may be directly replaced by IC 13331 (1826-0416).

7-112. Some early revision C boards did not have A70C161 installed. It was added to eliminate hand picking other circuit components. Also some early revision C boards may have a different part number (51kΩ, 0683-5135) installed for A70R71. To provide more adjustment range for U22, this part may be replaced by part number 0683-2035 (20kΩ).

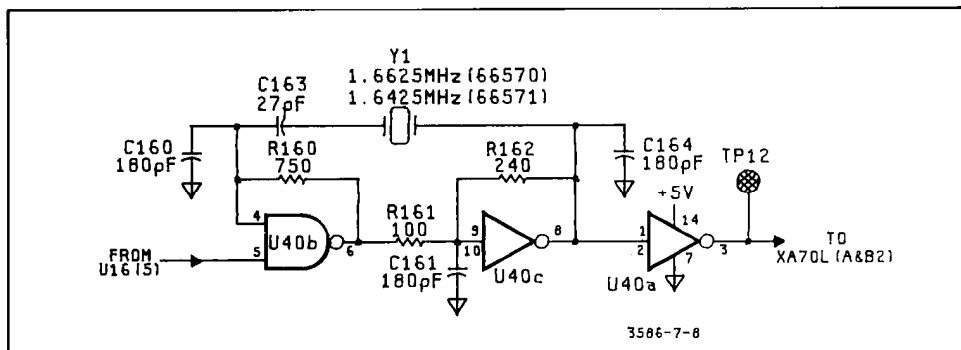


Figure 7-23. A70 Calibration Oscillator (Revisions A and B).

7-113. Instruments with serial numbers equal or prior to 1927A00540 and 1928A00718 and which are equipped with option 003 (Impairments), may contain revision A, B, or C A70 boards. If so, replace the schematic (20A) currently in Section VIII (A70 Rev. D) with Figure 7-24 (A70 Rev. C). Move the A70 revision D schematic to Section VII for instrument updating.

NOTE



The revision letter (e.g., Rev A) shown under the component locator identifies the actual BOARD revision.

7-114. Table 7-10 contains the parts unique to the A70 revision C board.

Table 7-10. A70 Revision C Components.

| REFERENCE DESIGNATOR | DESCRIPTION | -hp- PART NUMBER |
|----------------------|---------------------------------|------------------|
| A70C148 | Capacitor-Fxd 2.2 μ F 20VDC | 0180-0197 |
| A70R143 | Resistor-Fxd 174k .125w | 0698-4524 |
| A70U32 | IC Gate CMOS EXCL-OR QUAD 2-INP | 1820-1601 |
| A70CR17 | Diode-Switching 80V 200mA | 1901-0050 |
| A70CR18 | Diode-Switching 80V 200mA | 1901-0050 |
| A70R183 | Resistor-Fxd 10.7k .125w | 0698-4478 |
| A70R123 | Resistor-Fxd 20k .125w | 0757-0449 |
| A70R122 | Resistor-Fxd 100k .125w | 0757-0465 |
| A70R124 | Resistor-Fxd 44.2k .125w | 0698-4207 |
| A70C119 | Capacitor-Fxd 4000pF 100VDC | 0160-2587 |
| A70U25 | IC OP AMP GP DUAL 8-DIP-P | 1826-0326 |
| A70R119 | Resistor-Fxd 12.1k .125w | 0757-0444 |
| A70R120 | Resistor-Fxd 412k .125w | 0698-4540 |
| A70C118 | Capacitor-Fxd 4000pF 100VDC | 0160-2587 |
| A70C117 | Capacitor-Fxd 4000pF 100VDC | 0160-2587 |
| A70R117 | Resistor-Fxd 31.6k .125w | 0698-3160 |
| A70R118 | Resistor-Fxd 88.7k .125w | 0698-4512 |
| A70C116 | Capacitor-Fxd 4000pF 100VDC | 0160-2587 |
| A70C115 | Capacitor-Fxd 4000pF 100VDC | 0160-2587 |
| A70R116 | Resistor-Fxd 43.2k .125w | 0757-0456 |
| A70R115 | Resistor-Fxd 97.6k .125w | 0698-4513 |
| A70R114 | Resistor-Fxd 52.3k .125w | 0757-0272 |
| A70R113 | Resistor-Fxd 61.9k .125w | 0757-0460 |
| A70R112 | Resistor-Fxd 46.4k .125w | 0698-3162 |

7-115. When the A70 board went revision D, none of the circuitry depicted on schematic 20B (A70) changed. Therefore, the schematic currently in Section VIII (A70 rev. D) applies to revision C boards as well.

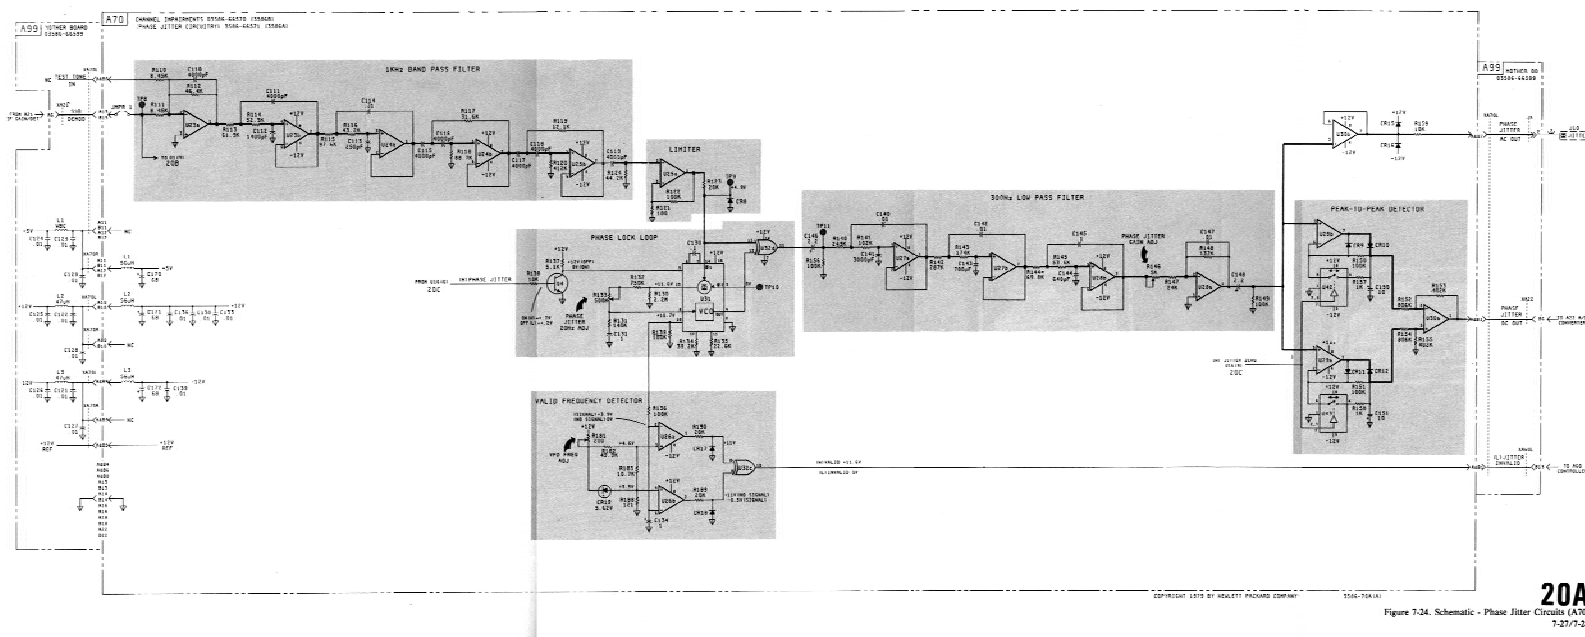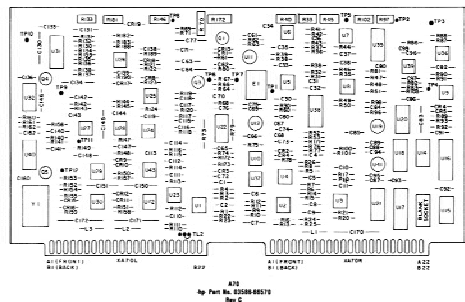

DESIGNED BY HELETTI PACQUARI COMPANY 1546-7541A1
 Figure 7.24. Schematic - Phase Jitter Circuits (A709 7-27-73B)

7-116. The revision C A70 board had different D/A and Calibration Oscillator circuitry than the revision D board shown in Figure 8-G-3. Refer to Figures 7-25 and 7-26 and Table 7-11 for the circuits and parts which are unique to the revision C boards. See also Figure 7-27 for the revision C component locator for both the 66570 and 66571 boards.

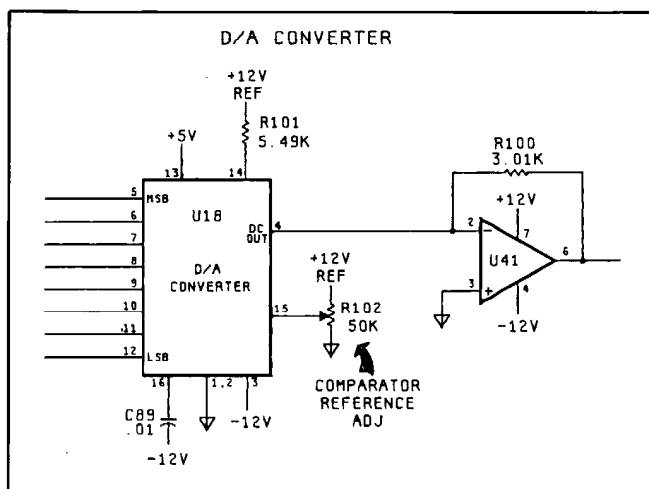


Figure 7-25. A70 Revision C D/A Converter Circuitry.

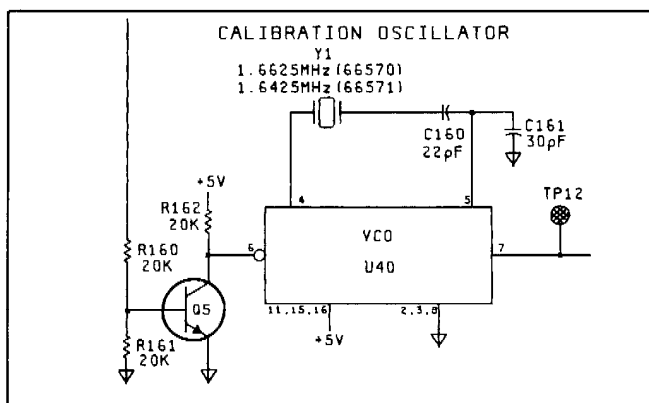


Figure 7-26. A70 Revision C Calibration Oscillator Circuitry.

Table 7-11. A70 Revision C Components.

| REFERENCE DESIGNATOR | DESCRIPTION | -hp- PART NUMBER |
|----------------------|---------------------------|------------------|
| A70R101 | Resistor-Fxd 5.49k .125w | 0698-3382 |
| A70R102 | Resistor-Var 50k | 2100-3354 |
| A70R160 | Resistor-Fxd 20k .25w | 0683-2035 |
| A70R161 | Resistor-Fxd 20k .25w | 0683-2035 |
| A70R162 | Resistor-Fxd 20k .25w | 0683-2035 |
| A70C160 | Capacitor-Fxd 22pF 500VDC | 0160-2265 |
| A70C161 | Capacitor-Fxd 30pF 300VDC | 0160-2199 |
| A70U40 | IC DUAL VCO | 1820-1424 |

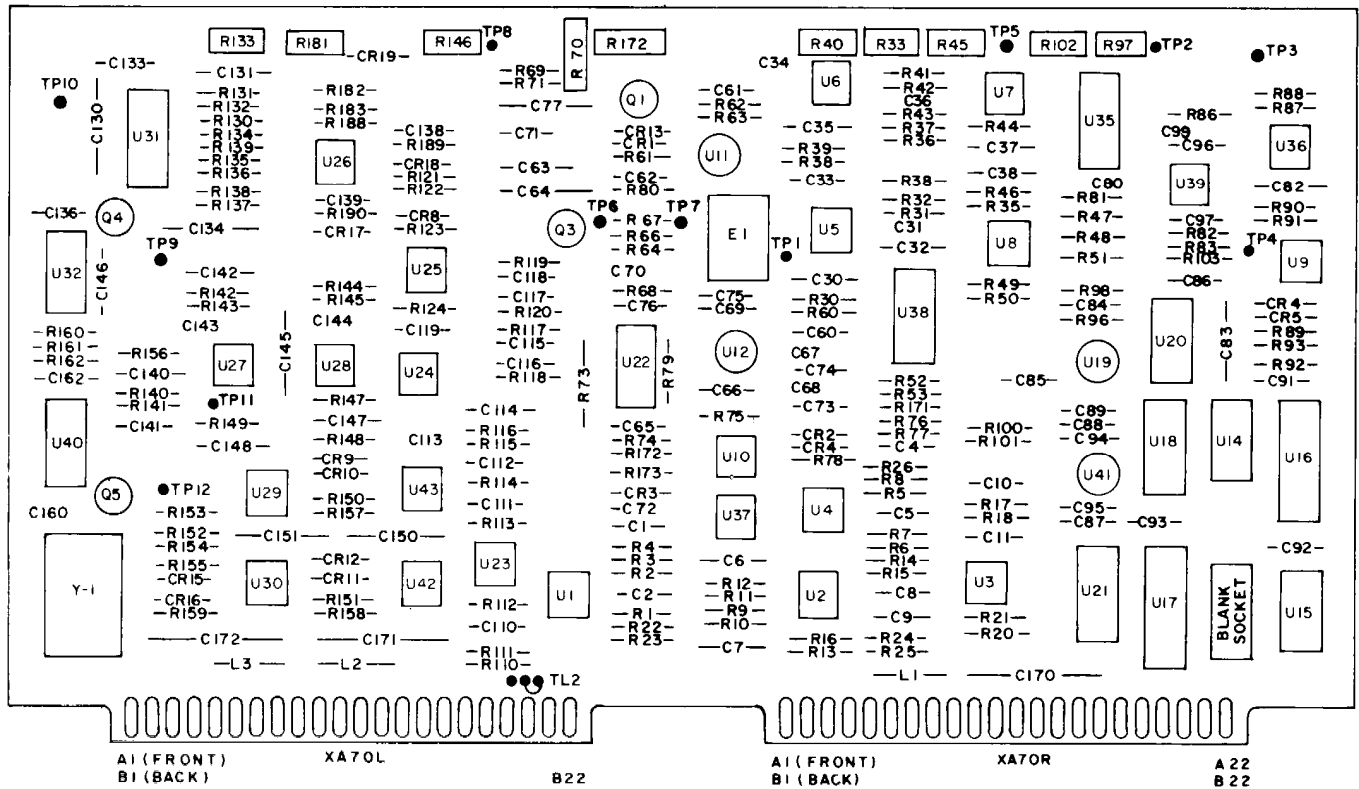


Figure 7-27. A70 Revision C Component Locator.

7-117. For instruments with serial numbers 1927A00541 to 1927A00602 and 1928A00719 to 1928A00818 A70R125 is 500kΩ (p/n 2100-3357) and A70R126 is 33.2kΩ (p/n 0757-0454).

7-118. For instruments with a revision C A70 board, paragraphs 8-277 and 8-278 in the “Detailed Functional Description” section should read as follows:

8-277. The incoming SSB DEMOD audio is bandwidth-limited for normal channel sideband audio, but is a 1004 Hz (BELL) or 1010 Hz (CCITT) tone for phase jitter tests. The tone is applied to a band-pass filter that is centered on 1000 Hz and is 1000 Hz wide so that it passes 500-1500 Hz. Over-all filter gain is +15 dB provided by the input amplifier U23a. The sinewave output of the filter is applied to a Limiter (U25a) which converts it to a square wave from 0 volts base to +12 volts peak.

8-278. The 1004/1010 Hz square wave (with phase jitter) becomes one input to the phase detector half of U31. It is also applied to exclusive-OR gate U32d. The other input to the phase detector is the output of the VCO in U31 which also feeds U32d. The VCO output is also 1004/1010 Hz but without any phase jitter. The phase-locked loop (PLL) has a $\div N = 1$ and is therefore locked to the test tone frequency and tracks it even if it drifts. The exact frequency of the tone is not critical to phase jitter measurements because the next operation is to demodulate the phase jitter sidebands from their “carrier”, the test tone, and to measure only the jitter. This is accomplished by U32d which acts as another phase detector. The output of U32d is a 2008/2020 Hz signal plus the demodulated phase jitter sidebands. The frequency range of interest for phase jitter sidebands is from 20 Hz to 300 Hz. The 20 Hz lower limit of the jitter range is adjusted in the loop filter in the PLL. The high end of the range is obtained by passing the output of U32d through a 300 Hz Low Pass Filter (LPF). The VCO in U31 is enabled only when Q4 is turned on under control of the processor (0 JITTER selected on the front panel).

7-119. For instruments with a revision C A70/71 board, paragraph 8-280 should read as follows:

8-280. An additional output of U31 (pin 10) is a DC voltage related to the VCO error voltage. This voltage is fed to a dual-comparator circuit used as a Valid Frequency Detector. U26(1) is normally HIGH and U26(7) is normally LOW, therefore U32(10) is normally HIGH (frequency valid). If the VCO is running outside a 100 Hz “window” of 960-1060 Hz, either U26(1) will trip LOW (frequency > 1060 Hz) or U26(7) will trip HIGH (frequency < 960 Hz) and U32c, being an exclusive-OR gate will trip LOW (frequency invalid) since both inputs are now the same. This signal (L) JITTER INVALID is passed to the processor which displays the error code E2.3 in the MEASUREMENT/ENTRY display area as long as the tone is invalid and the Ø JITTER measurement mode is selected. An adjustment is provided (R181) to move the center frequency of the 100 Hz window.

7-120. For instruments with a revision C A70/71 board, paragraph 8-288 should read as follows:

8-288. Calibration Oscillator. The USB and LSB oscillators used as the SSB LO during normal operations produce an 1850 Hz tone when beating against the second IF frequency. This tone would not be usable for calibration of the weighted filter since some of its level would be clipped by the filter. Therefore a separate calibration oscillator (U40b and U40c) is used to generate an SSB LO frequency in CAL that will be 1000 Hz (3586B) or 800 Hz (3586A) after mixing with the second IF frequency and which will provide accurate calibration of the weighted filter.

7-121. For instruments with a revision C A70/71 board, paragraph 8-289 should read as follows:

8-289. U40(7) is always HIGH except during the CAL cycle. When CAL occurs, U40(6) goes LOW allowing the circuit to oscillate at the frequency of 1.6625 MHz (3586B) or 1.6425 MHz (3586A). This frequency is passed out U40(7) to the A22 board where it is divided by 100 to produce 16.625 kHz or 16.425 kHz which will become the SSB LO frequency. When beat against the second IF (15.625 kHz), a 1000 Hz or 800 Hz audio tone is produced which becomes the SSB DEMOD signal input to the A70 board in CAL.

7-122. For instruments with a revision C A70/71 board, paragraph 8-G-21 in Service Group G should read as follows:

8-G-21. Error Code E 2.3 is an indication that the tone frequency upon which phase jitter measurements are being attempted is not within 960-1060Hz and therefore is not valid. If the tone is known to be within this range, A70R181 may need adjusting. This pot moves a 100Hz “window” all at once. For example, if the present limits for a valid signal were 900-1000Hz, adjusting A70R181 could move the window back to 960-1060Hz where it belongs. When the tone is valid, the voltage at U26(2/6) will be between that at U26(3) and U26(5). U32(8) will be LOW, U32(9) will be HIGH and U32(10) will be HIGH (valid). If the voltage at U26(2/6) exceeds that of either comparator reference, that comparator will trip and pins 8 and 9 of U32 will then either both be HIGH or both LOW causing U32(10) to go LOW (invalid).

7-123. For instruments with a revision C or earlier A70 board, paragraph 8-G-35 in Service Group G should read as follows:

8-G-35. To check the Impulse circuits up to the Comparator (U19) inputs, use the following procedure.

1. Perform steps 1-4 of paragraph 8-G-14.
2. TP2 should have a 1850Hz signal at about 10.8Vp-p.
3. TP4 should have the same signal rectified or about 5.4V (peak) and double the number of positive peaks (3700Hz).
4. TP5 should have +5 vdc ($\pm 0.10V$) for a 3586B. A 3586A should read +6.25 vdc ($\pm 0.25V$).
5. Select IMPULSE mode and press START.
6. TP5 should read about +3.65 vdc (THRESHOLD should still be 0dBm and Full Scale should be 0dBm from step 1 above).
7. Select other values of THRESHOLD settings from Table 8-G-4 and check TP5 for the approximate voltage indicated. Note that the voltage difference from instrument to instrument for any one frequency and full scale setting may cover $\pm 3dB$ of CAL error. The CAL constant is **always** added to the value supplied to the D/A Converter as a reference for the Comparator (U19) and it cannot be zeroed out. However, the relative readings for sequential threshold steps within one instrument should remain about the same for a given frequency and full scale setting. Table 8-G-4 gives typical values for comparison purposes **only**. If the values for TP6 change with threshold changes and correspond approximately with Table 8-G-4, it shows that U14-U18 and U41 are probably all working.
8. The D/A Converter (U18) output as seen at TP5 is scaled at 1 count (input) = about 19.5 millivolts (output) for a 3586B and about 24.0 millivolts for a 3586A. Scaling for U18 is controlled by R102 which is normally adjusted to provide +5 vdc $\pm 0.1V$ at TP5 (for a 3586B) with all 1's on the eight input lines of U18 (pins 5-12). For a 3586A, R102 is adjusted to provide +6.25 vdc $\pm 0.25V$ at TP5. Then, for example, at a threshold setting of -11dB below full scale, if the input lines to U18 (TTL logic) at pins 5-12) (MSB→LSB) read 00110100_2 (64_8 or 52_{10}), the voltage at TP5 should be approximately +1.014 VDC ($52 \times 19.5mV$) for a 3586B and approximately +1.248 VDC ($52 \times 24.0mV$) for a 3586A.

7-124. A80-Power Supply (3586A/B/C = 03586-66580) ($\Delta 12$).

7-125. A80 Backdating. Revision A and Revision B of the 66580 board are electrically identical but their layouts are different. Use Figure 7-28 for component location on a revision A board.

7-126. All revision A boards and some revision B boards did not have A80CR11 installed. It may be added to allow the CMOS memories on A60 to operate if battery A80BT1 is open or removed.

7-127. For instruments in the serial number range 1927A00359 and below, 1928A00392 and below, and 1929A00249 and below, A80R5 and A80R30 are $4.7k\Omega$ (p/n 0683-4725). Some earlier instruments, however, had R5 ($3k\Omega$) and R30 ($3k\Omega$) installed on a selected basis.

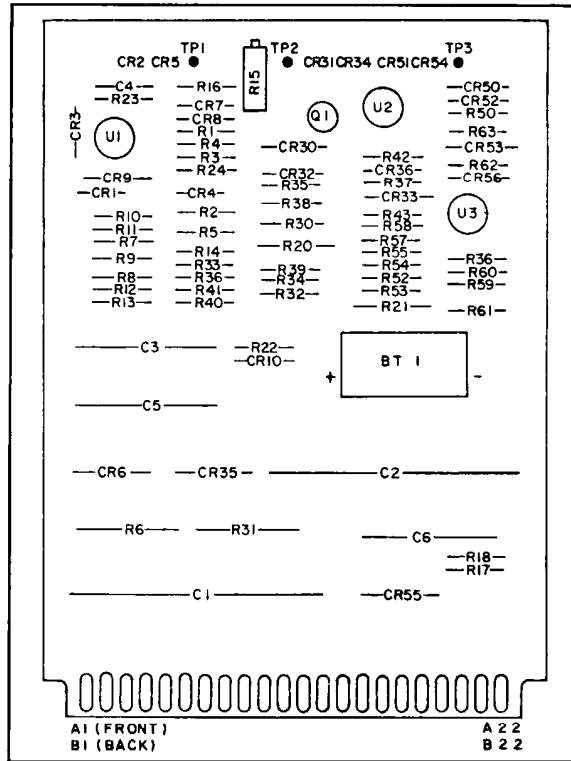


Figure 7-28. A80 Component Locator (Revision A).

7-128. The A80 board went revision C following a re-layout. The revision C board is electrically identical to revisions A and B. Use Figure 7-29 for component location on a revision B board.

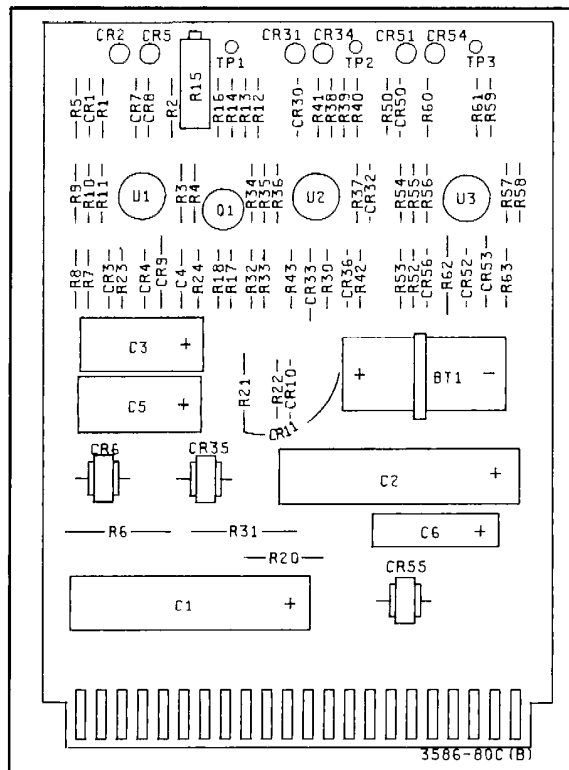


Figure 7-29. A80 Component Locator (Revision B).

7-129. A98-Switch/Display (Δ13).

7-130. There are five versions of the A98 board depending upon model and option. The only differences among the versions is in the quantity of switches and/or annunciators installed on a given board. The 66598 is the only version of the A98 board that has the maximum possible number of switches and annunciators. Standard model configurations are:

| | |
|------------------|-------------|
| 3586A Standard | 03586-66596 |
| 3586A Option 003 | 03586-66595 |
| 3586B Standard | 03586-66597 |
| 3586B Option 003 | 03586-66598 |
| 3586C | 03586-66594 |

7-131. A98 Backdating. Revision A and revision B A98 boards are electrically identical and use the same component locator diagrams (Service Group C). Note that the revision A and revision B boards, however, do not contain A98R21-A98R25 or A98CR307.

7-132. Instruments with serial number 1927A00798 or below, 1928A01179 or below, and 1929A00553 or below do not have A98R21-A98R25. These instruments also do not have A98CR307. The A98 board went revision C when these components were added.

7-133. A99-Motherboard (3586A/B/C = 03586-66599).

7-134. A99 Backdating. Revision A, revision B, and revision C motherboards are electricaly identical. The revision A board had the +15V regulator (U2) added via on-board modification and the revision B was a re-layout to accommodate U2 and some minor trace and hole changes. Revision C incorporated larger connectors (more pins) for increased current capacity (parallel wiring). The revision A and B boards were modified using bypass wiring to correct the current overload condition. Revision C also added fuses in the + and - 23 volt supplies.

7-135. Replacement connectors for revision A and B motherboards can be ordered under the following part numbers:

| | |
|--------------------------|-----------|
| A99J2 (10 pin connector) | 1251-4536 |
| A99J3 (11 pin connector) | 1251-4885 |

7-136. Matching cable connectors for the on-board connectors are:

| | |
|--------------------------|-----------|
| A99P2 (10 pin connector) | 1251-3537 |
| A99P3 (11 pin connector) | 1251-4886 |

7-137. Miscellaneous Backdating.

7-138. Early instruments may have a different part number (DIO-BKDN 1N3997R, 1902-1232) installed for CR20 which is mounted on the Darlington Transistor Assembly (see Figure 8-J-2). This zener was rated at 5.6V and drew an excessive amount of current, sometimes causing ripple on the +5V regulated supply. It may be directly replaced by DIO-ZNR 6.2V, 1902-1217.

7-139. INSTRUMENT IMPROVEMENT MODIFICATIONS.

7-140. Distortion Characteristics.

7-141. To provide lower distortion characteristics for an early serial number instrument, the components in Table 7-12 may be changed to the indicated new values. Note that not all early instruments will have exactly the same value components installed but that the replacement component values are the same for all instruments.

Table 7-12. Distortion Improvement Changes.

| PC Board | Reference Designator | Old Value | New Value* |
|--|----------------------|---------------|------------|
| 66502 | A2R16 | 90.9Ω | 110Ω |
| | A2R31,R33 | 26.7Ω | 29.4Ω |
| | A2R32 | 61.9Ω | 59Ω |
| 66503 | A2R16 | 113Ω,158Ω | 130Ω |
| | A2R31,33 | 63.4Ω | 69.8Ω |
| | A2R32 | 113Ω | 110Ω |
| | A2R38 | 487Ω | 402Ω |
| 66504 and 66508 | A4R43 | 46.4KΩ,53.6KΩ | 56.2KΩ |
| | A4R45 | 52.3KΩ,56.2KΩ | 61.9KΩ |
| 66510 | A10R31 | 49.9Ω | 75Ω |
| Note: * See Table 6-3 for part number of new value component. | | | |

7-142. Miscellaneous Improvements.

7-143. The changes described in Table 7-13 may or may not be already incorporated in some instruments. The service technician should verify the existing value of the installed component and compare it to the table values to determine whether the improvement configuration already exists.

7-144. Table 7-14 is a summary of the service notes available for the 3586A/B/C.

Table 7-13. Miscellaneous Improvements.

| PC Board | Reference Designator | Old Value | New Value* | Reason For Change |
|---|------------------------------|---|---|---|
| 66501 | A1C13 | 1500pF | 1000pF | Improves flatness of 124 Ω input. |
| 66502 and 66503 | A2C32 | 1.4-9.2pF | 1.7-11pF | Improved frequency response. |
| 66504 and 66508 | A4R59,R50 | 1000 Ω | 3300 Ω | Lower ripple on \pm 12V supplies. |
| 66505 and 66509 | A5C52 A5C55,C58 A5C62 | 15pF 62pF 68pF | 8.2pF 51pF 56pF | Improved flatness of 32.5MHz LPF and First Mixer. |
| 66505 and 66509 | A5R10 A5R11 | 33.2 Ω 100 Ω | 49.9 Ω 150 Ω | Improves reliability of A5U1. |
| 66510 | A10R20 | 287 Ω | (none) | Deleting A10R20 gives higher gain in bypass mode. |
| 66510 | A10R43 A10R44 | 500 Ω 698 Ω | 1000 Ω 1000 Ω | Increases gain and adjustment range of the 25dB amplifier. |
| 66521 66570 and 66571 | A21R69 A70R52 A70R53 | 9.1K Ω 37.4K Ω 10K Ω | 20K Ω 3.65K Ω 1000 Ω | Audio circuit improvement for Option 003 instruments. |
| 66522, 66525, and 66526 | A22U9 | 74LSO4N | 74LS14 | Corrects occasional erroneous display of Err 7. |
| 66522, 66525, and 66526 | A22C101,C102 A22C103,C104 | 30pF (none) | 24pF 56pF | Corrects LSB/USB Oscillator problem. |
| 66551 | A51R23 | 21.5 Ω | 62 Ω | Reduces L.O. feedthrough. |
| 66580 | A8OCR11 | (none) | ZNR 5.62V | Allows CMOS RAM on A60 to work with A8OBT1 removed or open. |
| (none) | CR20 | 5.6V | 6.2V | See paragraph 7-138. |
| Notes: 1. *See Table 6-3 for part number of new value (replacement component). | | | | |

Table 7-14. 3586A/B/C Service Note Index

| SERVICE NOTE # | TITLE | INSTRUMENT EFFECTIVITY |
|-----------------|---|---|
| 3586A/B/C-1 | Intermittant Failure of Self Test Step 3-2 | S/N: ALL |
| 3586A/B/C-2B | Retrofit Kit for Revision B Software | S/N: 1927A00231 and below 1928A00284 and below 1929A00195 and below |
| 3586A/B/C-3A | Interpreting Auto-Cal and Self-Test Failure Codes | S/N: ALL |
| 3586A/B/C-4 | Intermittant "ERR 8" Displays | S/N: ALL |
| 3586A/B/C-5 | Modification to Cure Intermittant Digital Problems | S/N: 1927A00256 and below 1928A00306 and below 1929A00206 and below |
| 3586A/B/C-6A | HP-IB Verification Program | S/N: ALL |
| 3586A/B/C-7 | Improving 3586A/B/C-9815S HPIB Compatibility | S/N: ALL |
| 3586A/B/C-8 | Modification to Eliminate Periodic Disturbances to Customer Circuitry | S/N:ALL |
| 3586A/B/C-9 | Replacement Kits: A50 Step Loop/ A51 Summation Loop | S/N: ALL |
| 3586A/B/C-10 | -hp- P/N 03586-68701 Service Spare Parts Kit | SN:ALL |
| P-03586-69501-1 | Frequency Reference Retrofit Kit | S/N: ALL |
| P-03586-69800-1 | Product Support Package For 3586A/B/C Selective Level Meter | S/N: ALL |